

SOT23 NPN SILICON PLANAR MEDIUM POWER TRANSISTOR

FMMT449


ISSUE 3 - NOVEMBER 1995

FEATURES

* Low equivalent on-resistance; $R_{CE(sat)} 250m\Omega$ at 1A

COMPLEMENTARY TYPE – FMMT549

PARTMARKING DETAIL – 449



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	2	A
Continuous Collector Current	I_C	1	A
Base Current	I_B	200	mA
Power Dissipation at $T_{amb} = 25^\circ C$	P_{tot}	500	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ C$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	50		V	$I_C = 1mA, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30		V	$I_C = 10mA, I_B = 0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5		V	$I_E = 100\mu A, I_C = 0$
Collector Cut-Off Current	I_{CBO}		0.1 10	μA μA	$V_{CB} = 40V, I_E = 0$ $V_{CB} = 40V, T_{amb} = 100^\circ C$
Emitter Cut-Off Current	I_{EBO}		0.1	μA	$V_{EB} = 4V, I_C = 0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		0.5 1.0	V V	$I_C = 1A, I_B = 100mA^*$ $I_C = 2A, I_B = 200mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		1.25	V	$I_C = 1A, I_B = 100mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		1.0	V	$I_C = 1A, V_{CE} = 2V^*$
Static Forward Current Transfer Ratio	h_{FE}	70 100 80 40	300		$I_C = 50mA, V_{CE} = 2V^*$ $I_C = 500mA, V_{CE} = 2V^*$ $I_C = 1A, V_{CE} = 2V^*$ $I_C = 2A, V_{CE} = 2V^*$
Transition Frequency	f_T	150		MHz	$I_C = 50mA, V_{CE} = 10V$ $f = 100mHz$
Output Capacitance	C_{obo}		15	pF	$V_{CB} = 10V, f = 1MHz$


*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

Spice parameter data is available upon request for this device


TYPICAL CHARACTERISTICS

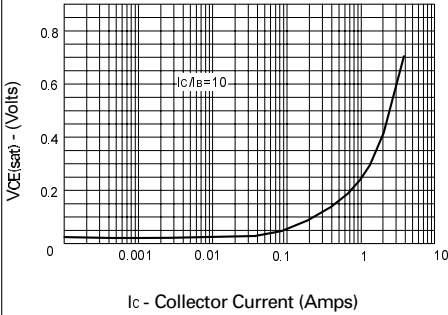


$V_{CE(sat)}$ v I_C

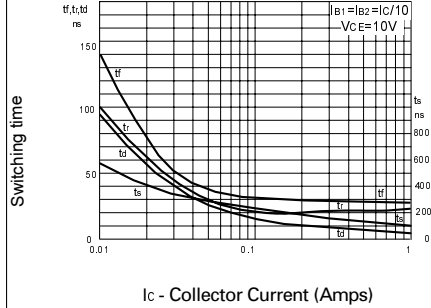


Switching Speeds

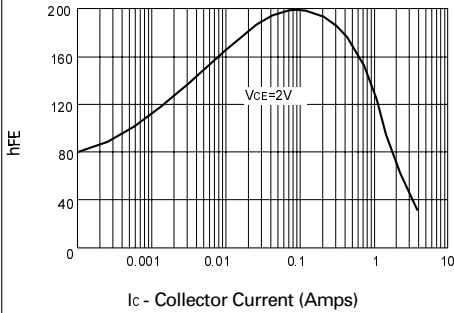


h_{FE} v I_C

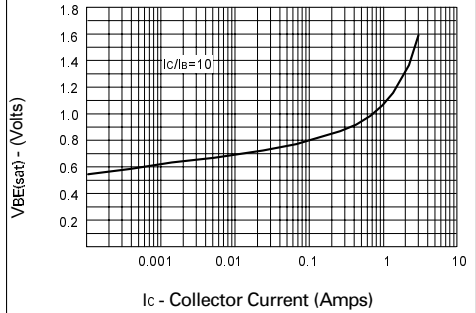

$V_{BE(sat)}$ v I_C

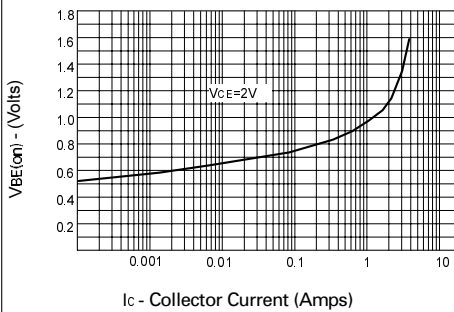

$V_{BE(on)}$ v I_C

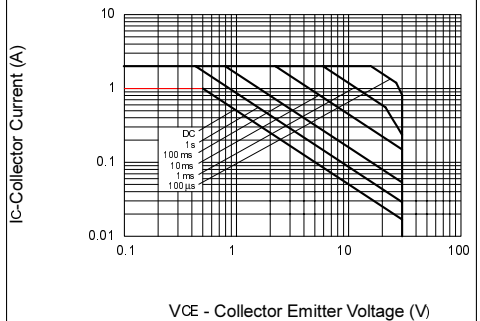

Safe Operating Area



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.