

# E-Series Surface Mount Mixer

## 10 - 2000 MHz

# ESMD-C15

V3.00

### Features

- LO Power: +10 dBm
- Up to +5 dBm RF
- Surface Mount

### Specifications @ 25°C

Frequency Range		
RF		10 - 2000 MHz
LO		10 - 2000 MHz
IF		10 - 800 MHz
Conversion Loss (dB)	Typical	Maximum
20 - 1000 MHz	6.5	8.0
10 - 2000 MHz	6.5	8.5
Isolation (dB)	Typical	Minimum
LO to RF		
10 - 2000 MHz	35	25
LO to IF		
10 - 2000 MHz	30	20

### Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 5 dBm


### Ordering Information

<b>Part No.</b>	<b>Packaging</b>
ESMD-C15	Tube
ESMD-C15TR	Forward Tape & Reel

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

### SM-2

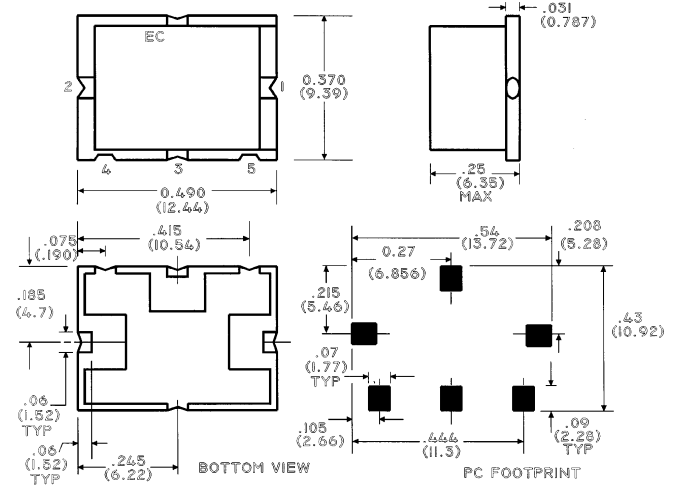

Dimensions in ( ) are in mm.  
 Unless Otherwise Noted: .x = ±0.04 (1.00)  
 .xx = ±0.02 (0.50)  
 .xxx = ±0.010 (0.250)

### Pin Configuration

Function	Pin No.
LO	2
RF	1
IF	3
Ground	4,5

S 0146 C

Specifications Subject to Change Without Notice.

**M/A-COM, Inc.**

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.