


MACOM E - Series Surface Mount Mixer

890 - 915 MHz

ESMD-C2HX2

ESMD - C2HX2



SM-2

Features


- Lo Power +17 dBm
- Up to +14dBm RF
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		890-915 MHz
LO		819-844 MHz
IF		71 MHz
Conversion Loss (dB)	Typical	Minimum
890-915 MHz	-	7.5
Isolation (dB)	Typical	Minimum
LO To RF		
819-844 MHz	-	25
LO To IF		
		15

Operating Characteristics

Impedance	50 Ω Nominal
RF Input for 1 dB Compression	+ 14 dBm

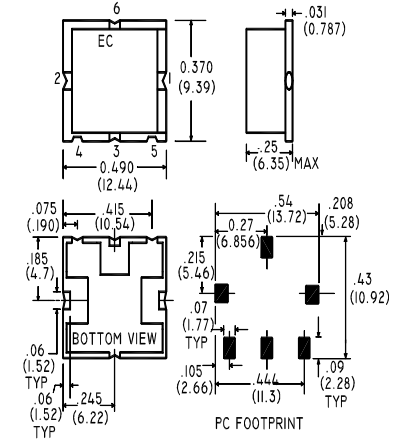

Function	Pin No.
LO	2
RF	1
IF	3
Ground	4,5,6
Case Ground	-
Unconnected	-

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 seconds)	260°C

Note: Specifications subject to change without notice

Two Tone Third Order Input Intercept: Test Conditions

RF1	890 MHz @ 0 dBm
RF2	891 MHz @ 0 dBm
LO	820 MHz @ +17 dBm

IIP3 Spec: +29 dBm TYPical, +27 dBm Min

Voltage Standing Wave Ratio's

LO VSWR	Max	2.0:1
RF VSWR	Max	1.7:1
IF VSWR	Max	2.0:1

Specifications subject to change without notice.

- North America: Tel. (800) 366-2266, Fax (800) 618-8883
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

tyco / Electronics

MACOM



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.