


General Purpose Transistors

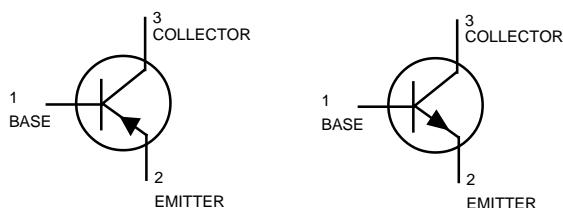


PNP
BCX17LT1
BCX18LT1
NPN
BCX19LT1
BCX20LT1

Voltage and current are negative for PNP transistors

MAXIMUM RATINGS

Rating	Symbol	Value		Unit
		BCX17LT1 BCX19LT1	BCX18LT1 BCX20LT1	
Collector–Emitter Voltage	V_{CEO}	45	25	Vdc
Collector–Base Voltage	V_{CBO}	50	30	Vdc
Emitter–Base Voltage	V_{EBO}	5.0	5.0	Vdc
Collector Current — Continuous	I_C	500	500	mAdc



CASE 318–08, STYLE 6
 SOT–23 (TO–236AB)

DEVICE MARKING

BCX17LT1 = T1; BCX18LT1 = T2; BCX19LT1 = U1; BCX20LT1 = U2

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR– 5 Board, (1) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	225	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate, (2) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	300	mW
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{stg}	–55 to +150	$^\circ\text{C}$

1. FR–5 = 1.0 x 0.75 x 0.062 in.

2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.

PNP BCX17LT1 BCX18LT1
NPN BCX19LT1 BCX20LT1

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage ($I_C = 10 \text{ mAdc}, I_B = 0$)	$V_{(BR)CEO}$	45	—	—	Vdc
	BCX17, 19	25	—	—	
	BCX18, 20				
Collector–Emitter Breakdown Voltage ($I_C = 10 \mu\text{Adc}, I_C = 0$)	$V_{(BR)CES}$	50	—	—	Vdc
	BCX17, 19	30	—	—	
	BCX18, 20				
Collector Cutoff Current ($V_{CB} = 20 \text{ Vdc}, I_E = 0$)	I_{CBO}	—	—	100	nAdc
($V_{CB} = 20 \text{ Vdc}, I_E = 0, T_A = 150^\circ\text{C}$)		—	—	5.0	μAdc
Emitter Cutoff Current ($V_{EB} = 5.0 \text{ Vdc}, I_C = 0$)	I_{EBO}	—	—	10	μAdc

ON CHARACTERISTICS

DC Current Gain ($I_C = 100 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$)	h_{FE}	100	—	600	—
($I_C = 300 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$)		70	—	—	
($I_C = 500 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$)		40	—	—	
Collector–Emitter Saturation Voltage ($I_C = 500\text{mAdc}, I_B = 50\text{mAdc}$)	$V_{CE(sat)}$	—	—	0.62	Vdc
Base–Emitter On Voltage ($I_C = 500 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$)	$V_{BE(on)}$	—	—	1.2	Vdc



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.