PNP Silicon AF Power Transistor

- Drain switch for RF power amplifier stages
- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage

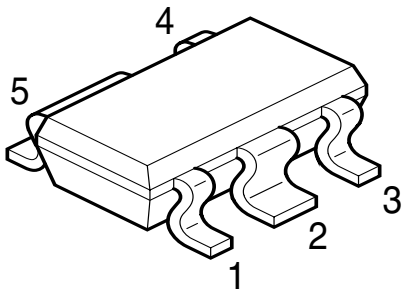

Type	Marking	Pin Configuration					Package
BCP 72M	PAs	1 = E1	2 = C	3 = E2	4 = B	5 = C	SCT-595

Maximum Ratings (E1 and E2 connected externaly)

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	10	V
Collector-base voltage	V_{CBO}	10	
Emitter-base voltage	V_{EBO}	5	
DC collector current	I_C	3	A
Peak collector current	I_{CM}	6	A
Base current	I_B	200	mA
Peak base current	I_{BM}	500	
Total power dissipation, $T_S \leq 94$ °C	P_{tot}	1.7	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Junction ambient 1)	R_{thJA}	≤ 88	K/W
Junction - soldering point	R_{thJS}	≤ 33	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm^2 Cu

Electrical Characteristics

at T_A = 25°C, unless otherwise specified and E1 and E2 connected externaly

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage I_C = 10 mA, I_B = 0	$V_{(BR)CEO}$	10	-	-	V
Collector-base breakdown voltage I_C = 100 µA, I_B = 0	$V_{(BR)CBO}$	10	-	-	
Emitter-base breakdown voltage I_E = 10 µA, I_C = 0	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current V_{CB} = 8 V, I_E = 0	I_{CBO}	-	-	100	nA
Collector cutoff current V_{CB} = 8 V, I_E = 0 , T_A = 150 °C	I_{CBO}	-	-	20	µA
Emitter cutoff current V_{EB} = 4 V, I_C = 0	I_{EBO}	-	-	100	nA
DC current gain 1) I_C = 10 mA, V_{CE} = 5 V I_C = 500 mA, V_{CE} = 1 V I_C = 2 A, V_{CE} = 2 V	h_{FE}	 25 85 50	 - - -	 - 475 -	-
Collector-emitter saturation voltage1) I_C = 2 A, I_B = 0.2 A	V_{CEsat}	-	0.15	-	V
Base-emitter saturation voltage 1) I_C = 2 A, I_B = 0.2 A	V_{BEsat}	-	-	1.2	V
AC Characteristics					
Transition frequency I_C = 50 mA, V_{CE} = 10 V, f = 100 MHz	f_T	-	100	-	MHz
Collector-base capacitance V_{CB} = 10 V, f = 1 MHz	C_{cb}	-	100	-	pF

1) Pulse test: t < 300µs; D < 2%

Total power dissipation $P_{tot} = f(T_A{}^*; T_S)$

* Package mounted on epoxy

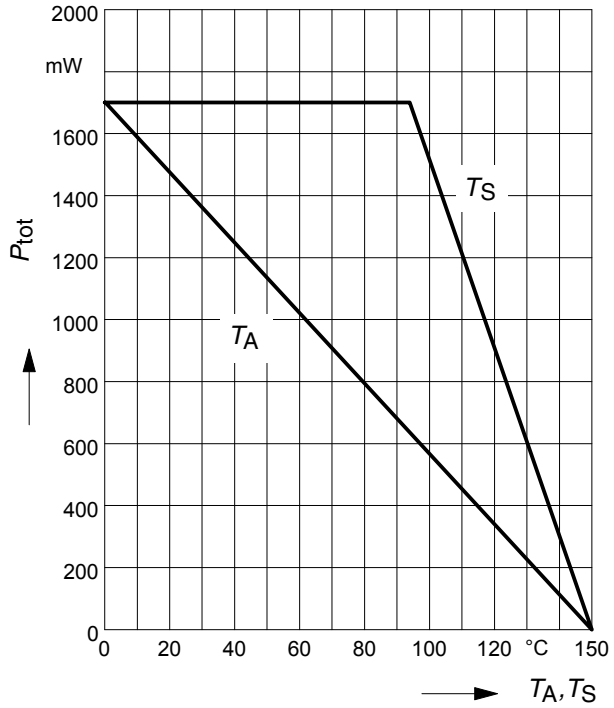

Permissible Pulse Load $R_{thJS} = f(t_p)$

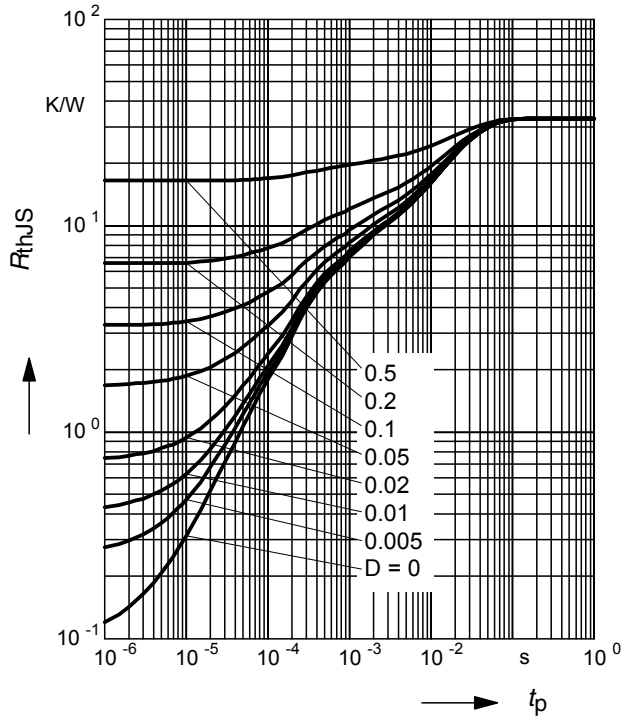

Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

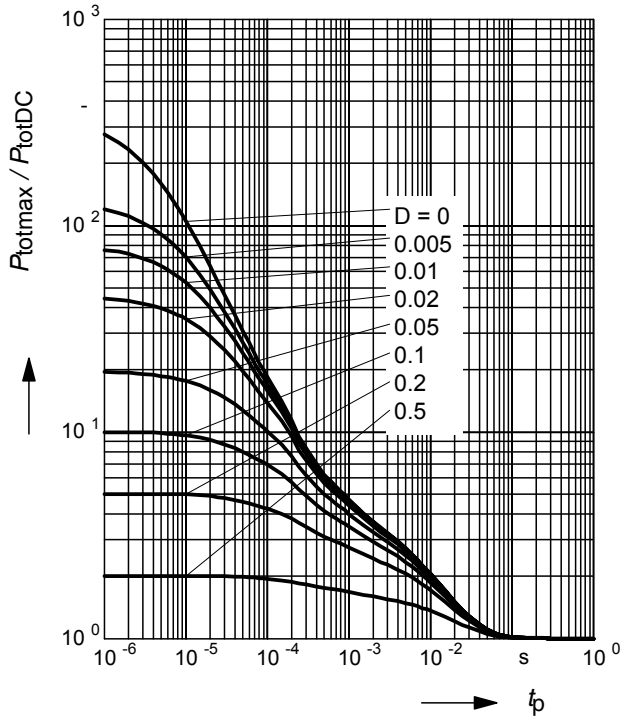

DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 2V$

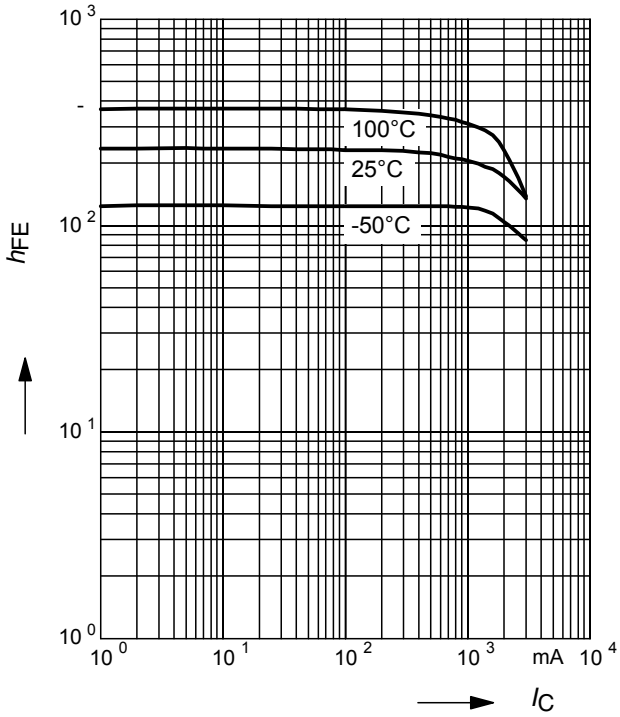

Collector-emitter saturation voltage

$I_C = f(V_{CEsat})$, $h_{FE} = 10$

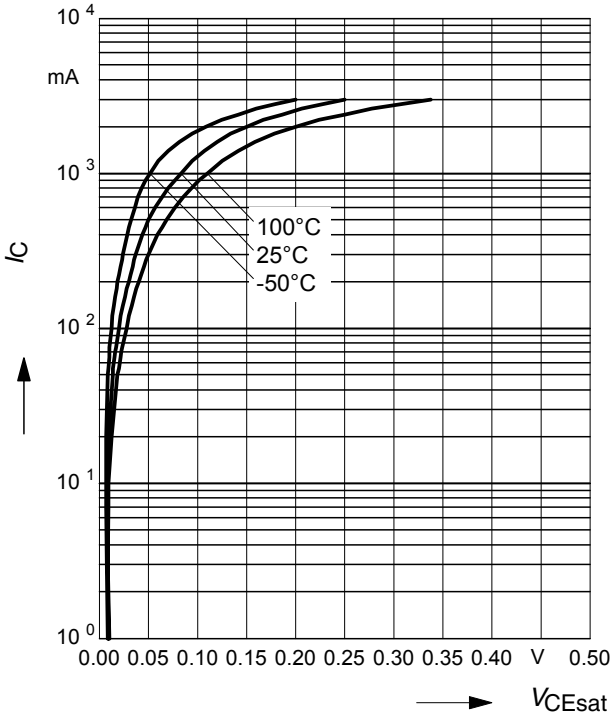

Base-emitter saturation voltage

$I_C = f(V_{BEsat})$, $h_{FE} = 10$

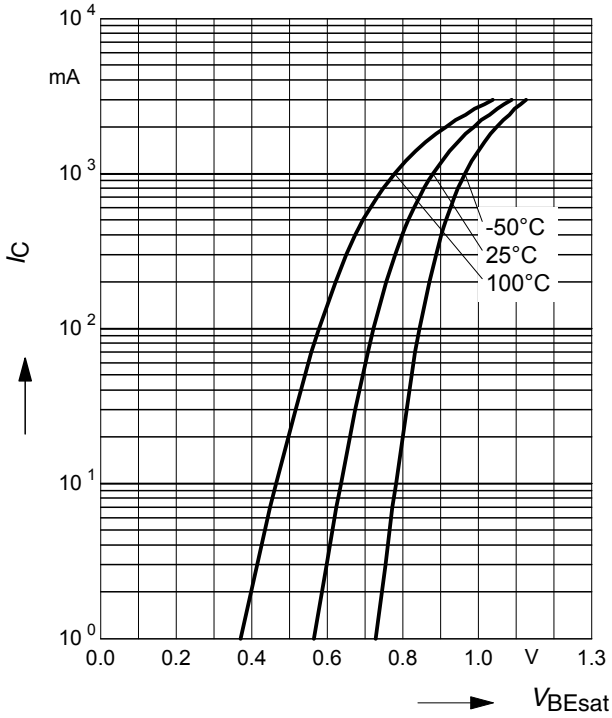

Collector current $I_C = f(V_{BE})$

$V_{CE} = 2V$

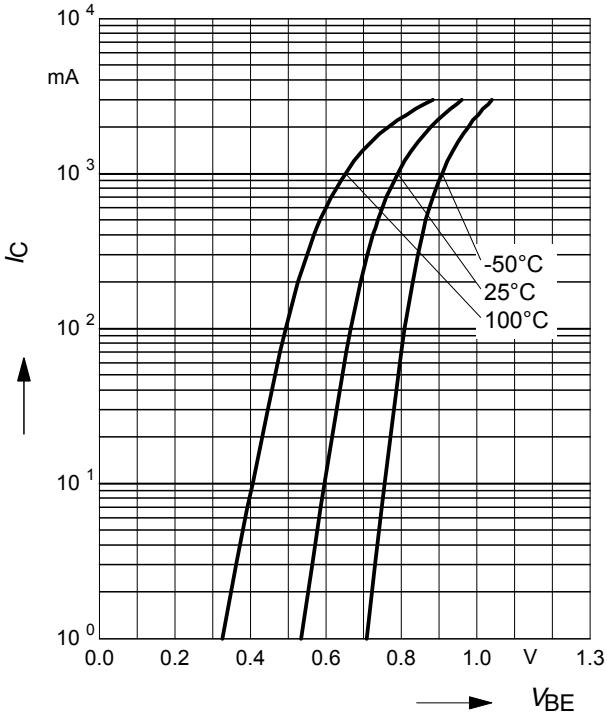

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.