


NPN Silicon AF Transistors

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types:
 BC856T, BC857T,
 BC858T, BC859T, BC860T

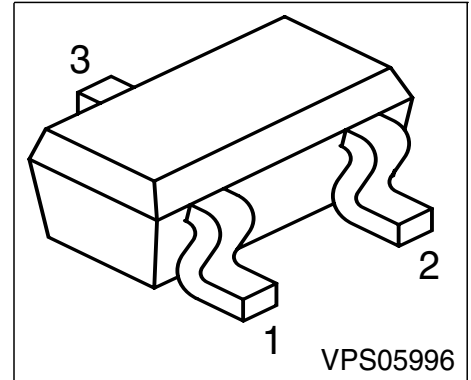

Type	Marking	Pin Configuration			Package
BC846AT	1As	1 = B	2 = E	3 = C	SC75
BC846BT	1Bs	1 = B	2 = E	3 = C	SC75
BC847AT	1Es	1 = B	2 = E	3 = C	SC75
BC847BT	1Fs	1 = B	2 = E	3 = C	SC75
BC847CT	1Gs	1 = B	2 = E	3 = C	SC75
BC848AT	1Js	1 = B	2 = E	3 = C	SC75
BC848BT	1Ks	1 = B	2 = E	3 = C	SC75
BC848CT	1Ls	1 = B	2 = E	3 = C	SC75
BC849BT	2Bs	1 = B	2 = E	3 = C	SC75
BC849CT	2cs	1 = B	2 = E	3 = C	SC75
BC850BT	2Fs	1 = B	2 = E	3 = C	SC75
BC850CT	2Gs	1 = B	2 = E	3 = C	SC75

Maximum Ratings

Parameter	Symbol	BC846T	BC847T BC850T	BC848T BC849T	Unit
Collector-emitter voltage	V_{CEO}	65	45	30	V
Collector-base voltage	V_{CBO}	80	50	30	
Collector-emitter voltage	V_{CES}	80	50	30	
Emitter-base voltage	V_{EBO}	6	6	5	
DC collector current	I_C	100			mA
Peak collector current	I_{CM}	200			mA
Peak base current	I_{BM}	200			
Peak emitter current	I_{EM}	200			
Total power dissipation, $T_S = 109\text{ °C}$	P_{tot}	250			mW
Junction temperature	T_j	150			°C
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤165	K/W
--	------------	------	-----

Electrical Characteristics at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage	$V_{(BR)CEO}$				V
$I_C = 10\text{ mA}, I_B = 0$ BC846T		65	-	-	
$I_C = 10\text{ mA}, I_B = 0$ BC847T/BC850T		45	-	-	
$I_C = 10\text{ mA}, I_B = 0$ BC848T/BC849T		30	-	-	
Collector-base breakdown voltage	$V_{(BR)CBO}$				
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC846T		80	-	-	
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC847T/850T		50	-	-	
$I_C = 10\text{ }\mu\text{A}, I_E = 0$ BC848T/849T		30	-	-	

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC846T	$V_{(BR)CES}$	65	-	-	V
$I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC847T/850T		50	-	-	
$I_C = 10 \mu\text{A}$, $V_{BE} = 0$ BC848T/849T		30	-	-	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}$, $I_C = 0$ BC846T	$V_{(BR)EBO}$	6	-	-	
$I_E = 1 \mu\text{A}$, $I_C = 0$ BC847T/BC850T		6	-	-	
$I_E = 1 \mu\text{A}$, $I_C = 0$ BC848T/BC849T		5	-	-	
Collector cutoff current $V_{CB} = 30 \text{ V}$, $I_E = 0$	I_{CBO}	-	-	15	nA
Collector cutoff current $V_{CB} = 30 \text{ V}$, $I_E = 0$, $T_A = 150^\circ\text{C}$	I_{CBO}	-	-	5	μA
DC current gain 1) $I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group A	h_{FE}	-	140	-	-
$I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group B		-	250	-	
$I_C = 10 \mu\text{A}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group C		-	480	-	
DC current gain 1) $I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group A	h_{FE}	110	180	220	
$I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group B		200	290	450	
$I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$ h_{FE} -group C		420	520	800	
Collector-emitter saturation voltage1) $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	V_{CEsat}	-	90	250	mV
$I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$		-	200	600	
Base-emitter saturation voltage 1) $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	V_{BEsat}	-	700	-	
$I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$		-	900	-	
Base-emitter voltage 1) $I_C = 2 \text{ mA}$, $V_{CE} = 5 \text{ V}$	$V_{BE(ON)}$	580	660	700	
$I_C = 10 \text{ mA}$, $V_{CE} = 5 \text{ V}$		-	-	770	

 1) Pulse test: $t \leq 300 \mu\text{s}$, $D = 2\%$


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 20\text{ mA}, V_{CE} = 5\text{ V}, f = 100\text{ MHz}$	f_T	-	250	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	C_{cb}	-	3	-	pF
Emitter-base capacitance $V_{EB} = 0.5\text{ V}, f = 1\text{ MHz}$	C_{eb}	-	8	-	
Short-circuit input impedance $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{11e}	-	2.7 4.7 8.7	-	k Ω
Open-circuit reverse voltage transf.ratio $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{12e}	-	1.5 2 3	-	10^{-4}
Short-circuit forward current transf.ratio $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{21e}	-	200 330 600	-	-
Open-circuit output admittance $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group A $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group B $I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, f = 1\text{ kHz}$ hFE-group C	h_{22e}	-	18 30 60	-	μS


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Noise figure $I_C = 200 \mu\text{A}$, $V_{CE} = 5 \text{ V}$, $R_S = 2 \text{ k}\Omega$, $f = 1 \text{ kHz}$, $\Delta f = 200 \text{ Hz}$ BC849T	F	-	1.2	4	dB
$I_C = 200 \mu\text{A}$, $V_{CE} = 5 \text{ V}$, $R_S = 2 \text{ k}\Omega$, $f = 1 \text{ kHz}$, $\Delta f = 200 \text{ Hz}$ BC850T		-	1	4	
Equivalent noise voltage $I_C = 200 \mu\text{A}$, $V_{CE} = 5 \text{ V}$, $R_S = 2 \text{ k}\Omega$, $f = 10 \dots 50 \text{ Hz}$ BC850T	V_n	-	-	0.135	μV

Total power dissipation $P_{tot} = f(T_S)$

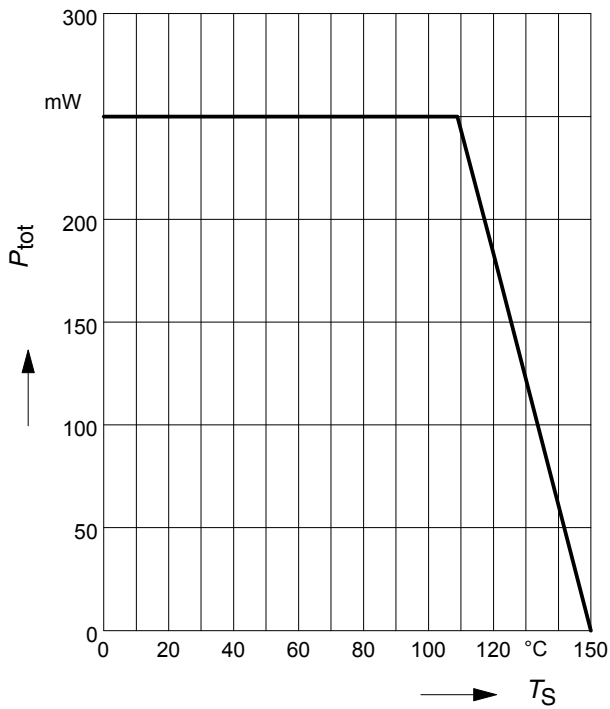


**Collector-base capacitance $C_{CB} = f(V_{CB0})$
Emitter-base capacitance $C_{EB} = f(V_{EB0})$**

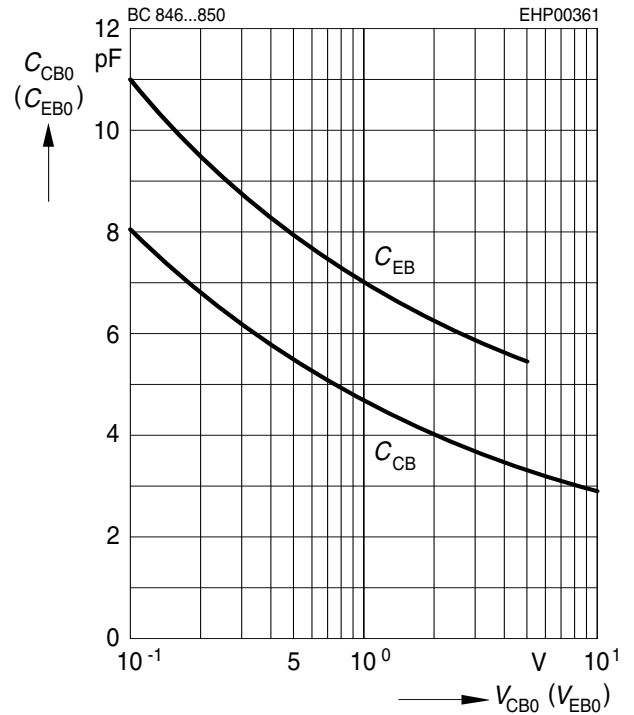


Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

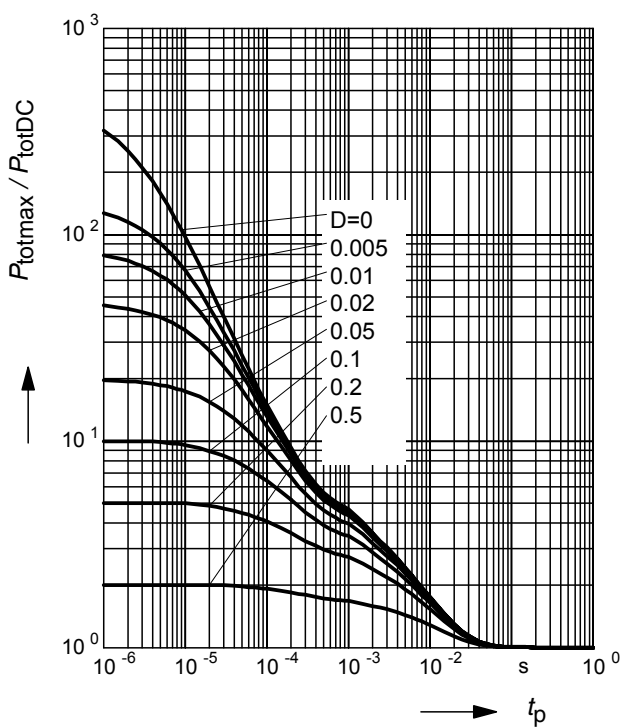


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

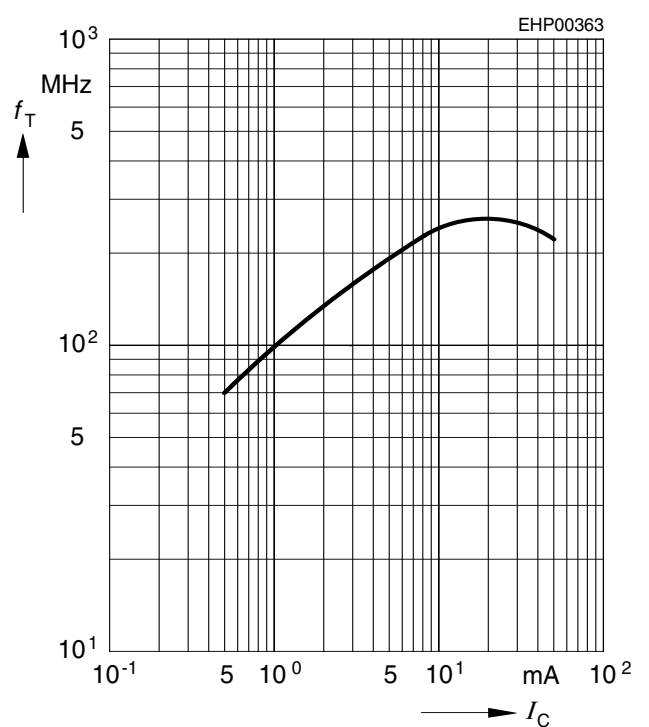


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

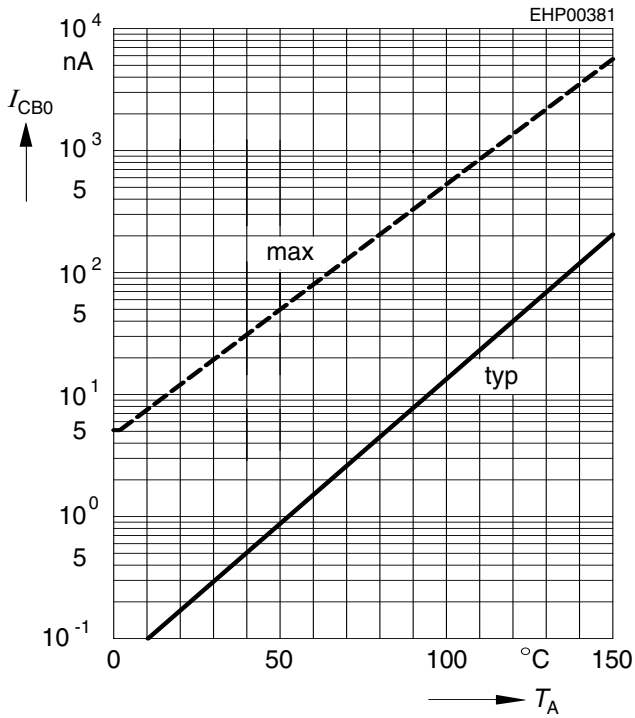


Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 20$

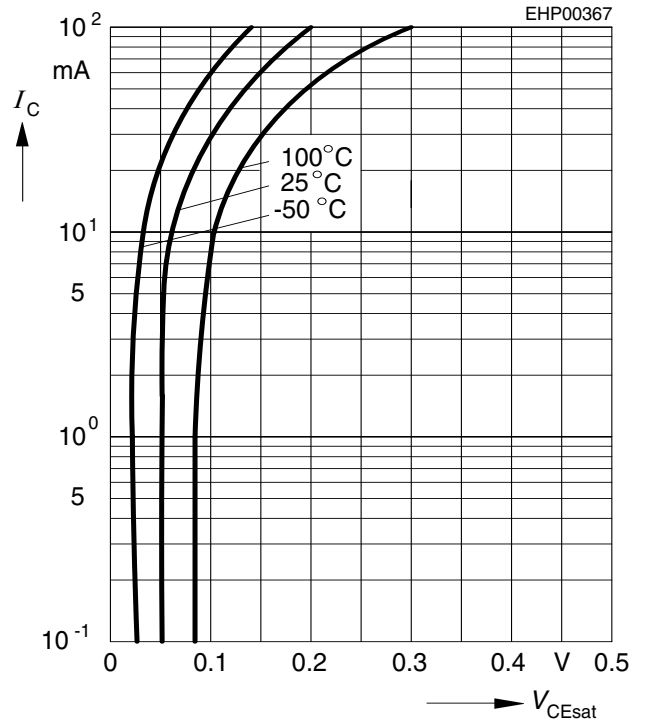


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$

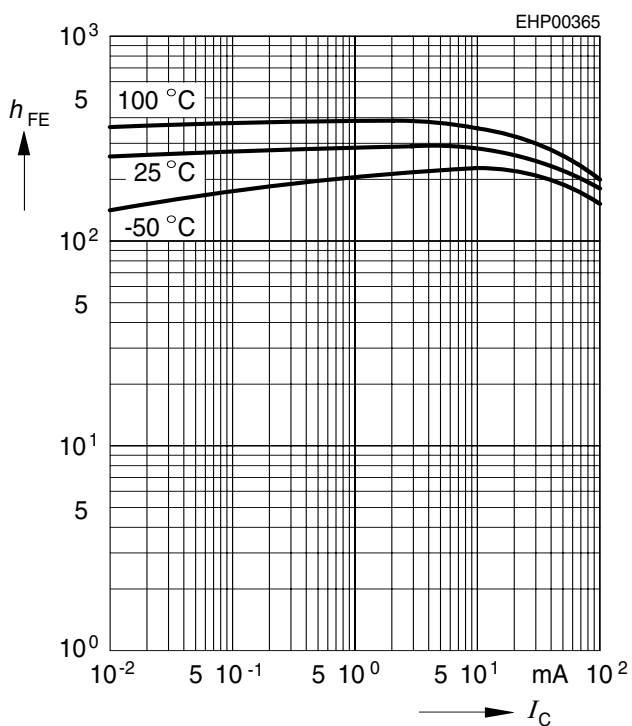


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 20$

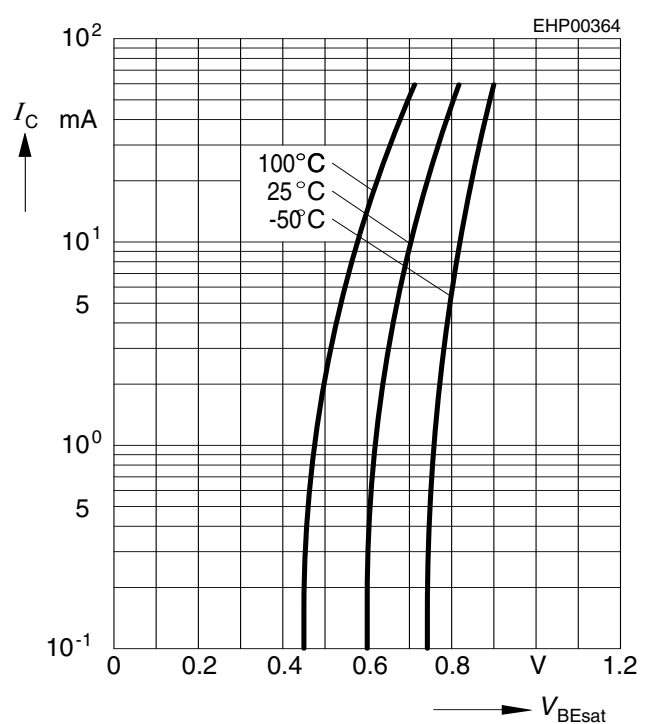


h parameter $h_e = f(I_C)$ normalized

$V_{CE} = 5V$

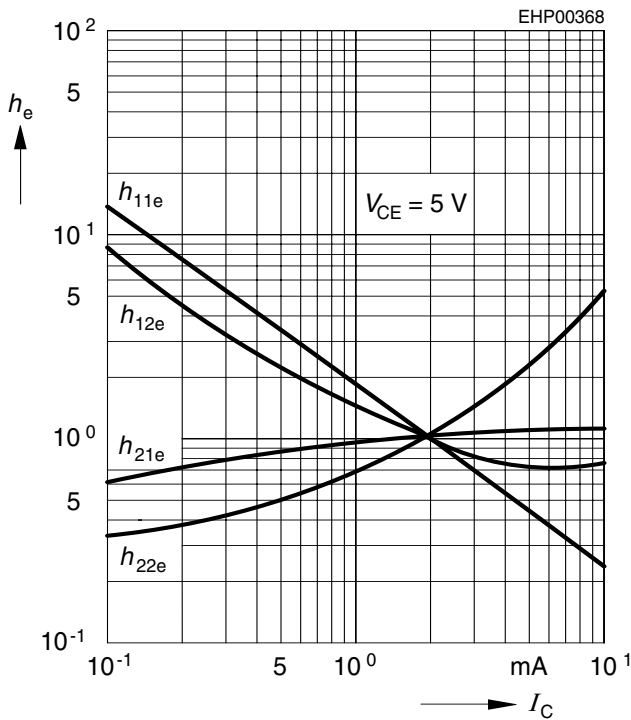


h parameter $h_e = f(V_{CE})$ normalized

$I_C = 2mA$

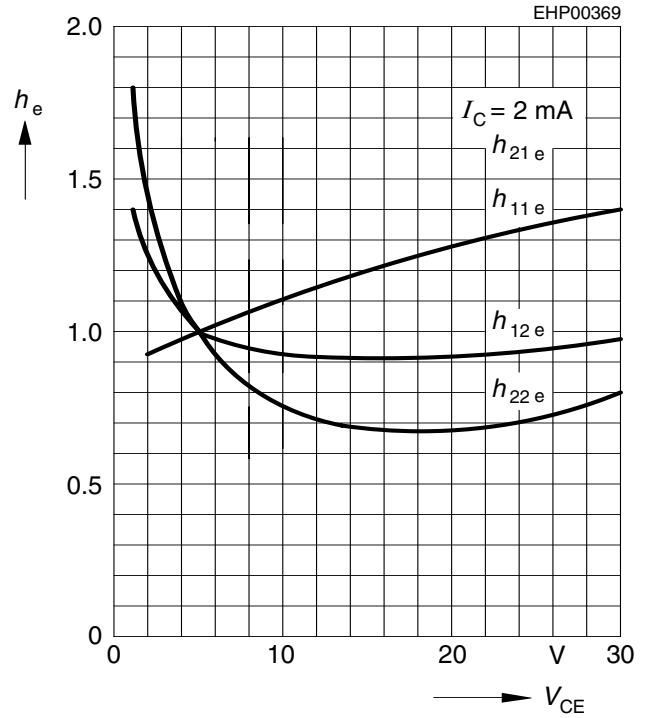


Noise figure $F = f(V_{CE})$

$I_C = 0.2mA, R_S = 2k\Omega, f = 1kHz$

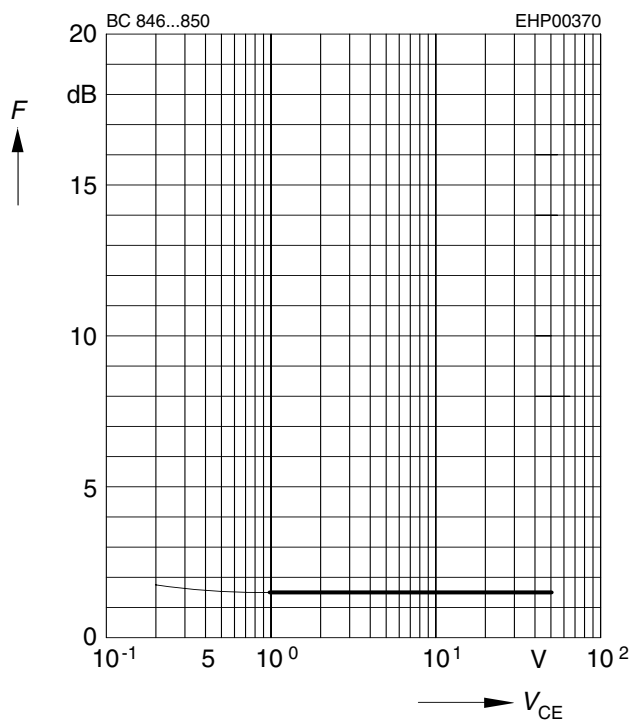


Noise figure $F = f(f)$

$I_C = 0.2mA, V_{CE} = 5V, R_S = 2k\Omega$

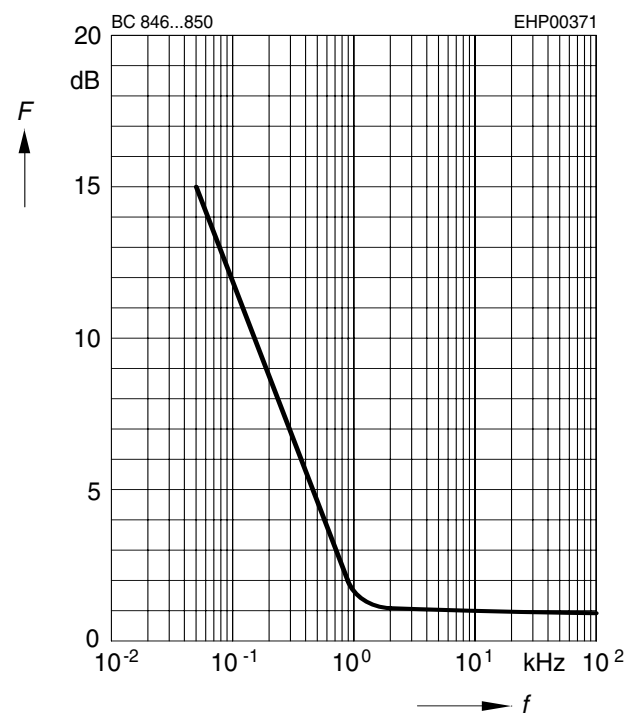


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 120Hz$

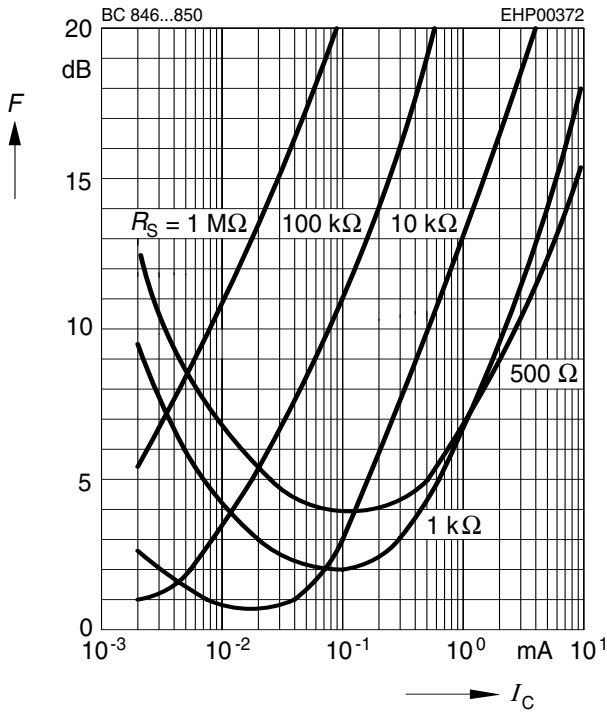


Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 1kHz$

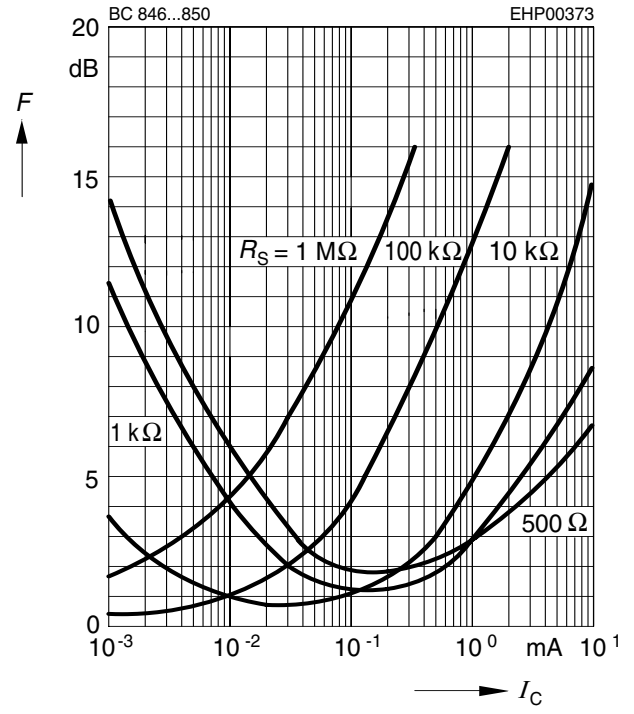

Noise figure $F = f(I_C)$

$V_{CE} = 5V, f = 10kHz$

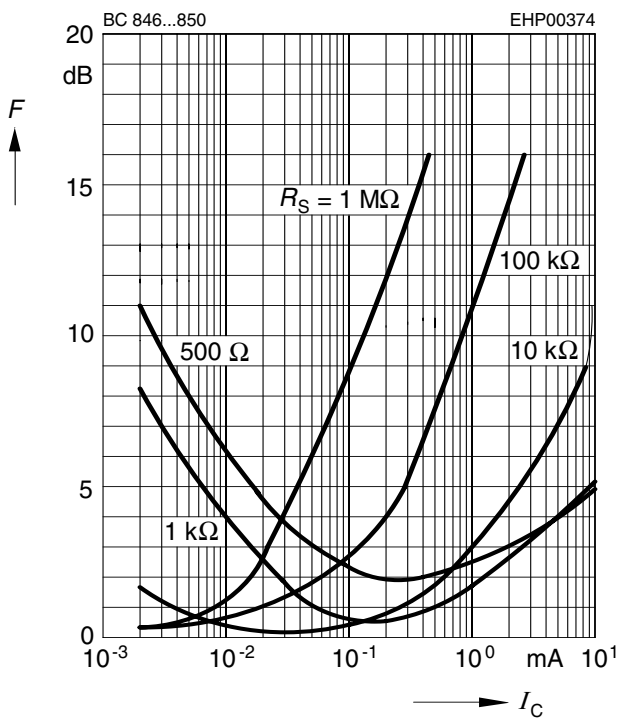

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.