


Features

- Low Forward Voltage Drop
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection
- Also Available in Lead Free Version





Mechanical Data

- Case: SOT-23, Molded Plastic
- Case material - UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 2
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Marking Code: See Diagrams Below & Page 2

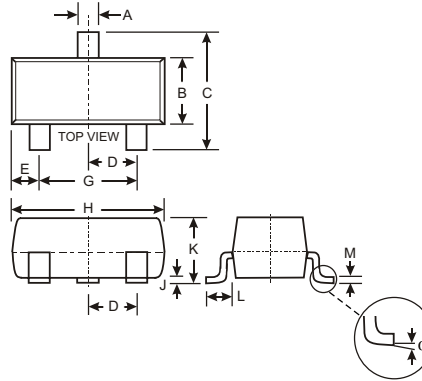

| SOT-23 | | |
|----------------------|-------|-------|
| Dim | Min | Max |
| A | 0.37 | 0.51 |
| B | 1.20 | 1.40 |
| C | 2.30 | 2.50 |
| D | 0.89 | 1.03 |
| E | 0.45 | 0.60 |
| G | 1.78 | 2.05 |
| H | 2.80 | 3.00 |
| J | 0.013 | 0.10 |
| K | 0.903 | 1.10 |
| L | 0.45 | 0.61 |
| M | 0.085 | 0.180 |
| α | 0° | 8° |
| All Dimensions in mm | | |

TOP VIEW



Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|---------------------------------|-------------|---------------------------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 40 | V |
| Forward Continuous Current (Note 1) | I_{FM} | 200 | mA |
| Power Dissipation (Note 1) | P_d | 350 | mW |
| Forward Surge Current (Note 1) @ $t < 1.0\text{s}$ | I_{FSM} | 600 | mA |
| Thermal Resistance, Junction to Ambient Air (Note 1) | $R_{\theta JA}$ | 357 | $^\circ\text{C}/\text{W}$ |
| Operating Temperature Range | T_J | -55 to +125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 to +150 | $^\circ\text{C}$ |

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|------------------------------------|-------------|-----|-----|-------------|------|---|
| Reverse Breakdown Voltage (Note 2) | $V_{(BR)R}$ | 40 | — | — | V | $I_R = 10\mu\text{A}$ |
| Forward Voltage (Note 2) | V_F | — | — | 380 1000 | mV | $t_p < 300\mu\text{s}$, $I_F = 1.0\text{mA}$ $t_p < 300\mu\text{s}$, $I_F = 40\text{mA}$ |
| Reverse Leakage Current (Note 2) | I_R | — | 20 | 200 | nA | $t_p < 300\mu\text{s}$, $V_R = 30\text{V}$ |
| Total Capacitance | C_T | — | 4.0 | 5.0 | pF | $V_R = 0\text{V}$, $f = 1.0\text{MHz}$ |
| Reverse Recovery Time | t_{rr} | — | — | 5.0 | ns | $I_F = I_R = 10\text{mA}$ to $I_R = 1.0\text{mA}$, $R_L = 100\Omega$ |

Note: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
2. Short duration test pulse used to minimize self-heating effect.

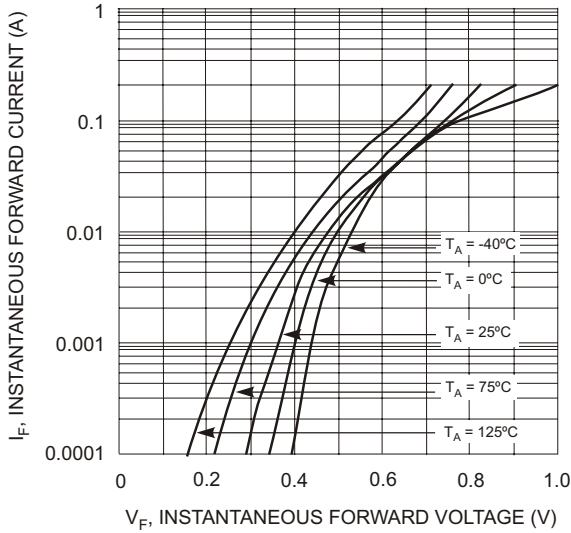


Fig. 1 Typical Forward Voltage

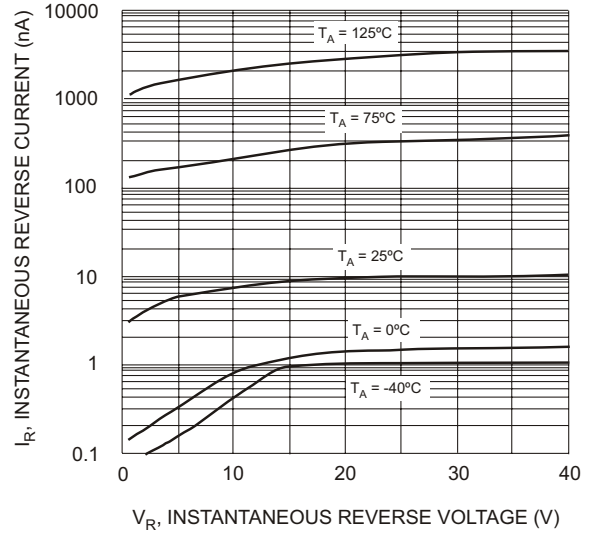


Fig. 2 Typical Reverse Characteristics

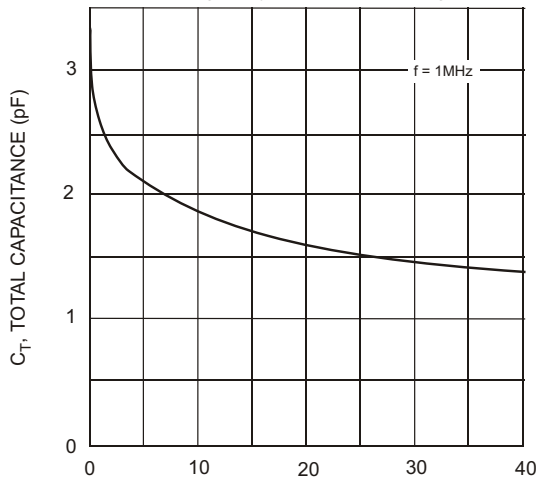


Fig. 3 Typical Capacitance

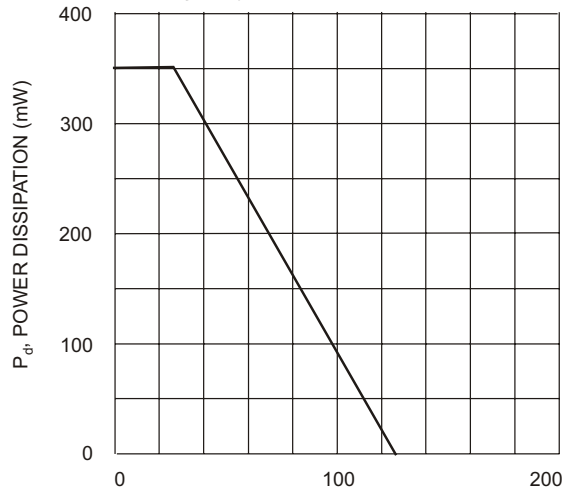



Fig. 4 Power Derating Curve, Total Package

Ordering Information (Note 3)

| Device | Packaging | Shipping |
|------------|-----------|------------------|
| BAS40-7 | SOT-23 | 3000/Tape & Reel |
| BAS40-04-7 | SOT-23 | 3000/Tape & Reel |
| BAS40-05-7 | SOT-23 | 3000/Tape & Reel |
| BAS40-06-7 | SOT-23 | 3000/Tape & Reel |

- Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 4. For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.
 Example: BAS40-06-7-F.

Marking Information



XXX = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

| Year | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | K | L | M | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.