

■ Pin Descriptions

Pin No.	Description	Pin No.	Description
1	AM detection output	17	FM-PIN diode driver
2	V _{CC1}	18	AM-OSC coil pin
3	AM-IF counter output/DX/LO SW	19	FM-mix. output 2
4	AM-SD output	20	FM-mix. output 1
5	AM-signal meter output	21	FM-PIN diode driver
6	FM-IF output	22	FM-mix. input
7	AM-IF output	23	V _{CC2} /FM/AM SW
8	GND1	24	FM-AGC output
9	SSC	25	FM-OSC buffer output
10	AM-RF level detection	26	AM-OSC buffer output/FE-AGC sensitivity setting
11	AM-WAGC detection/DX setting	27	GND2
12	AM-IF input	28	FM-OSC coil pin
13	AM-mix. output	29	FM-keyed-AGC input
14	FM-IF input	30	AM-AM output/LO setting
15	AM-RF gain control	31	AM-ATC input
16	AM-mix. input	32	AM-IF level detection

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	9.1	V
Supply current	I _{CC}	56	mA
Power dissipation *2	P _D	343.3	mW
Operating ambient temperature *1	T _{opr}	-35 to +80	°C
Storage temperature *1	T _{stg}	-55 to +125	°C

Note) *1: T_a = 25°C except power dissipation, operating ambient temperature and storage temperature.

*2: Referring to "■ Technical Information" for power dissipation at T_a = 80°C, use the circuit under the conditions not exceeding the allowable limit value.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V _{CC}	7.2 to 9.0	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

• AM mode at $V_{CC} = 8.0\text{ V}$, $f_{IN2} = 1\text{ MHz}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
AM consumption current 1	amL _{T1}	Without input	28	36	44	mA
AM consumption current 2	amL _{T2}	$f_{IN2} = 1\text{ MHz}$, $V_{IN2} = 130\text{ dB}\mu$	33	41	49	mA
AM-AF output	amV _O	$V_{IN2} = 74\text{ dB}\mu$, 400 Hz 30%, AM-AF output	105	135	160	mV
AM signal-to-noise ratio	amSN	$V_{IN2} = 74\text{ dB}\mu$, 400 Hz 30%, AM-AF output S/N	48	52	58	dB
AM-AGC width	amW	$V_{IN2} = 74\text{ dB}\mu$, 400 Hz 30%, AM-AF output -10 dB input change	56	60	64	dB
AM-ATC operation	amATC	(Output ratio [dB] of 400 Hz and 3 kHz when $V_{IN2} = 18\text{ dB}\mu$) – (output ratio [dB] of 400 Hz and 3 kHz when V_{IN2} = $74\text{ dB}\mu$) 80%Mod., AM-AF _{OUT} output	3.5	6.5	9.5	dB
AM-distortion rate 1	amT1	$V_{IN2} = 74\text{ dB}\mu$, 400 Hz 80%, AM-AF output distortion	0.01	0.5	1.5	%
AM-distortion rate 2	amT2	$V_{IN2} = 130\text{ dB}\mu$, 400 Hz 80%, AM-AF output distortion	0.01	0.5	1.5	%
AM wide band AGC on input	amV _W	$f_{IN2} = 1.4\text{ MHz}$, input when pin 15 voltage becomes below 3 V	96	102	108	dB μ
AM local oscillation buffer output	amV _{OS}	Without input	160	210	260	mV
AM-IF count output 1	amIF1	$V_{IN2} = 40\text{ dB}\mu$	150	210	270	mV
AM-IF count output 2	amIF2	Without input	—	—	10	mV
AM-SD output 1	amSD1	$V_{IN2} = 40\text{ dB}\mu$	4.5	4.9	5.1	V
AM-SD output 2	amSD2	Without input	0.0	0.2	0.5	V
AM signal meter output 1	amV _{S1}	Without input, pin 5 voltage	1	50	200	mV
AM signal meter output 2	amV _{S2}	$V_{IN2} = 30\text{ dB}\mu$, pin 5 voltage	0.8	1.05	1.3	V
AM signal meter output 3	amV _{S3}	$V_{IN2} = 130\text{ dB}\mu$, pin 5 voltage	4.1	4.8	5.1	V
AM search sensitivity DX	amDX	AM-IF count output is over 120 mV V_{IN2} when f becomes $450\text{ kHz}\pm 2\text{ kHz}$	23	29	35	dB μ
AM search sensitivity LO	amLO	AM-IF count output is over 120 mV V_{IN2} when f becomes $450\text{ kHz}\pm 2\text{ kHz}$	43	49	55	dB μ

Note) FM tuning condition: Adjust V_{ATU} voltage so that V_{AOSC} output frequency becomes $1\ 450\text{ kHz}\pm 500\text{ Hz}$

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)


- FM mode at $V_{CC} = 8.0\text{ V}$, $f_{IN1} = 98\text{ MHz}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
FM local oscillation buffer output	fmV _{OS}	$f_{OSC} = 108.7\text{ MHz}$, without input	140	200	260	mV
FM-IF output level	fmIF	$V_{IN1} = 71\text{ dB}\mu$	40	75	110	mV
FM-AGC sensitivity	fmAGC	V_{IN1} level when V_{24} becomes 3 V	60	64	68	dB μ
High-level FM-AGC voltage	fmV _{AH}	$V_{IN1} = 70\text{ dB}\mu$	6.0	6.4	6.8	V
Low-level FM-AGC voltage	fmV _{AL}	$V_{IN1} = 82\text{ dB}\mu$	—	0.05	0.5	V
FM consumption current	fmI _T	Without input	26	35	44	mA


Note) FM tuning condition: Adjust V_{FTU} voltage so that V_{FOSC} output frequency becomes $108.7\text{ MHz} \pm 10\text{ kHz}$.

■ Technical Information

- $P_D - T_a$ curves of LQFP032-P-0707

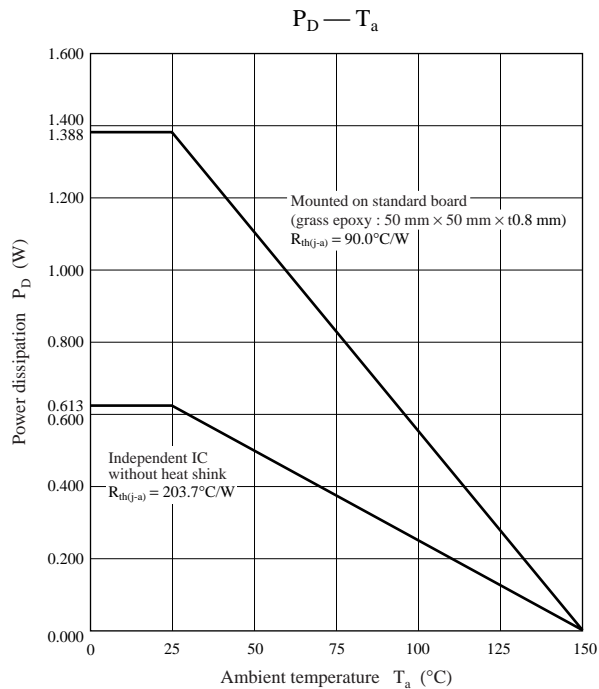

■ Application Circuit Example

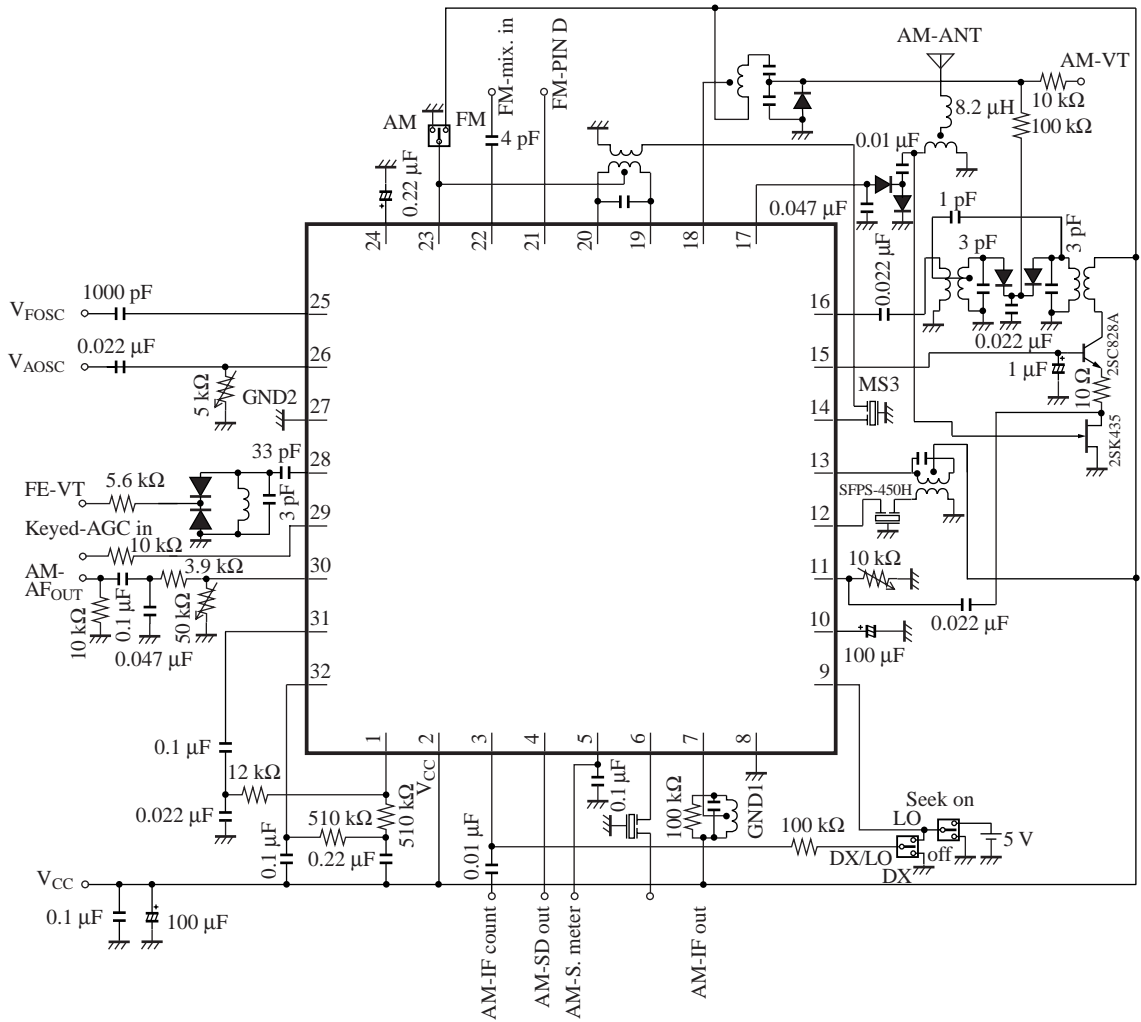



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.