

AN3358SH


2-head recording and playback amplifier IC for 8 mm video camera

■ Overview

The AN3358SH is a recording and playback amplifier IC for 8 mm video camera of 2-head large diameter cylinder, and encapsulated in a small SO package of 24 pins and 0.5 mm pitch.

■ Features


- 2-channel playback head amp
- 2-channel recording amp (collector open type with a single pin output)
- RF-AGC
- Pulse generator for drop out compensation (DOC)
- Supply voltage: 5 V ± 0.5 V
- Small SO package of 0.5 mm pitch (SSOP-24D)

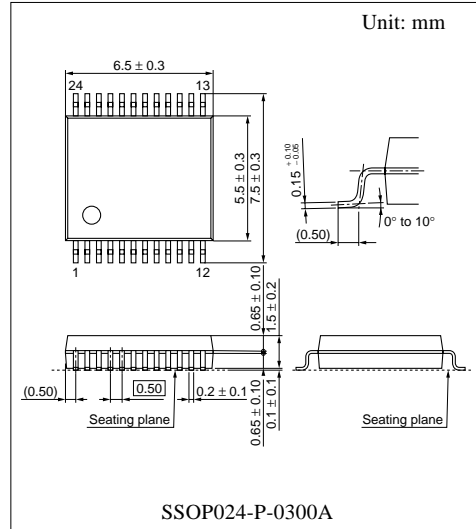

■ Applications

- 8 mm video camera

■ Block Diagram

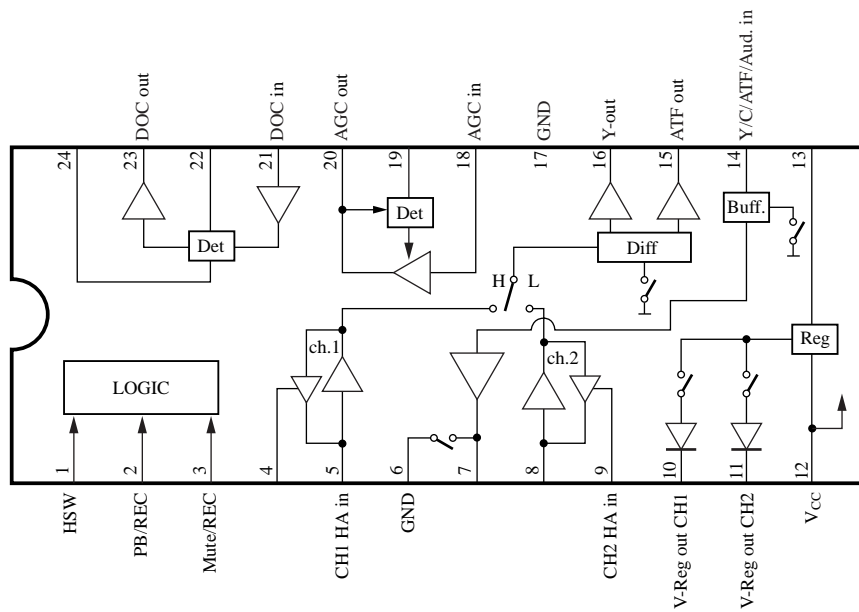

■ Pin Descriptions

Pin No.	Description	Pin No.	Description
1	HSW changeover pin	13	Capacitor pin for V-Reg.
2	PB/REC changeover pin	14	REC curr. amp. input pin
3	Mute/REC changeover pin	15	ATF output pin
4	ch.1 head amp. damping pin	16	Y-output pin
5	ch.1 head amp. input pin	17	Main GND
6	Small signal GND	18	AGC input pin
7	REC curr. amp. output pin	19	AGC det pin
8	ch.2 head amp. input pin	20	AGC output pin
9	ch.2 head amp. damping pin	21	DOC input pin
10	V-reg out.ch.2 pin	22	DOC det pin
11	V-reg out.ch.1 pin	23	DOC output pin
12	Main V_{CC}	24	DOC level control pin

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	6	V
Supply current	I_{CC}	—	mA
Power dissipation *2	P_D	201	mW
Operating ambient temperature*1	T_{opr}	-20 to +70	°C
Storage temperature*1	T_{stg}	-55 to +125	°C

Note) *1: Except for the operating ambient temperature and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

*2: The power dissipation shown is for the IC package in free air at $T_a = 70^\circ\text{C}$.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V_{CC}	4.5 to 5.5	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
REC circuit current	I_{12REC}	$V_{CC} = 5\text{ V}$	29	(41)	53	mA
Recording current output	I_7	$V_{CC} = 5\text{ V}, V_{IN} = 200\text{ mV[p-p]},$ $f = 5\text{ MHz}$	31	(44)	57	mA[p-p]
PB/REC REC mode hold voltage	V_{2REC}	$V_{CC} = 5\text{ V}$, pin 2 potential measurement	0	—	1.5	V
Mute/REC REC mode hold voltage	V_{3REC}	$V_{CC} = 5\text{ V}$, pin 3 potential measurement	0	—	1.5	V
Mute/REC Mute mode hold voltage	V_{3Mute}	$V_{CC} = 5\text{ V}$, pin 3 potential measurement	3.5	—	5	V
PB circuit current	I_{12PB}	$V_{CC} = 5\text{ V}$	12	(17)	22	mA

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
HSW DC unbalance	HSW	$V_{CC} = 5\text{ V}$	—	—	100	mV[p-p]
ch.1 gain	G_{5-16}	$V_{CC} = 5\text{ V}$, pin 5 input: $V_{IN} = 0.3\text{ mV[p-p]}$ $f = 5\text{ MHz}$	60	(64)	68	dB
ch.2 gain	G_{8-16}	$V_{CC} = 5\text{ V}$, pin 8 input: $V_{IN} = 0.3\text{ mV[p-p]}$ $f = 5\text{ MHz}$	60	(64)	68	dB
Y-output/ATF output gain ratio	G_{5-16} $-G_{5-15}$	$V_{CC} = 5\text{ V}$, pin 5 input: $V_{IN} = 0.3\text{ mV[p-p]}$ $f = 5\text{ MHz}$	-2	(0)	2	dB
Input-referred noise ch.1	N_{5-16}/G_{5-16}	$V_{CC} = 5\text{ V}$, 1 MHz BPF output is divided by gain	—	—	1	$\mu\text{V[rms]}$
Input-referred noise ch.2	N_{8-16}/G_{8-16}	$V_{CC} = 5\text{ V}$, 1 MHz BPF output is divided by gain	—	—	1	$\mu\text{V[rms]}$
ATF output DC voltage	V_{15}	$V_{CC} = 5\text{ V}$	1.9	(2.3)	2.7	V
Y-output DC voltage	V_{16}	$V_{CC} = 5\text{ V}$	1.9	(2.3)	2.7	V
PB/REC PB mode hold voltage	V_{2PB}	$V_{CC} = 5\text{ V}$, pin 2 potential measurement	3.5	—	5	V
HSW high-level hold voltage	V_{1H}	$V_{CC} = 5\text{ V}$, pin 1 potential measurement	3.5	—	5	V
HSW low-level hold voltage	V_{1L}	$V_{CC} = 5\text{ V}$, pin1 potential measurement	0	—	1.5	V
AGC output amplitude	V_{18-20}	$V_{CC} = 5\text{ V}$, $V_{IN} = 500\text{ mV[p-p]}$, $f = 5\text{ MHz}$	280	(400)	520	mV[p-p]
AGC sensitivity	ΔV_{18-20}	$V_{CC} = 5\text{ V}$, $f = 5\text{ MHz}$ $V_{IN} = 500\text{ mV[p-p]} \pm 6\text{ dB}$	—	—	3	dB
AGC output DC voltage	V_{20}	$V_{CC} = 5\text{ V}$	2.05	(2.45)	2.85	V
Drop-out detection on level	V_{21ON}	$V_{CC} = 5\text{ V}$, $f = 5\text{ MHz}$, $V_{IN} = 400\text{ mV[p-p]} \rightarrow 0$	-16.0	(-12.5)	-10.5	dB
Drop-out detection off level	V_{21OFF}	$V_{CC} = 5\text{ V}$, $f = 5\text{ MHz}$, $V_{IN} = 0 \rightarrow 400\text{ mV[p-p]}$	-9.5	(-7.5)	-5.5	dB
Drop-out pulse low-level	V_{23L}	$V_{CC} = 5\text{ V}$, $V_{IN} = 400\text{ mV[p-p]}$, $f = 5\text{ MHz}$	—	(0)	0.5	V
Drop-out pulse high-level	V_{23H}	$V_{CC} = 5\text{ V}$	2.8	(3.2)	3.6	V
Recording current secondary harmonic distortion *	D_{2f}	$V_{CC} = 5\text{ V}$, $V_{IN} = 200\text{ mV[p-p]}$, $f = 5\text{ MHz}$	—	-45	—	dB
Recording current frequency characteristics ratio *	I_{7H}/I_Z	$V_{CC} = 5\text{ V}$, $f = 10\text{ MHz}$, 5 MHz $V_{IN} = 200\text{ mV[p-p]}$	—	0	—	dB
PB frequency characteristics ratio*	V_{16H}/V_{16}	$V_{CC} = 5\text{ V}$, $f = 10\text{ MHz}$, 5 MHz $V_{IN} = 0.3\text{ mV[p-p]}$	—	-3	—	dB

Note) The standard values in the parenthesis are the typical values and not the guaranteed ones.

■ Terminal Equivalent Circuits

Pin No.	Equivalent Circuit	Description	Pin Voltage	Remark
1		HSW changeover pin	High: ch.1 output (Pin 5 input) Low: ch.2 output (Pin 8 input)	Set the outputting channel by pin 1. Ch.1 is outputted at open.
2		PB/REC changeover pin	High: PB Low: REC (or mute)	PB and REC modes are changed by pin 2. PB mode at open. Select mute or REC by pin 3.
3		Mute/REC changeover pin	High: mute Low: REC	Select mute or REC by pin 3. Mute mode at open.
4		ch.1 head amp. damping pin	REC — 2.1 V Mute — 1.4 V PB — 1.4 V	—
5		ch.1 head amp. input pin	REC — GND Mute — 0.7 V PB — 0.7 V	—

■ Terminal Equivalent Circuits (continued)

Pin No.	Equivalent Circuit	Description	Pin Voltage	Remark
6	—	Small signal GND	—	—
7		REC curr. amp. output pin	REC 4 V Mute — GND PB — GND	—
8		ch.2 head amp. input pin	REC — GND Mute — 0.7 V PB 0.7 V	—
9		ch.2 head amp. damping pin	REC — 2.1 V Mute — 1.4 V PB — 1.4 V	—
10		V-reg out ch.2 pin	REC — 4.2 V Mute — GND PB — GND	—

■ Terminal Equivalent Circuits (continued)

Pin No.	Equivalent Circuit	Description	Pin Voltage	Remark
11		V-reg out ch.1 pin	REC — 4.2 V Mute — GND PB — GND	—
12	—	Main V _{CC}	—	—
13		For V-reg capacitor pin	REC — 4.2 V Mute — 5 V PB — 5 V	—
14		REC curr. amp. input pin	REC 1.6 V Mute 1.6 V PB — GND	—
15		ATF output pin	REC — 4.1 V Mute — 4.1 V PB 2.3 V	—


■ Terminal Equivalent Circuits (continued)

Pin No.	Equivalent Circuit	Description	Pin Voltage	Remark
16		Y-output pin	REC ——— 4.1 V Mute ——— 4.1 V PB 2.3 V	—
17	—	Main GND	—	—
18		AGC input pin	REC ——— 2.4 V Mute ——— 2.4 V PB 3 V	—
19		AGC det. pin	REC ——— 3.2 V Mute ——— 2.9 V PB 2.9 V	—
20		AGC output pin	REC ——— 4.4 V Mute ——— 4.4 V PB 2.45 V	—

■ Terminal Equivalent Circuits (continued)

Pin No.	Equivalent Circuit	Description	Pin Voltage	Remark
21		DOC input pin	—	—
22		DOC det. pin	REC ——— 4.4 V Mute ——— 4.4 V PB 2.4 V	—
23		DOC output pin	REC ——— GND Mute ——— GND PB 3.2 V GND	—
24		DOC level control pin	REC ——— 2.25 V Mute ——— 2.25 V PB ——— 2.25 V	—

■ Application Circuit Example

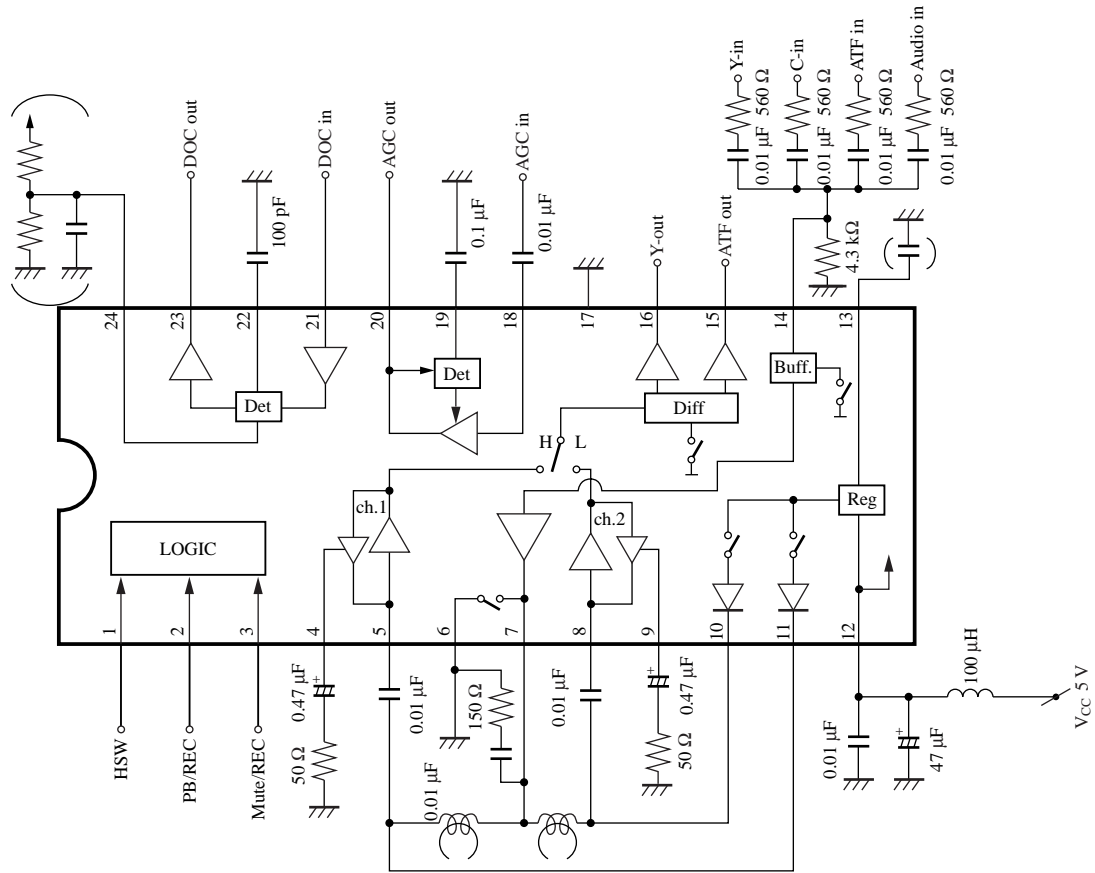



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.