

# MOS FIELD EFFECT POWER TRANSISTORS

## 2SK2134, 2SK2134-Z

### SWITCHING N-CHANNEL POWER MOS FET INDUSTRIAL USE

#### DESCRIPTION

The 2SK2134, 2SK2134-Z are N-channel Power MOS Field Effect Transistors designed for high voltage switching applications.

#### FEATURES

- Low On-state Resistance  
 $R_{DS(on)} = 0.4 \Omega \text{ MAX. (} V_{GS} = 10 \text{ V, } I_D = 7.0 \text{ A)}$
- Low  $C_{iss}$   $C_{iss} = 500 \text{ pF TYP.}$
- High Avalanche Capability Ratings

#### QUALITY GRADE

Standard


Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

#### ABSOLUTE MAXIMUM RATINGS

Drain to Source Voltage	$V_{DS}$	200	V
Gate to Source Voltage	$V_{GS}$	$\pm 30$	V
Drain Current (DC)	$I_{D(DC)}$	$\pm 13$	A
Drain Current (pulse)	$I_{D(pulse)^*}$	$\pm 39$	A
Single Avalanche Current**	$I_{AS}$	13	A
Single Avalanche Energy**	$E_{AS}$	33.8	mJ
Total Power Dissipation ( $T_a = 25^\circ\text{C}$ )	$P_{T1}$	1.5	W
Total Power Dissipation ( $T_c = 25^\circ\text{C}$ )	$P_{T2}$	70	W
Storage Temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$
Channel Temperature	$T_{ch}$	150	$^\circ\text{C}$

\*  $PW \leq 10 \mu\text{s}$ , Duty Cycle  $\leq 1\%$


\*\* Starting  $T_{ch} = 25^\circ\text{C}$ ,  $R_{\theta} = 25 \Omega$ ,  $V_{GS} = 20 \text{ V} \rightarrow 0$

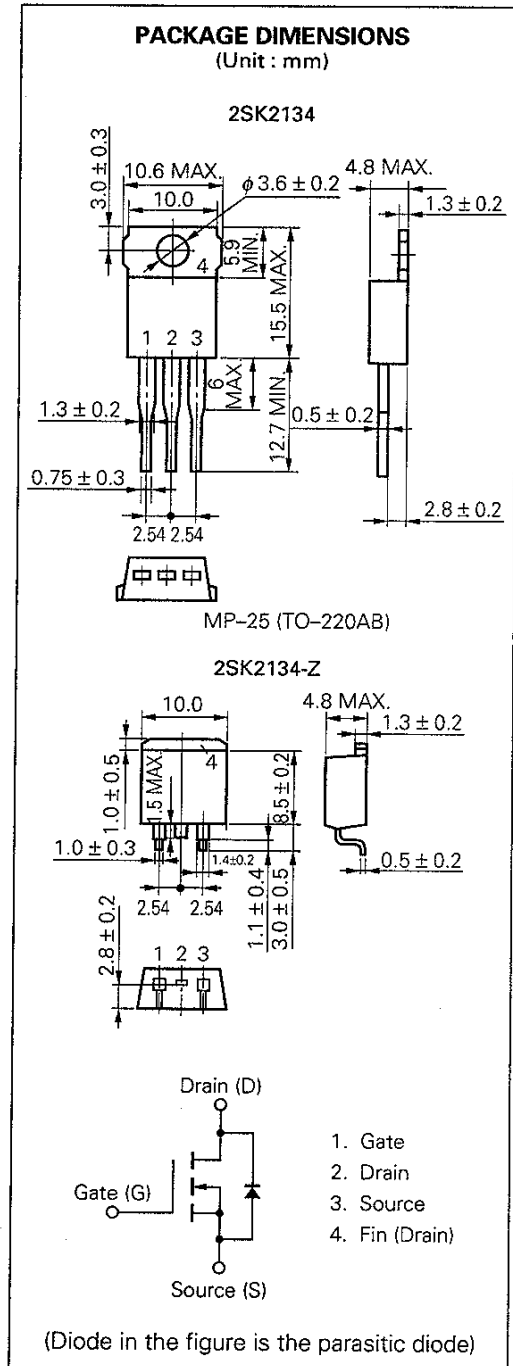


**ELECTRICAL CHARACTERISTICS (T<sub>a</sub> = 25 °C)**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Drain to Source On-state Resistance	R <sub>DS(on)</sub>		0.3	0.4	Ω	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 7.0 A
Gate to Source Cutoff Voltage	V <sub>GS(off)</sub>	2.0		4.0	V	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 1 mA
Forward Transfer Admittance	y <sub>fs</sub>	2.0			S	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 7.0 A
Drain Leakage Current	I <sub>DSS</sub>			100	μA	V <sub>DS</sub> = 200 V, V <sub>GS</sub> = 0
Gate to Source Leakage Current	I <sub>GSS</sub>			±100	nA	V <sub>GS</sub> = ±30 V, V <sub>DS</sub> = 0
Input Capacitance	C <sub>iss</sub>		500		pF	V <sub>DS</sub> = 10 V V <sub>GS</sub> = 0 f = 1 MHz
Output Capacitance	C <sub>oss</sub>		230		pF	
Reverse Transfer Capacitance	C <sub>rss</sub>		60		pF	
Turn-On Delay Time	t <sub>d(on)</sub>		12		ns	V <sub>GS</sub> = 10 V V <sub>DD</sub> = 100 V I <sub>D</sub> = 7.0 A, R <sub>G</sub> = 10 Ω R <sub>L</sub> = 14.3 Ω
Rise Time	t <sub>r</sub>		45		ns	
Turn-Off Delay Time	t <sub>d(off)</sub>		35		ns	
Fall Time	t <sub>f</sub>		12		ns	
Total Gate Charge	Q <sub>G</sub>		15		nC	V <sub>GS</sub> = -10 V I <sub>D</sub> = 13 A V <sub>DD</sub> = 160 V
Gate to Source Charge	Q <sub>GS</sub>		5.0		nC	
Gate to Drain Charge	Q <sub>GD</sub>		8.0		nC	
Diode Forward Voltage	V <sub>F(S-D)</sub>		1.0		V	I <sub>F</sub> = 13 A, V <sub>GS</sub> = 0
Reverse Recovery Time	t <sub>rr</sub>		200		ns	I <sub>F</sub> = 13 A
Reverse Recovery Charge	Q <sub>rr</sub>		0.6		μC	di/dt = 50 A/μs


**Test Circuit 1 : Avalanche Capability**

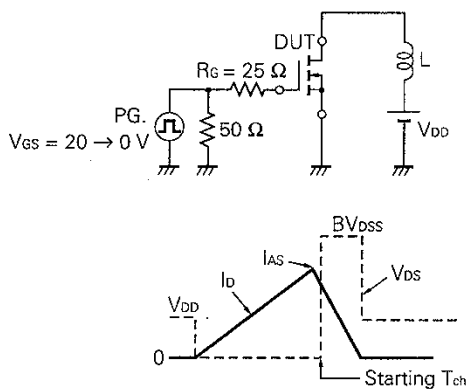

**Test Circuit 2 : Switching Time**

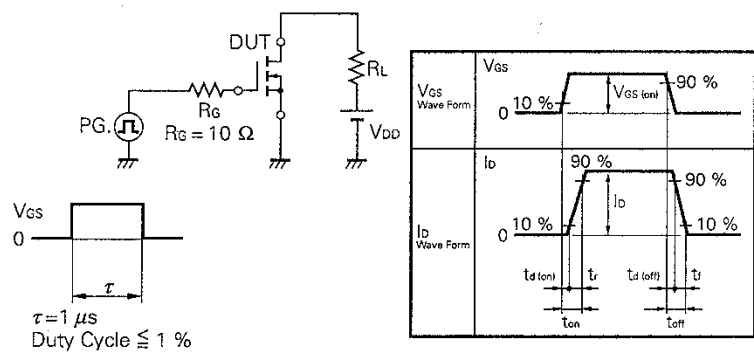

**Test Circuit 3 : Gate Charge**

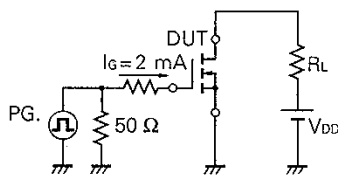



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.