FUJI ELECTRIC

2SK1083-MR

F-III Series

N-channel MOS-FET			
60V	0,22Ω	8A	20W

> Features

- High Current
- Low On-Resistance
- No Secondary Breakdown
- Low Driving Power
- High Forward Transconductance

> Outline Drawing

TO-220F15

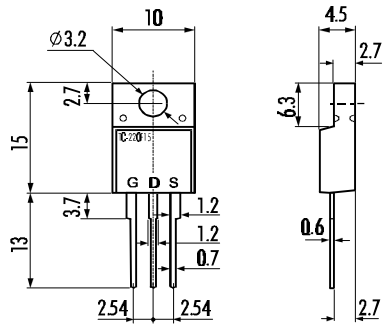

> Applications

- Motor Control
- General Purpose Power Amplifier
- DC-DC converters

> Maximum Ratings and Characteristics

- Absolute Maximum Ratings (T_C=25°C), unless otherwise specified

Item	Symbol	Rating	Unit
Drain-Source-Voltage	V_{DS}	60	V
Continous Drain Current	I_D	8	A
Pulsed Drain Current	$I_{D(puls)}$	32	A
Continous Reverse Drain Current	I_{DR}	8	A
Gate-Source-Voltage	V_{GS}	±20	V
Max. Power Dissipation	P_D	20	W
Operating and Storage Temperature Range	T_{ch}	150	°C
	T_{stg}	-55 ~ +150	°C

> Equivalent Circuit

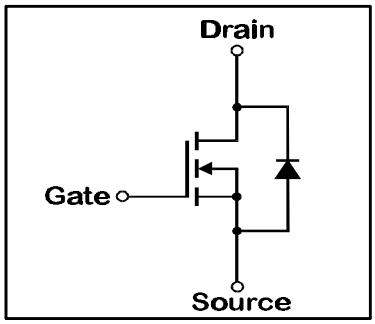

- Electrical Characteristics (T_C=25°C), unless otherwise specified

Item	Symbol	Test conditions		Min.	Typ.	Max.	Unit
Drain-Source Breakdown-Voltage	$V_{(BR)DSS}$	I_D=1mA	V_{GS}=0V	60			V
Gate Threshhold Voltage	$V_{GS(th)}$	I_D=1mA	V_{DS}=V_{GS}	1,0	1,5	2,5	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=60V	T_{ch}=25°C		10	500	µA
		V_{GS}=0V	T_{ch}=125°C		0,2	1,0	mA
Gate Source Leakage Current	I_{GSS}	V_{GS}=±20V	V_{DS}=0V		10	100	nA
Drain Source On-State Resistance	$R_{DS(on)}$	I_D=4A	V_{GS}=4V		0,22	0,35	Ω
		I_D=4A	V_{GS}=10V		0,15	0,22	Ω
Forward Transconductance	g_{fs}	I_D=4A	V_{DS}=25V	3	6		S
Input Capacitance	C_{iss}	V_{DS}=25V			300	450	pF
Output Capacitance	C_{oss}	V_{GS}=0V			110	170	pF
Reverse Transfer Capacitance	C_{rss}	f=1MHz			40	60	pF
Turn-On-Time t_{on} (t_{on}=$t_{d(on)}$+t_r)	$t_{d(on)}$	V_{CC}=30V			7	10	ns
	t_r	I_D=8A			30	45	ns
Turn-Off-Time t_{off} (t_{on}=$t_{d(off)}$+t_f)	$t_{d(off)}$	V_{GS}=10V			50	75	ns
	t_f	R_{GS}=25Ω			20	30	ns
Diode Forward On-Voltage	V_{SD}	I_F=2xI_{DR}	V_{GS}=0V T_{ch}=25°C		1,2	1,8	V
Reverse Recovery Time	t_{rr}	I_F=I_{DR}	V_{GS}=0V		50		ns
		-dI_F/dt=100A/µs	T_{ch}=25°C				

- Thermal Characteristics

Item	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Thermal Resistance	$R_{th(ch-a)}$	channel to air			62,5	°C/W
	$R_{th(ch-c)}$	channel to case			6,25	°C/W

N-channel MOS-FET			
60V	0,22Ω	8A	20W

2SK1083-MR
F-III Series

FUJI ELECTRIC

> Characteristics

Typical Output Characteristics

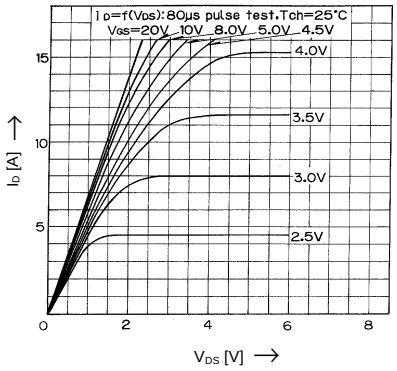

Drain-Source-On-State Resistance vs. T_{ch}

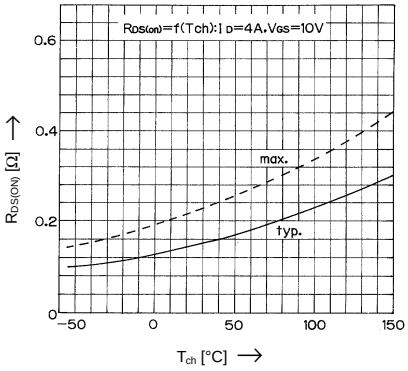

Typical Transfer Characteristics

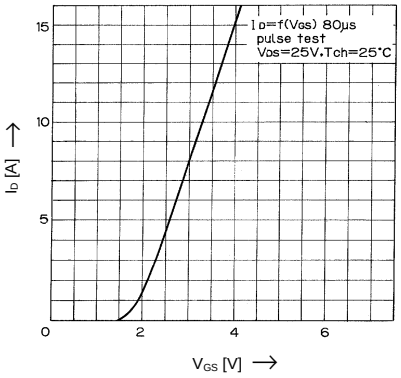

Typical Drain-Source-On-State-Resistance vs. I_D

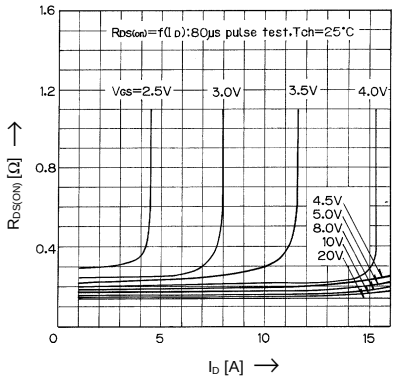

Typical Forward Transconductance vs. I_D

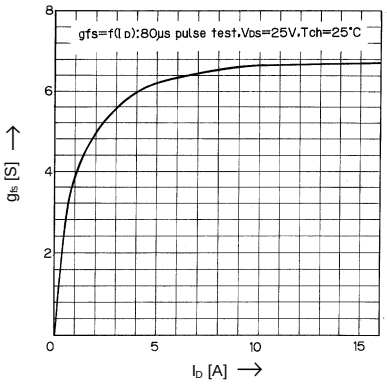

Gate Threshold Voltage vs. T_{ch}

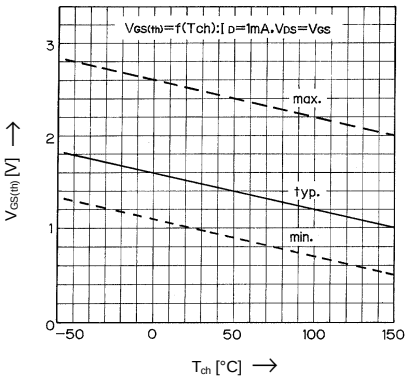

Typical Capacitance vs. V_{DS}

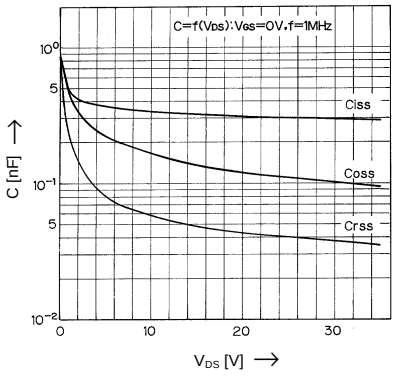

Typical Input Charge

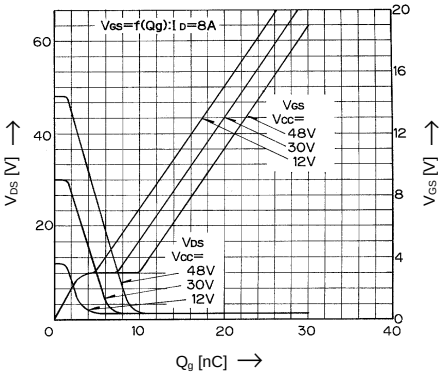

Forward Characteristics of Reverse Diode

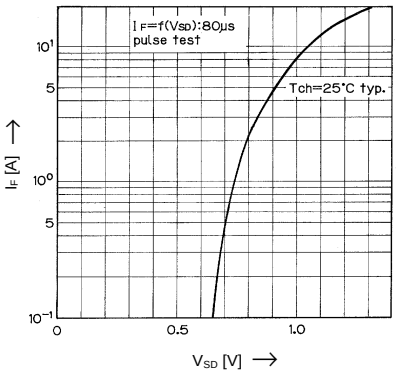

Allowable Power Dissipation vs. T_C

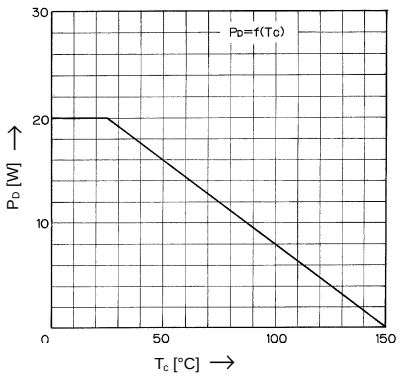

Safe operation area

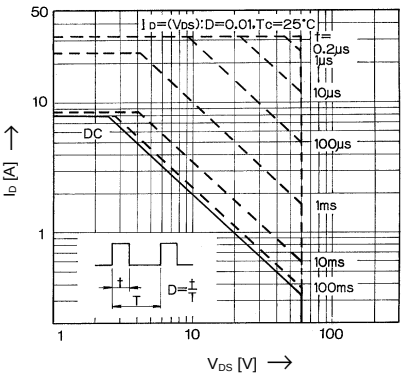

Transient Thermal impedance

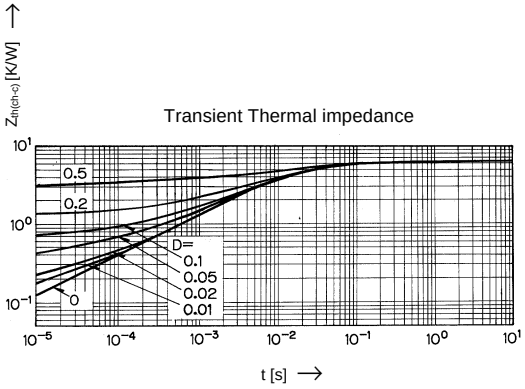

littlediode
COMPONENTS FOR ALL

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.