


AUDIO FREQUENCY HIGH GAIN AMPLIFIER
PNP SILICON EPITAXIAL TRANSISTOR
MINI MOLD

PACKAGE DIMENSIONS

in millimeters

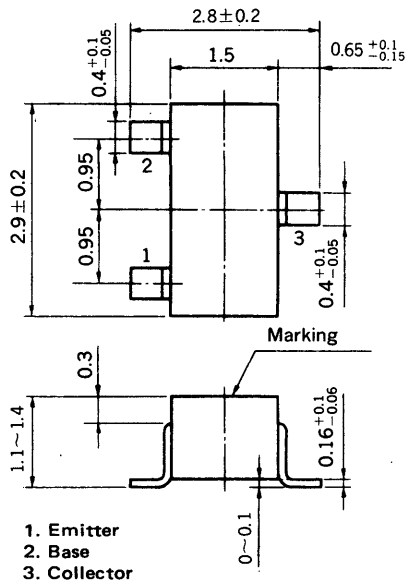

FEATURE

- High DC Current Gain: h_{FE} 500 TYP. ($V_{CE} = -6.0$ V, $I_C = -1.0$ mA)

ABSOLUTE MAXIMUM RATINGS

Maximum Voltages and Current ($T_a = 25^\circ\text{C}$)

Collector to Base Voltage	V_{CB0}	-120	V
Collector to Emitter Voltage	V_{CE0}	-120	V
Emitter to Base Voltage	V_{EB0}	-5.0	V
Collector Current (DC)	I_C	-50	mA

Maximum Power Dissipation

Total Power Dissipation at 25°C Ambient Temperature	P_T	200	mW
---	-------	-----	----

Maximum Temperatures

Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			-50	nA	$V_{CB} = -120$ V, $I_E = 0$
Emitter Cutoff Current	I_{EBO}			-50	nA	$V_{EB} = -5.0$ V, $I_C = 0$
DC Current Gain	h_{FE1}	100	500			$V_{CE} = -6.0$ V, $I_C = -0.1$ mA*
DC Current Gain	h_{FE2}	135	500	900		$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
Collector Saturation Voltage	$V_{CE(sat)}$		-0.09	-0.30	V	$I_C = -10$ mA, $I_B = -1.0$ mA
Base to Emitter Voltage	V_{BE}	-0.55	-0.61	-0.65	V	$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
Gain Bandwidth Product	f_T	50	90		MHz	$V_{CE} = -6.0$ V, $I_E = 1.0$ mA
Output Capacitance	C_{ob}		2.0	3.0	pF	$V_{CB} = -30$ V, $I_E = 0$, $f = 1.0$ MHz



* Pulsed: $PW \leq 350$ μs , Duty Cycle ≤ 2 %

h_{FE2} Classification

Marking	C15	C16	C17	C18
h_{FE2}	135 to 270	200 to 400	300 to 600	450 to 900

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

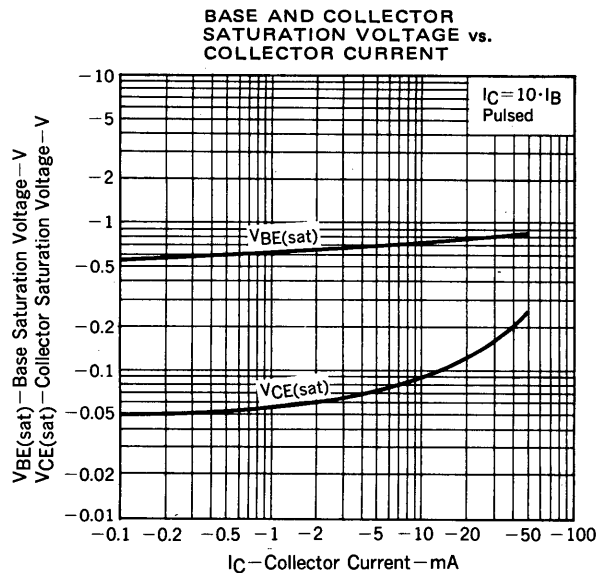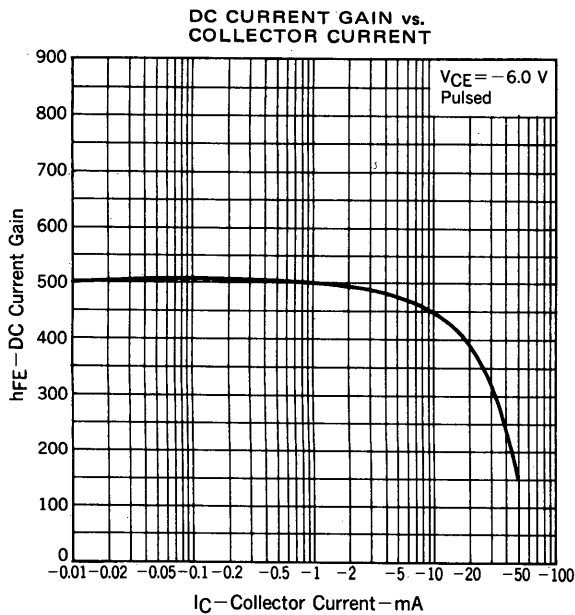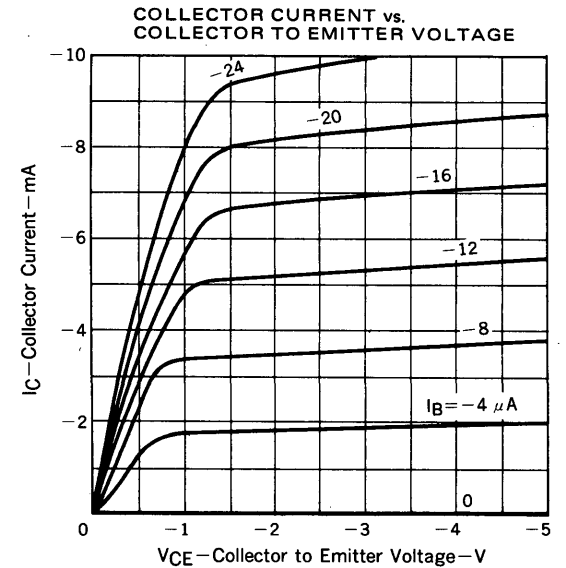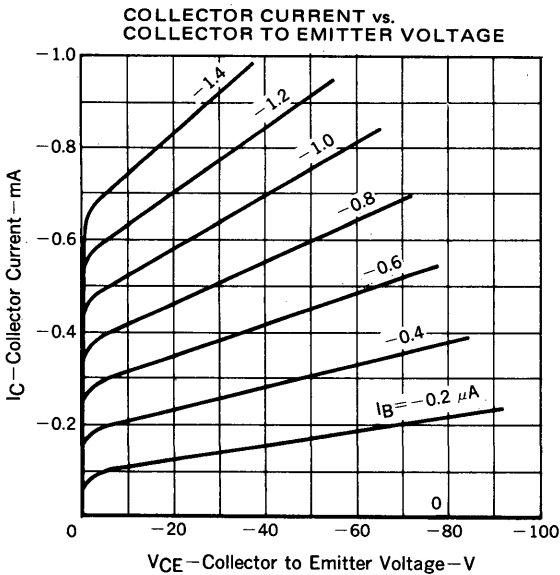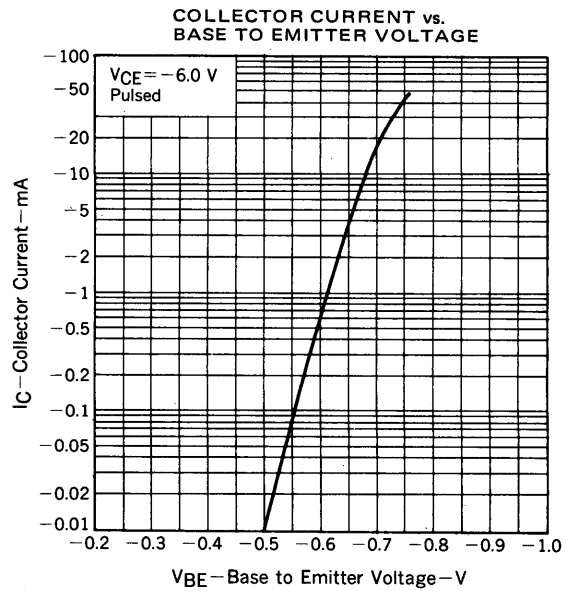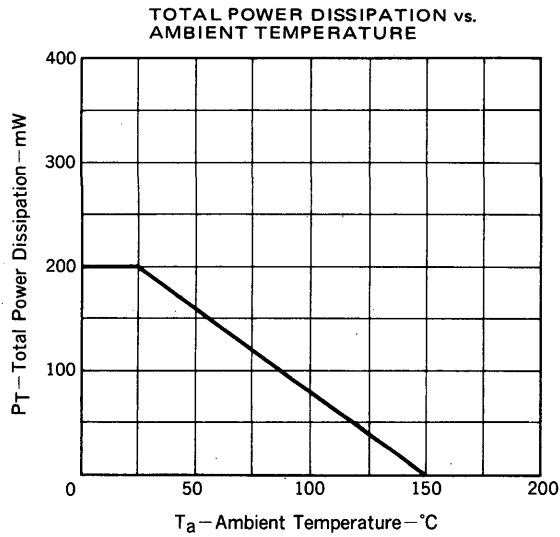

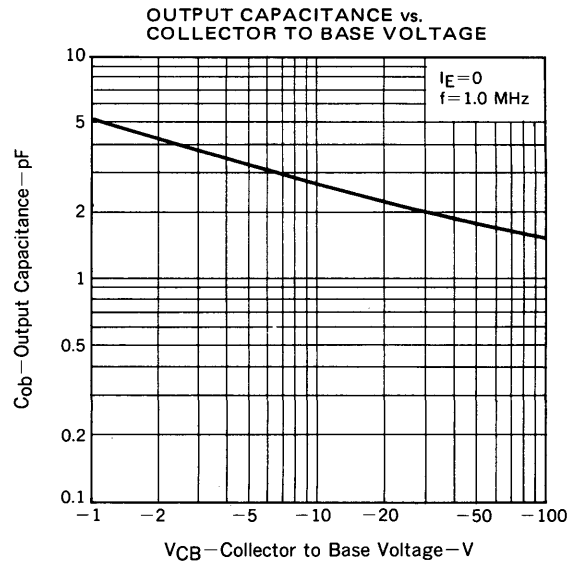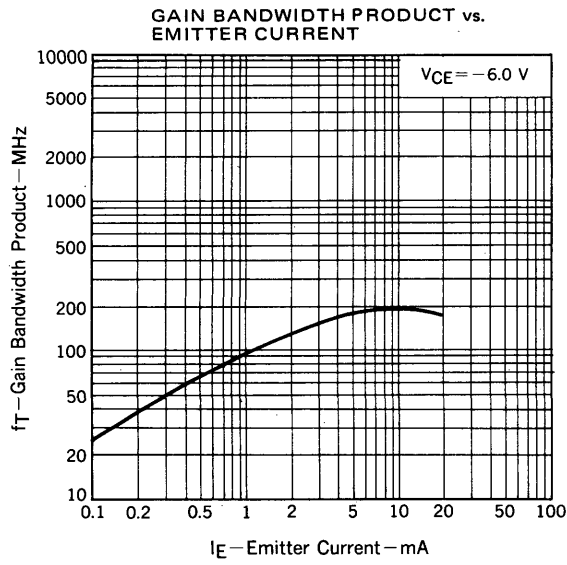

NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.
SUMITOMO MITA Building, 37-8,
Shiba Gochome, Minato-ku, Tokyo 108, Japan
Tel: Tokyo 456-3111
Telex Address: NECTOK J22686
Cable Address: NEC TOKYO

TC-1487A
AUG.-31-84M
Printed in Japan



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.