



MECHANICAL DATA

Dimensions in mm (inches)

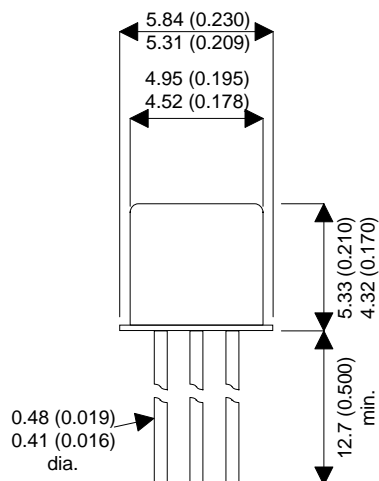

TO-18 METAL PACKAGE

Underside View

PIN 1 – Emitter PIN 2 – Base PIN 3 – Collector

**PNP, LOW NOISE
AMPLIFIER
TRANSISTOR**

FEATURES

- SILICON PLANAR EPITAXIAL PNP TRANSISTOR
- CECC SCREENING OPTIONS
- LOW NOISE AMPLIFIER

APPLICATIONS:

- Low Level Amplifier
- Instrumentation Amplifiers
- General Purpose

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	-60V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	-50V
V_{EBO}	Emitter – Base Voltage ($I_B = 0$)	-5V
I_C	Collector Current	-50mA
P_D	Total Device Dissipation @ $T_A = 25^{\circ}C$	360mW
	Derate above $25^{\circ}C$	2.06mW / $^{\circ}C$
P_D	Total Device Dissipation @ $T_C = 25^{\circ}C$	1.2W
	Derate above $25^{\circ}C$	6.86mW / $^{\circ}C$
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-65 to +200 $^{\circ}C$
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	0.49 $^{\circ}C/mW$
$R_{\theta JC}$	Thermal Resistance Junction to Case	0.15 $^{\circ}C/mW$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter		Test Conditions		Min.	Typ.	Max.	Unit	
$V_{(BR)CEO}$	Collector – Emitter Breakdown Voltage	$I_C = -10\text{mA}$	$I_B = 0$	-60			V	
$V_{(BR)CBO}$	Collector – Base Breakdown Voltage	$I_C = -10\mu\text{A}$	$I_E = 0$	-50				
$V_{(BR)EBO}$	Emitter – Base Breakdown Voltage	$I_E = -10\mu\text{A}$	$I_C = 0$	-5				
I_{CBO}	Collector Cut-off Current	$V_{CB} = -50\text{V}$				-0.01	μA	
		$I_E = 0$	$T_A = 150^\circ\text{C}$			-10		
I_{EBO}	Emitter Cut-off Current	$V_{EB} = -4\text{V}$	$I_C = 0$			-20	nA	
$V_{CE(sat)}$	Collector – Emitter Saturation Voltage	$I_C = -100\mu\text{A}$	$I_B = -10\mu\text{A}$			-0.2	V	
		$I_C = -1\text{mA}$	$I_B = -100\mu\text{A}$			-0.25		
$V_{BE(sat)}$	Base – Emitter Saturation Voltage	$I_C = -100\mu\text{A}$	$I_B = -10\mu\text{A}$			-0.7	V	
		$I_C = -1\text{mA}$	$I_B = -100\mu\text{A}$			-0.8		
$V_{BE(on)}$	Base – Emitter On Voltage	$I_C = -100\mu\text{A}$	$V_{CE} = -5\text{V}$			-0.7	V	
h_{FE}	DC Current Gain	$(V_{CE} = -5\text{V})$		$I_C = -1\mu\text{A}$			75	—
				$I_C = -10\mu\text{A}$			225	
				$I_C = -100\mu\text{A}$			300	
				$I_C = -100\mu\text{A}$	$T_A = -55^\circ\text{C}$		150	
				$I_C = -500\mu\text{A}$			300	
				$I_C = -1\text{mA}$			300	
				$I_C = -10\text{mA}^*$			250	

* Pulse Test: $t_p \leq 300\mu\text{s}$, $\delta \leq 2\%$.

SMALL SIGNAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter		Test Conditions			Min.	Typ.	Max.	Unit		
f_t	Current Gain Bandwidth Product ¹	$V_{CE} = -5\text{V}$	$I_C = -500\mu\text{A}$	$f = 20\text{MHz}$	30			MHz		
		$V_{CE} = -5\text{V}$	$I_C = -1\text{mA}$	$f = 100\text{MHz}$	100		500			
C_{ob}	Output Capacitance	$V_{CB} = -5\text{V}$	$I_E = 0$	$f = 1\text{MHz}$			4	pF		
C_{ib}	Input Capacitance	$V_{EB} = -0.5\text{V}$	$I_C = 0$	$f = 1\text{MHz}$			8			
h_{ie}	Input Impedance	$V_{CE} = -10\text{V}$ $I_C = -1\text{mA}$ $f = 1\text{kHz}$			10		40	$\text{k}\Omega$		
h_{oe}	Output Admittance				5		60	μhos		
h_{re}	Voltage Feedback Ratio								25	$\times 10^{-4}$
h_{fe}	Small Signal Current Gain				300				900	—
N_F	Noise Figure	$V_{CE} = -10\text{V}$ $I_C = -100\mu\text{A}$ $R_G = 3\text{k}\Omega$		$f = 100\text{Hz}$	B.W. = 20Hz		2.5	4	dB	
				Spot:	$f = 1\text{kHz}$			0.8		1.5
					B.W. = 200Hz					
				Noise:	$f = 10\text{kHz}$					1.8
B.W. = 2kHz										
				$f = 1\text{kHz}$					1.5	2.5

1) f_t is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.