


HIGH VOLTAGE, MEDIUM POWER, NPN DUAL TRANSISTOR IN A HERMETICALLY SEALED CERAMIC SURFACE MOUNT PACKAGE FOR HIGH RELIABILITY APPLICATIONS

MECHANICAL DATA
Dimensions in mm (inches)

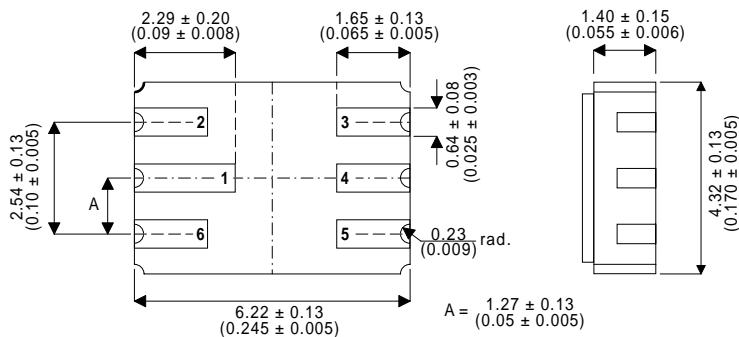

LCC2 PACKAGE
Underside View

- PAD 1 – Collector 1 PAD 4 – Collector 2
- PAD 2 – Base 1 PAD 5 – Emitter 2
- PAD 3 – Base 2 PAD 6 – Emitter 1

FEATURES

- DUAL SILICON PLANAR EPITAXIAL NPN TRANSISTOR
- HERMETIC CERAMIC SURFACE MOUNT PACKAGE
- CECC SCREENING OPTIONS
- SPACE QUALITY LEVELS OPTIONS
- HIGH VOLTAGE

APPLICATIONS:

Dual Hermetically sealed surface mount version of the popular 2N3700 for high reliability/ space applications requiring small size and low weight devices.

ABSOLUTE MAXIMUM RATINGS

($T_{case} = 25^{\circ}C$ unless otherwise stated)

		2N3700
V_{CBO}	Collector – Base Voltage	140V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	80V
V_{EBO}	Emitter – Base Voltage ($I_B = 0$)	7V
I_C	Collector Current	1A
P_D	Per Device Dissipation	350mW
P_D	Total Device Dissipation	525mW
P_D	Derate above $25^{\circ}C$ (Per Device)	2mW / $^{\circ}C$
	(Total)	3mW/ $^{\circ}C$
R_{ja}	Thermal Resistance Junction to Ambient	240 $^{\circ}C/W$
T_{stg}	Storage Temperature	-65 to 200 $^{\circ}C$

ELECTRICAL CHARACTERISTICS (per Device) ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{CEO(sus)}^*$ Collector – Emitter Sustaining Voltage ($I_B = 0$)	$I_C = 10mA$	80			V
I_{CBO}^* Collector – Base Cut-off Current ($I_E = 0$)	$V_{CB} = 90V$			10	nA
	$V_{CB} = 90V$ $T_{amb} = 150^{\circ}C$			10	μA
I_{EBO}^* Emitter Cut-off Current ($I_C = 0$)	$V_{EB} = 5V$			10	nA
$V_{CE(sat)}^*$ Collector – Emitter Saturation Voltage	$I_C = 150mA$ $I_B = 15mA$			0.2	V
	$I_C = 500mA$ $I_B = 50mA$			0.5	V
$V_{BE(sat)}^*$ Base – Emitter Saturation Voltage	$I_C = 150mA$ $I_B = 15mA$			1.1	V
h_{FE}^* DC Current Gain ($V_{CE} = 10V$)	$I_C = 0.1mA$ $V_{CE} = 10V$	50			-
	$I_C = 10mA$ $V_{CE} = 10V$	90			-
	$I_C = 150mA$ $V_{CE} = 10V$	100		300	-
	$I_C = 500mA$ $V_{CE} = 10V$	50			-
	$I_C = 1A$ $V_{CE} = 10V$	15			-
	$I_C = 150mA$ $V_{CE} = 10V$				-
$V_{(BR)CBO}$ Collector-base Breakdown Voltage ($I_E = 0$)	$I_C = 100\mu A$	140			V
$V_{(BR)EBO}$ Emitter-base Breakdown Voltage ($I_C = 0$)	$I_E = 100\mu A$	7			V

* Pulse test $t_p = 300\mu s$, $\delta \leq 1\%$

DYNAMIC CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
f_T Transition Frequency	$I_C = 50mA$ $V_{CE} = 10V$ $f = 20MHz$	100		200	MHz
h_{fe} Small Signal Current Gain	$I_C = 1mA$ $V_{CE} = 5V$ $f = 1kHz$	80		400	-
C_{EBO} Emitter-base Capacitance	$I_C = 0$ $V_{EB} = 0.5V$ $f = 1MHz$			60	pF
C_{CBO} Collector-base Capacitance	$I_C = 0$ $V_{CB} = 10V$ $f = 1MHz$			12	pF
r_{bb} ${}^1C_{b'c}$ Feedback time constant	$I_C = 10mA$ $V_{CB} = 10V$ $f = 4MHz$	25		400	ps



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.