

PNP SMALL SIGNAL SILICON TRANSISTOR

Qualified per MIL-PRF-19500/291

Devices

2N2906A	2N2907A
2N2906AL	2N2907AL
2N2906AUA	2N2907AUA
2N2906AUB	2N2907AUB


Qualified Level

JAN
JANTX
JANTXV
JANS

MAXIMUM RATINGS

Ratings	Symbol	All Types	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Base Voltage	V_{CBO}	60	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	Vdc
Collector Current	I_C	600	mAdc
Total Power Dissipation	$P_T^{(1)}$	0.4	W
		$P_T^{(2/3)}$	1.8
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^{\circ}C$

- 1) Derate linearly 2.28 mW/ $^{\circ}C$ for $T_A > +25^{\circ}C$.
- 2) Derate linearly 10.3 mW/ $^{\circ}C$ for $T_C > +25^{\circ}C$.
- 3) For UA and UB surface mount case outlines: $P_T = 1.16$ W; derate linearly 6.6mW/ $^{\circ}C$ for $T_C > +25^{\circ}C$.

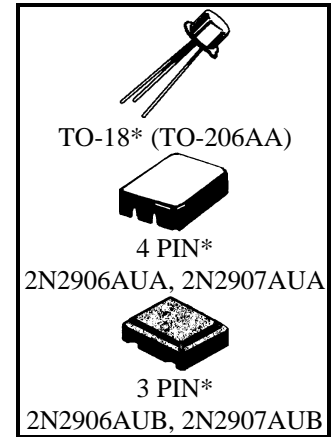

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 10$ mAdc	$V_{(BR)CEO}$	60		Vdc
Collector-Base Cutoff Current $V_{CE} = 50$ Vdc $V_{CE} = 60$ Vdc	I_{CBO}		10 10	μ Adc η Adc
Collector-Base Cutoff Current $V_{CE} = 50$ Vdc	I_{CES}		50	η Adc
Emitter-Base Cutoff Current $V_{EB} = 4.0$ Vdc $V_{EB} = 5.0$ Vdc	I_{EBO}		50 10	η Adc μ Adc

2N2906A, 2N2907A JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS ⁽⁴⁾				
Forward-Current Transfer Ratio $I_C = 0.1 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2906A, UA, UB 2N2907A, UA, UB	h_{FE}	40		
$I_C = 1.0 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2906A, UA, UB 2N2907A, UA, UB		75	175	
$I_C = 10 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2906A, UA, UB 2N2907A, UA, UB		40	450	
$I_C = 150 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2906A, UA, UB 2N2907A, UA, UB		100		
$I_C = 500 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2906A, UA, UB 2N2907A, UA, UB		40	120	
		100	300	
Collector-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{CE(sat)}$		0.4 1.6	Vdc
Base-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{BE(sat)}$	0.6	1.3 2.6	Vdc

DYNAMIC CHARACTERISTICS

Forward Current Transfer Ratio $V_{CE} = 10 \text{ Vdc}, I_C = 1.0 \text{ mAdc}, f = 1.0 \text{ kHz}$ 2N2906A,UA, UB 2N2907A,UA, UB	h_{fe}	40 100		
Magnitude of Small-Signal Forward Current Transfer Ratio $V_{CE} = 20 \text{ Vdc}, I_C = 20 \text{ mAdc}, f = 100 \text{ MHz}$	$ h_{fe} $	2.0		
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		8.0	pF
Input Capacitance $V_{EB} = 2.0 \text{ Vdc}, I_C = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{ibo}		30	pF

SWITCHING CHARACTERISTICS

Turn-On Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = 50 \text{ mAdc}$	t_{on}		45	ηs
Turn-Off Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = -I_{B2} = 50 \text{ mAdc}$	t_{off}		300	ηs

(4) Pulse Test: Pulse Width = 300 μs , Duty Cycle \leq 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.