


**HIGH SPEED, MEDIUM POWER, NPN
SWITCHING TRANSISTOR IN A
HERMETICALLY SEALED
CERAMIC SURFACE MOUNT PACKAGE
FOR HIGH RELIABILITY APPLICATIONS**

MECHANICAL DATA
Dimensions in mm (inches)

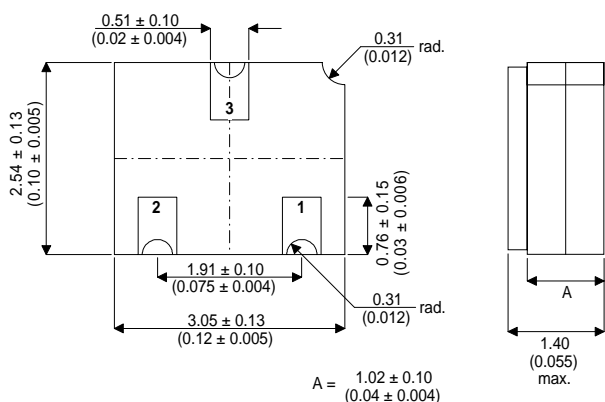

**SOT23 CERAMIC
(LCC1 PACKAGE)**

Underside View

PAD 1 – Base PAD 2 – Emitter PAD 3 – Collector

FEATURES

- SILICON PLANAR EPITAXIAL NPN TRANSISTOR
- HERMETIC CERAMIC SURFACE MOUNT PACKAGE (SOT23 COMPATIBLE)
- CECC SCREENING OPTIONS

APPLICATIONS:

Hermetically sealed surface mount version of the popular 2N2369A for high reliability / space applications requiring small size and low weight devices.

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	40V
V_{CEO}	Collector – Emitter Voltage	15V
V_{EBO}	Emitter – Base Voltage	4.5V
I_C	Collector Current	200mA
P_D	Total Device Dissipation @ $T_A = 25^\circ\text{C}$	360mW
	Derate above 25°C	2.06mW / $^\circ\text{C}$
P_D	Total Device Dissipation @ $T_C = 25^\circ\text{C}$	680mW
	Derate above 25°C	6.85mW / $^\circ\text{C}$
T_{STG}, T_J	Operating and Storage Temperature Range	-65 to +200 $^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CEO^*}$	Collector – Emitter Breakdown Voltage $I_C = 10\text{mA}$	15			V
$V_{(BR)CBO}$	Collector – Base Breakdown Voltage $I_C = 10\mu\text{A}$	40			V
$V_{(BR)EBO}$	Emitter – Base Breakdown Voltage $I_E = 10\mu\text{A}$	4.5			V
I_{CES}	Collector – Emitter Cut-off Current $V_{CE} = 20\text{V}$ $V_{CE} = 10\text{V}$			0.40	μA
				0.30	
		$T_A = +150^\circ\text{C}$		30	
I_{CBO}	Collector – Base Cut-off Current $V_{CB} = 20\text{V}$			0.20	μA
		$T_A = +125^\circ\text{C}$		30	
I_{EBO}	Emitter – Base Cut-off Current $V_{EB} = 4\text{V}$			0.25	μA
$V_{CE(sat)}$	Collector – Emitter Saturation Voltage $I_C = 10\text{mA}$ $I_C = 30\text{mA}$ $I_C = 100\text{mA}$	$I_B = 1\text{mA}$		0.20	V
		$T_A = +150^\circ\text{C}$		0.30	
		$I_B = 3\text{mA}$		0.25	
$V_{BE(sat)}$	Base – Emitter Saturation Voltage $I_C = 10\text{mA}$ $I_B = 1\text{mA}$	$T_A = +25^\circ\text{C}$	0.70	0.85	V
		$T_A = +150^\circ\text{C}$	0.59		
		$T_A = -55^\circ\text{C}$		1.02	
		$I_C = 30\text{mA}$ $I_B = 3\text{mA}$		0.90	
		$I_C = 100\text{mA}$ $I_B = 10\text{mA}$		1.20	
h_{FE^*}	Current Gain $I_C = 10\text{mA}$ $I_C = 30\text{mA}$ $I_C = 10\text{mA}$ $I_C = 100\text{mA}$	$V_{CE} = 0.35\text{V}$	40	120	—
		$V_{CE} = 0.40\text{V}$	30	120	
		$V_{CE} = 1\text{V}$	40	120	
		$T_A = -55^\circ\text{C}$	20		
$ h_{fe} $	Magnitude of h_{fe} $I_C = 10\text{mA}$ $f = 100\text{MHz}$	$V_{CE} = 10\text{V}$	5	10	—
C_{ob}	Output Capacitance $V_{CB} = 5\text{V}$ $I_E = 0$ $f = 100\text{kHz to } 1\text{MHz}$			4	pF
C_{ib}	Input Capacitance $V_{EB} = 0.5\text{V}$ $I_C = 0$ $f = 100\text{kHz to } 1\text{MHz}$			5	
t_s	Storage Time $I_C = 10\text{mA}$ $I_{B1} = -I_{B2} = 10\text{mA}$			13	ns
t_{on}	Turn-On Time $I_C = 10\text{mA}$			12	ns
t_{off}	Turn-Off Time $I_{B1} = 3\text{mA}$ $I_{B2} = -1.5\text{mA}$			18	

* Pulse Test: $t_p \leq 300\mu\text{s}$, $\delta \leq 2\%$.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.