

SILICON CONTROLLED RECTIFIER

Qualified per MIL-PRF-19500/276

Devices

2N2323	2N2324	2N2326	2N2328	
2N2323S	2N2324S	2N2326S	2N2328S	2N2329
2N2323A	2N2324A	2N2326A	2N2328A	2N2329S
2N2323AS	2N2324AS	2N2326AS	2N2328AS	


Qualified
Level

JAN
JANTX
JANTXV

MAXIMUM RATINGS

Ratings	Sym	2N2323,S/ 2N2323A,S	2N2324,S/ 2N2324A,S	2N2326,S/ 2N2326A,S	2N2328,S/ 2N2328A,S	2N2329,S	Unit	
Reverse Voltage	V _{RM}	50	100	200	300	400	Vdc	
Working Peak Reverse Voltage	V _{RM}	75	150	300	400	500	Vpk	
Forward Blocking Voltage	V _{F BXM}	50 ^(3/4)	100 ^(3/4)	200 ^(3/4)	300 ^(3/4)	400 ⁽³⁾	Vpk	
Average Forward Current ⁽¹⁾	I _O	0.22						Adc
Forward Current Surge Peak ⁽²⁾	I _{FSM}	15						Adc
Cathode-Gate Current	V _{KGM}	6						Vpk
Operating Temperature	T _{OP}	-65 to +125						°C
Storage Junction Temp	T _{STG}	-65 to +150						°C

- 1) This average forward current is for an ambient temperature of 80°C and 180 electrical degrees of conduction.
- 2) Surge current is non-recurrent. The rate of rise of peak surge current shall not exceed 40 A during the first 5 μs after switching from the 'off' (blocking) to the 'on' (conducting) state. This is measured from the point where the thyristor voltage has decayed to 90% of its initial blocking value.
- 3) Gate connected to cathode through 1,000 ohm resistor.
- 4) Gate connected to cathode through 2,000 ohm resistor.

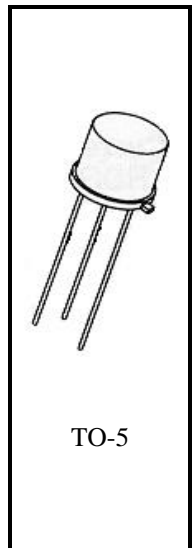

*See appendix A
for package outline

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

SUBGROUP 2 TESTING

Reverse Blocking Current				
R ₂ = 1 kμ	2N2323 thru 2N2329 2N2323S thru 2N2329S			
R ₂ = 2 kμ	2N2323A thru 2N2328A 2N2323AS thru 2N2328AS			
V _R = 50 Vdc	2N2323, S, A, AS		10	μAdc
V _R = 100 Vdc	2N2324, S, A, AS			
V _R = 200 Vdc	2N2326, S, A, AS			
V _R = 300 Vdc	2N2328, S, A, AS			
V _R = 400 Vdc	2N2329, S,			



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.