

GERMANIUM POWER TRANSISTORS

Type Number	Case Type	V_{CBO} V	V_{CEO} V	V_{EBO} V	V_{CER} V	V_{CES} V	CURRENT GAIN				SATURATION VOLTAGES				θ_{J-C} °C/W
							Min.	Max.	$V_{CE} @ I_C$ V	$I_C @ I_B$ A	$V_{CE(s)}$ V	$V_{BE(s)}$ V	$I_C @ I_B$ A	$I_C @ I_B$ A	
15 AMP GERMANIUM PNP (Cont.)															
2N1553A	TO-3	40		20.0		30	30	60	2.0	10.0	.70		10.0	1.000	.80
2N1554	TO-3	60	30	30.0		45	30	60	2.0	10.0	.50		10.0	1.000	.80
2N1554A	TO-3	60		30.0		45	30	60	2.0	10.0	.70		10.0	1.000	.80
2N1555	TO-3	80	40	40.0		60	30	60	2.0	10.0	.50		10.0	1.000	.80
2N1555A	TO-3	80		40.0		60	30	60	2.0	10.0	.70		10.0	1.000	.80
2N1556	TO-3	100	50	50.0		75	30	60	2.0	10.0	.50		10.0	1.000	.80
2N1556A	TO-3	100		50.0		75	30	60	2.0	10.0	.70		10.0	1.000	.80
2N1557	TO-3	40	20	20.0		30	50	100	2.0	10.0	.40		10.0	1.000	.80
2N1557A	TO-3	40		20.0		30	50	100	2.0	10.0	.50		10.0	1.000	.80
2N1558	TO-3	60	30	30.0		45	50	100	2.0	10.0	.40		10.0	1.000	.80
2N1558A	TO-3	60		30.0		45	50	100	2.0	10.0	.50		10.0	1.000	.80
2N1559	TO-3	80	40	40.0		60	50	100	2.0	10.0	.40		10.0	1.000	.80
2N1559A	TO-3	80		40.0		60	50	100	2.0	10.0	.50		10.0	1.000	.80
2N1560	TO-3	100	50	50.0		75	50	100	2.0	10.0	.40		10.0	1.000	.80
2N1560A	TO-3	100		50.0		75	50	100	2.0	10.0	.50		10.0	1.000	.80
2N1970	TO-36	100	50	40.0			17	40	2.0	5.0	1.00		12.0	2.000	.80
2N1980	TO-36	50	30	20.0			50	100	2.0	5.0	.50		5.0	.500	.50
2N1981	TO-36	70	40	20.0			50	100	2.0	5.0	.50		5.0	.500	.50
2N1982	TO-36	90	50	20.0			50	100	2.0	5.0	.50		5.0	.500	.50
2N2075	TO-36	80	60	40.0		80	20	40	2.0	5.0	.70		12.0	2.000	.50
2N2076	TO-36	70	55	35.0		70	20	40	2.0	5.0	.70		12.0	2.000	.50
2N2077	TO-36	50	45	25.0		50	20	40	2.0	5.0	.90		12.0	2.000	.50
2N2078	TO-36	40	25	20.0		40	20	40	2.0	5.0	.90		12.0	2.000	.50
2N2079A	TO-36	80	65	40.0		80	35	70	2.0	5.0	.70		12.0	2.000	.50
2N2080	TO-36	70	55	35.0		70	35	70	2.0	5.0	.70		12.0	2.000	.50
2N2081	TO-36	50	45	25.0		50	35	70	2.0	5.0	.90		12.0	2.000	.50
2N2082	TO-36	40	25	20.0		40	35	70	2.0	5.0	.90		12.0	2.000	.50
2N2612	TO-3	65	30	30.0			85	250	2.0	10.0	1.00		10.0	.150	1.00

15 AMP GERMANIUM PNP TETRODES

3N49	MT-70	60	35				30	120	2.0	5.0	.40		5.0	.500	.80
3N50	MT-70	80	50				20	80	2.0	5.0	.40		5.0	.500	.80
3N51	MT-70	40	25				30	120	2.0	5.0	.40		5.0	.500	.80
3N52	MT-70	60	40				20	80	2.0	5.0	.40		5.0	.500	.80

Type Number	Case Type	$V_{CEO(max)}$ V	V_{EBO} V	h_{FE} @ I_C/V_{CE} (Min-Max @ A/V)	$V_{CE(max)}$ @ I_C/I_B (V@A/A)	V_{BE} @ I_C/V_{CE} (V@A/V)	I_{CEV} @ V_{CE} (mA@V)	$P_D @ T_C = 25^\circ C$ (watts)	θ_{JC} (°C/W)	$T_{J(max)}$ (°C)	f_T (KHz)
-------------	-----------	---------------------	----------------	--	---	---------------------------------------	-----------------------------------	-------------------------------------	-------------------------	----------------------	----------------

15 TO 65 AMP GERMANIUM PNP

2N2490	TO-36	50	40	20-40@5/2	.7@12/2	.9@5/2	3@70	170	0.5	110	
2N2491	TO-36	40	30	35-70@5/2	.7@12/2	.9@5/2	3@60	170	0.5	110	
2N2492	TO-36	65	60	25-50@5/2	.5@12/2	.8@5/2	2@80	170	0.5	110	
2N1518	TO-36	40	30	15-60@15/4	.7@25/4	1.5@25/3	4@50	70	0.8	95	
2N1519	TO-36	60	30	15-60@15/4	.7@25/4	1.5@25/3	4@80	70	0.8	95	

Type Number	Case Type	V_{CBO} V	V_{CEO} V	V_{EBO} V	V_{CER} V	V_{CES} V	Min.	Max.	$V_{CE} @ I_C$ V	$I_C @ I_B$ A	$V_{CE(s)}$ V	$V_{BE(s)}$ V	$I_C @ I_B$ A	$I_C @ I_B$ A	θ_{J-C} °C/W
-------------	-----------	----------------	----------------	----------------	----------------	----------------	------	------	---------------------	------------------	------------------	------------------	------------------	------------------	------------------------


25 AMP GERMANIUM PNP

2N511	TO-41	40	20	30.0		50	20	60	2.0	10.0	.50		10.0	1.000	.50
2N511A	TO-41	60	30	30.0		60	20	60	2.0	10.0	.50		10.0	1.000	.50
2N511B	TO-41	80	40	30.0		65	20	60	2.0	10.0	.50		10.0	1.000	.50
2N512	TO-41	40		30.0		50	20	60	2.0	15.0	1.00		15.0	2.250	.50
2N512A	TO-41	60		30.0		60	20	60	2.0	15.0	1.00		15.0	2.250	.50
2N512B	TO-41	80		30.0		65	20	60	2.0	15.0	1.00		15.0	2.250	.50
2N513	TO-41	40	20	30.0		20	60	60	2.0	20.0	1.25		20.0	3.000	.50
2N513A	TO-41	60	30	30.0		20	60	60	2.0	20.0	1.25		20.0	3.000	.50
2N513B	TO-41	80	40	30.0		20	60	60	2.0	20.0	1.25		20.0	3.000	.50
2N514	TO-41	40	40	30.0		20	60	60	2.0	25.0	1.25		25.0	3.750	.70
2N514A	TO-41	60	50	30.0		20	60	60	2.0	25.0	1.25		25.0	3.750	.70
2N514B	TO-41	80	60	30.0		20	60	60	2.0	25.0	1.25		25.0	3.750	.70
2N575	MT-7	60	50	28.0		10	10	25.0	2.0	25.0	.50		10.0	2.000	.40
2N575A	MT-7	80	55	28.0		10	10	25.0	2.0	25.0	.50		10.0	2.000	.40
2N1162	TO-3	50		25.0		35	15	65	1.0	25.0	.80		25.0	1.600	.80


GERMANIUM POWER TRANSISTORS

CASE OUTLINE DRAWINGS & DIMENSIONS


T0-5

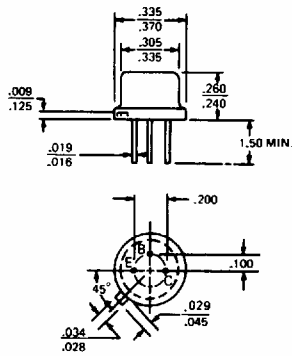


T0-8

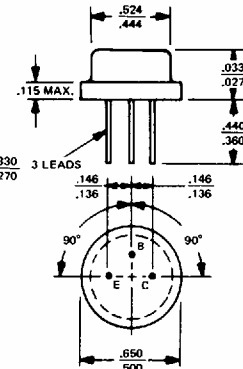


T0-37

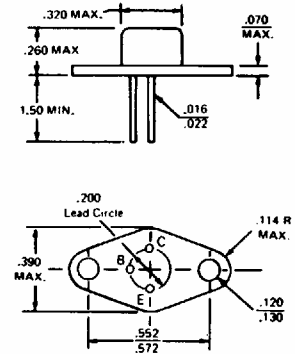


MT-27




MT-28

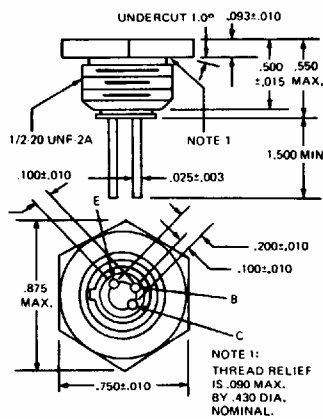


T0-3

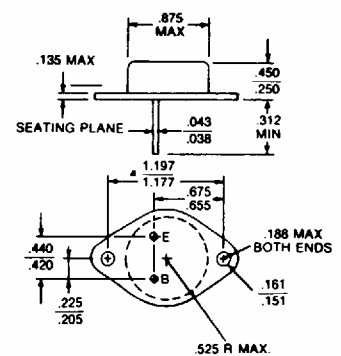


MODIFIED T0-3
(60 mil pins)

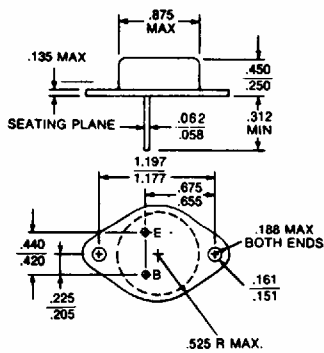

T0-41

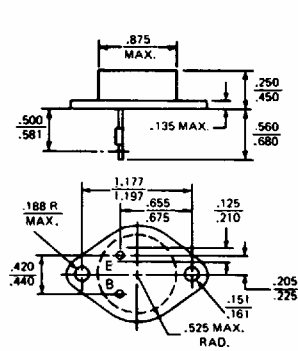


T0-36

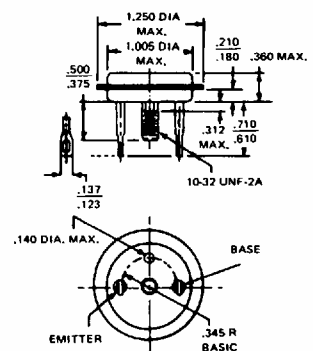


GERMANIUM POWER TRANSISTORS

CASE OUTLINE DRAWINGS & DIMENSIONS


NS257

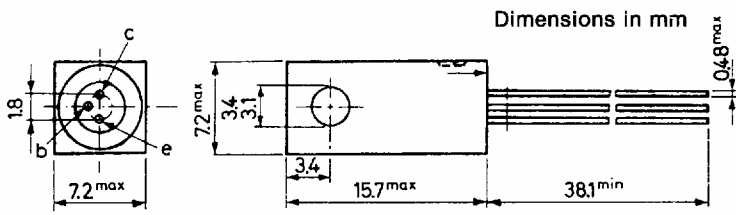

TO-1

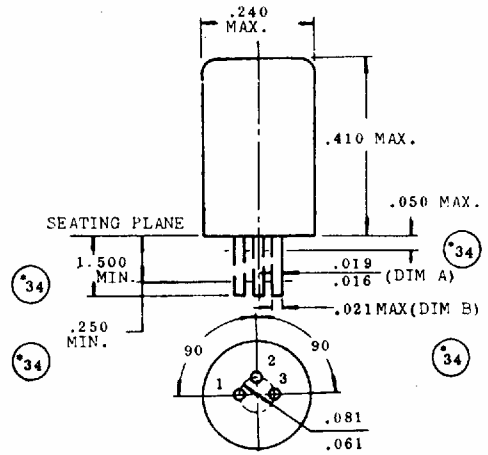

TO-18

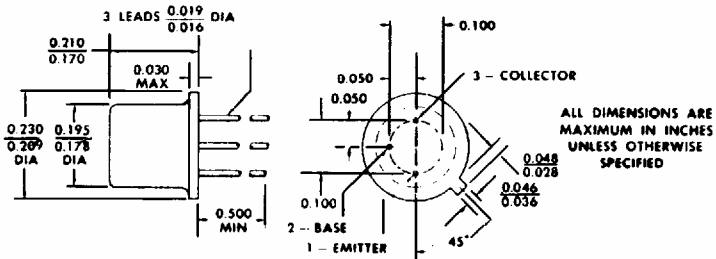

THE COLLECTOR IS ELECTRICAL CONTACT WITH THE CASE.

ALL JEDEC TO-18 DIMENSIONS AND NOTES ARE APPLICABLE.



GERMANIUM POWER DEVICES CORP.

300 Brickstone Square · York Street · P.O. Box 3065
Shawsheen Village Station · Andover, Massachusetts 01810
Telephone (508) 475-5982 · FAX (508) 470-1512

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.