

## NPN LOW POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/181

### Devices

2N718A

2N1613  
2N1613L

### Qualified Level

JAN  
JANTX  
JANTXV

### MAXIMUM RATINGS


Ratings	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	30	Vdc
Collector-Base Voltage	$V_{CBO}$	75	Vdc
Emitter-Base Voltage	$V_{EBO}$	7.0	Vdc
Collector Current	$I_C$	500	mAdc
Total Power Dissipation @ $T_A = +25^{\circ}\text{C}$ <sup>(1)</sup>	2N718A	0.5	W
	2N1613, L	0.8	
	2N718A	1.8	
	2N1613, L	3.0	
@ $T_C = +25^{\circ}\text{C}$ <sup>(2)</sup>			
Operating & Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +175	$^{\circ}\text{C}$

### THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	2N718A	97	$^{\circ}\text{C}/\text{W}$
	2N1613, L	58	

1) Derate linearly 4.57 mW/ $^{\circ}\text{C}$  for 2N1613, L and 2.85 mW/ $^{\circ}\text{C}$  for 2N718A for  $T_A > +25^{\circ}\text{C}$

2) Derate linearly 17.2 mW/ $^{\circ}\text{C}$  for 2N1613, L and 10.3 mW/ $^{\circ}\text{C}$  for 2N718A for  $T_C > +25^{\circ}\text{C}$

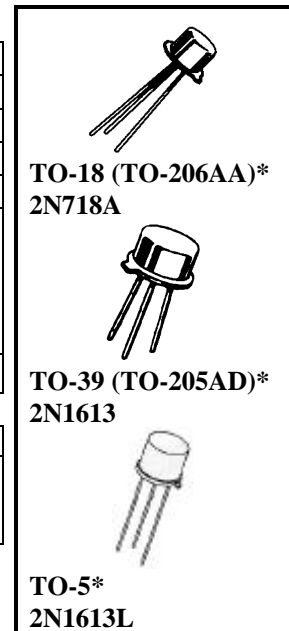

\*See appendix A for package outline

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

### OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 30 \text{ mAdc}$	$V_{(BR)CEO}$	30		Vdc
Collector-Emitter Breakdown Voltage $I_C = 10 \text{ mAdc}, R_{BE} = 10 \Omega$	$V_{(BR)CER}$	50		Vdc
Collector-Base Cutoff Current $V_{CB} = 60 \text{ Vdc}$	$I_{CBO}$		10	$\eta\text{Adc}$
Emitter-Base Cutoff Current $V_{EB} = 5.0 \text{ Vdc}$	$I_{EBO}$		10	$\eta\text{Adc}$

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

**ON CHARACTERISTICS (3)**

Forward-Current Transfer Ratio $I_C = 0.1 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ $I_C = 10 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ $I_C = 150 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ $I_C = 500 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$	$h_{FE}$	20 35 40 20	120	
Collector-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$	$V_{CE(sat)}$		1.5	Vdc
Base-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$	$V_{BE(sat)}$		1.3	Vdc

**DYNAMIC CHARACTERISTICS**

Magnitude of Small-Signal Forward Current Transfer Ratio $I_C = 50 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}, f = 20 \text{ MHz}$	$ h_{fe} $	3.0		
Small-Signal Forward Current Transfer Ratio $I_C = 1.0 \text{ mAdc}, V_{CE} = 5.0 \text{ Vdc}, f = 1.0 \text{ kHz}$ $I_C = 5.0 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$	$h_{fe}$	30 35	100 150	
Small-Signal Short Circuit Input Impedance $I_C = 5.0 \text{ mAdc}, V_{CB} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$	$h_{ib}$	4.0	8.0	$\Omega$
Small-Signal Short Circuit Output Admittance $I_C = 5.0 \text{ mAdc}, V_{CB} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$	$h_{ob}$		1.0	$\eta\Omega$
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	$C_{obo}$		25	pF

**SWITCHING CHARACTERISTICS**

Turn-On Time + Turn-Off Time (See Figure 1 of MIL-PRF-19500/181)	$t_{on} + t_{off}$		30	$\eta s$
---	--------------------	--	----	----------

(3)Pulse Test: Pulse Width = 300 $\mu s$ , Duty Cycle  $\leq 2.0\%$ .



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.