

TOSHIBA TRANSISTOR SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

2SC752[®]TM

ULTRA HIGH SPEED SWITCHING APPLICATIONS


COMPUTER, COUNTER APPLICATIONS

- High Transition Frequency : $f_T=400\text{MHz}$ (Typ.)
- Low Saturation Voltage : $V_{CE(sat)}=0.3\text{V}$ (Max.)
- High Speed Switching Time : $t_{stg}=15\text{ns}$ (Typ.)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	40	V
Collector-Emitter Voltage	V_{CEO}	15	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	200	mA
Base Current	I_B	40	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~125	$^\circ\text{C}$

Unit in mm

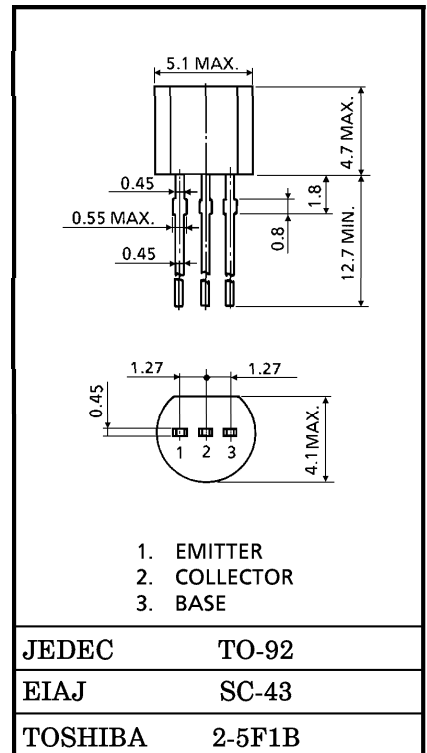

Weight : 0.21g

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		ICBO	V _{CB} = 40V, I _E = 0	—	—	0.1	μA
Emitter Cut-off Current		IEBO	V _{EB} = 5V, I _C = 0	—	—	0.1	μA
DC Current Gain		h _{FE} (1) (Note)	V _{CE} = 1V, I _C = 10mA	40	—	240	
		h _{FE} (2)	V _{CE} = 1V, I _C = 100mA	20	—	—	
Collector-Emitter Saturation Voltage		V _{CE} (sat)	I _C = 20mA, I _B = 1mA	—	—	0.3	V
Base-Emitter Saturation Voltage		V _{BE} (sat)	I _C = 20mA, I _B = 1mA	—	—	1.0	V
Transition Frequency		f _T	V _{CE} = 10V, I _C = 10mA	200	400	—	MHz
Collector Output Capacitance		C _{ob}	V _{CB} = 10V, I _E = 0, f = 1MHz	—	4	6	pF
Switching Time	Turn-on Time	t _{on}	<p>DUTY CYCLE ≤ 2%</p>	—	70	100	ns
	Storage Time	t _{stg}		—	15	30	
	Fall Time	t _f		—	30	70	

(Note) : h_{FE} Classification R : 40~80, O : 70~140, Y : 120~240

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.