

SOT223 NPN SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR

FZT688B

ISSUE 3 - OCTOBER 1995

FEATURES


- * Extremely low equivalent on resistance; $R_{CE(sat)}$ **83mΩ at 3A**
- * Gain of 400 at $I_C=3$ Amps and very low saturation voltage

APPLICATIONS

- * Flash gun convertors & Battery powered circuits

PARTMARKING DETAIL - FZT688B

COMPLEMENTARY TYPE - FZT788B

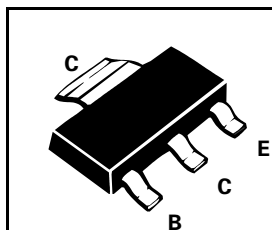

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	12	V
Collector-Emitter Voltage	V_{CEO}	12	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	10	A
Continuous Collector Current	I_C	4	A
Power Dissipation at $T_{amb}=25^\circ\text{C}$	P_{tot}	2	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Breakdown Voltages	$V_{(BR)CBO}$	12			V	$I_C=100\mu\text{A}$
	$V_{(BR)CEO}$	12			V	$I_C=10\text{mA}^*$
	$V_{(BR)EBO}$	5			V	$I_E=100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			0.1	μA	$V_{CB}=10\text{V}$
Emitter Cut-Off Current	I_{EBO}			0.1	μA	$V_{EB}=4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			0.04	V	$I_C=0.1\text{A}, I_B=1\text{mA}$
				0.06	V	$I_C=0.1\text{A}, I_B=0.5\text{mA}^*$
				0.18	V	$I_C=1\text{A}, I_B=50\text{mA}^*$
				0.35	V	$I_C=3\text{A}, I_B=20\text{mA}^*$
				0.40	V	$I_C=4\text{A}, I_B=50\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			1.1	V	$I_C=3\text{A}, I_B=20\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$			1.0	V	$I_C=3\text{A}, V_{CE}=2\text{V}$
Static Forward Current Transfer Ratio	h_{FE}	500				$I_C=0.1\text{A}, V_{CE}=2\text{V}^*$
		400				$I_C=3\text{A}, V_{CE}=2\text{V}^*$
		100				$I_C=10\text{A}, V_{CE}=2\text{V}^*$
Transition Frequency	f_T	150			MHz	$I_C=50\text{mA}, V_{CE}=5\text{V}$ $f=50\text{MHz}$
Input Capacitance	C_{ibo}		200		pF	$V_{EB}=0.5\text{V}, f=1\text{MHz}$
Output Capacitance	C_{obo}		40		pF	$V_{CB}=10\text{V}, f=1\text{MHz}$
Switching Times	t_{on} t_{off}		40		ns	$I_C=500\text{mA}, I_{B1}=50\text{A}$
			500		ns	$I_{B2}=50\text{mA}, V_{CC}=10\text{V}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device

FZT688B

TYPICAL CHARACTERISTICS

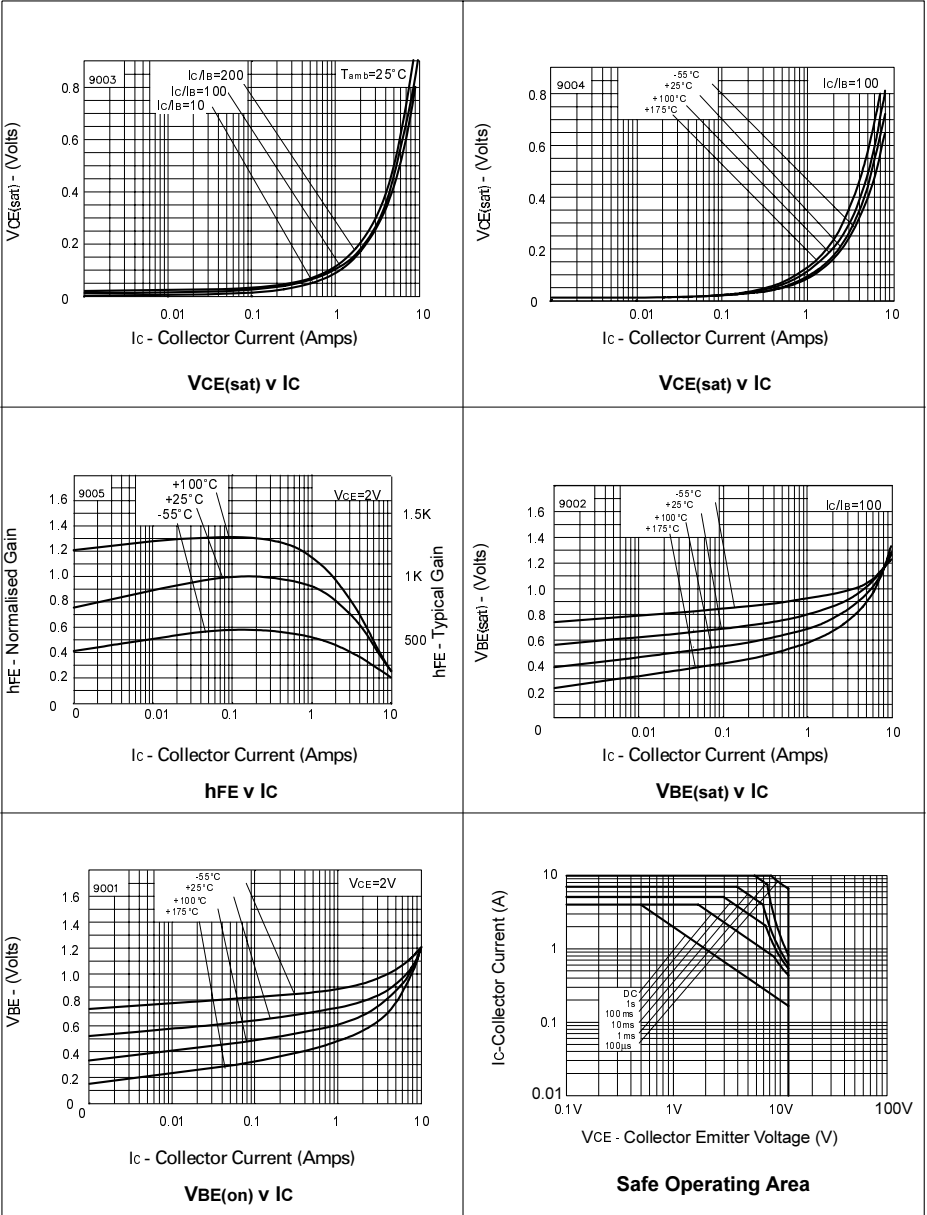



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.