




79L05


Negative-Voltage Regulators

- 3-Terminal Regulators
- Output Current Up to 100 mA
- No External Components Required
- Internal Thermal-Overload Protection
- Internal Short-Circuit Current Limiting
- Direct Replacement for Motorola MC79L00 Series



TO-92

79L05ACZ



SOT-89

79L05CPK

COMMON INPUT OUTPUT

description

This series of fixed negative-voltage integrated-circuit voltage regulators is designed for a wide range of applications. These include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used to control series pass elements to make high-current voltage-regulator circuits. One of these regulators can deliver up to 100 mA of output current. The internal current-limiting and thermal-shutdown features make them essentially immune to overload. When used as a replacement for a zener-diode and resistor combination, these devices can provide effective improvement in output impedance of two orders of magnitude, with lower bias current.


electrical characteristics at specified virtual junction temperature, $V_I = -10\text{ V}$, $I_O = 40\text{ mA}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T ‡	79L05			UNIT
			MIN	TYP	MAX	
Output voltage		25°C	-4.8	-5	-5.2	V
	$I_O = 1\text{ mA to }40\text{ mA}$, $V_I = -7\text{ V to }-20\text{ V}$	Full range	-4.75		-5.25	
		Full range	-4.75		-5.25	
Input voltage regulation	$V_I = -7\text{ V to }-20\text{ V}$	25°C		15	150	mV
	$V_I = -8\text{ V to }-20\text{ V}$				100	
Ripple rejection	$V_I = -8\text{ V to }-18\text{ V}$ $f = 120\text{ Hz}$	25°C	41	49		dB
Output voltage regulation	$I_O = 1\text{ mA to }100\text{ mA}$	25°C		20	60	mV
	$I_O = 1\text{ mA to }40\text{ mA}$			10	30	
Output noise voltage	$f = 10\text{ Hz to }100\text{ kHz}$	25°C		40		µV
Dropout voltage		25°C		1.7		V
Bias current		25°C			6	mA
		125°C			5.5	
Bias current change	$V_I = -8\text{ V to }-20\text{ V}$ $I_O = 1\text{ mA to }40\text{ mA}$	Full range			1.5	mA
					0.1	

‡ Pulse-testing techniques maintain T_J as close to T_A as possible. Thermal effects must be taken into account separately. All characteristics are measured with a 0.33-µF capacitor across the input and a 0.1-µF capacitor across the output. Full range for the 79L05 is $T_J = 0^\circ\text{C to }70^\circ\text{C}$

WS 79L05

equivalent schematic

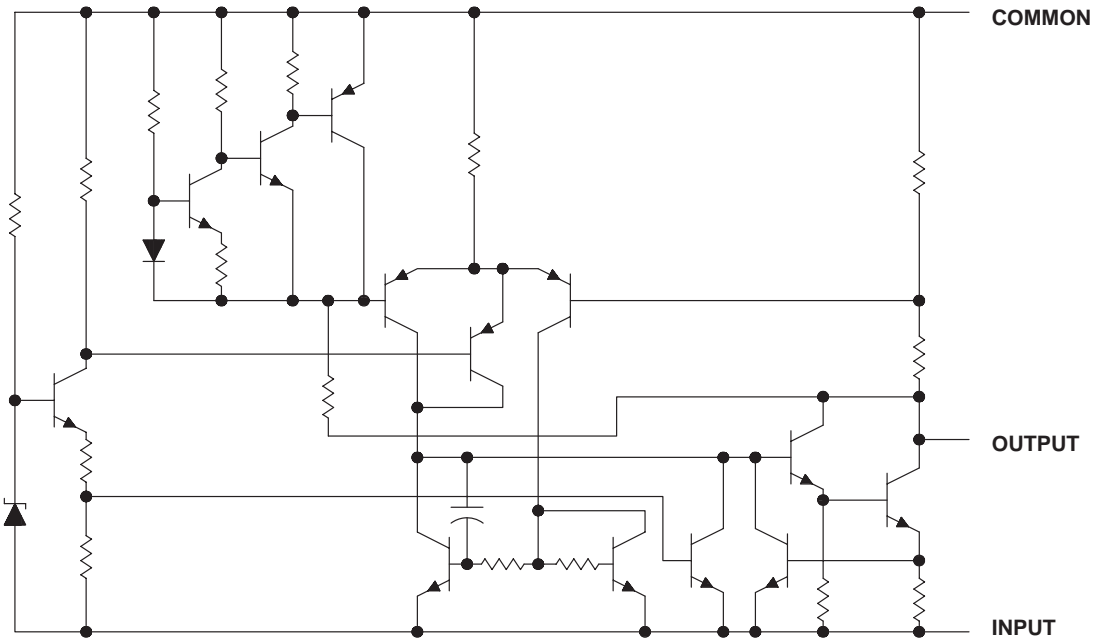


absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Input voltage: 79L05	-30V
Operating free-air, case, or virtual junction temperature	150 °C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260 °C
Storage temperature range, T_{stg}	-65 °C to 150 °C

recommended operating conditions

79L05	MIN	MAX	UNIT
Input voltage, V_I	-7	-20	v
Output current, I_O		100	mA
Operating virtual junction temperature, T_J	0	70	°C

Pad Location WS79L00

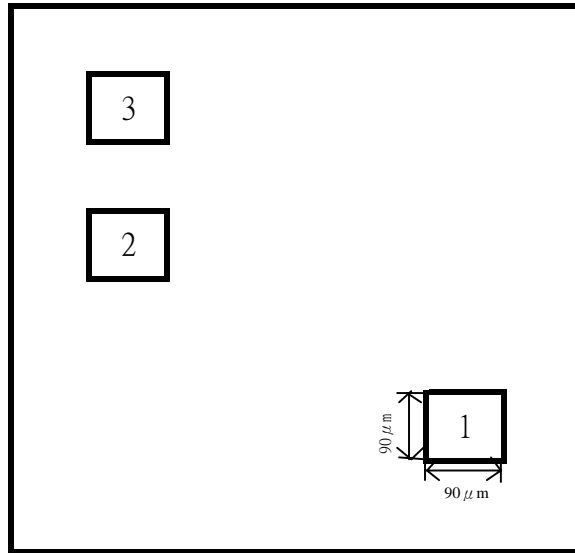

chip size 1.15 x 1.35mm

Pad Location Coordinates

Pad N	Pad Name	X(μ m)	Y(μ m)
1	Ground	1150	115
2	Input	115	690
3	Output	115	950



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.