

# SOT223 PNP SILICON PLANAR HIGH PERFORMANCE TRANSISTOR

## FZT751


ISSUE 2 – FEBRUARY 1995

### FEATURES

- \* 60 Volt  $V_{CE0}$
- \* 3 Amp continuous current
- \* Low saturation voltage

COMPLEMENTARY TYPE – FZT651

PARTMARKING DETAIL – FZT751



### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$V_{CBO}$	-80	V
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Peak Pulse Current	$I_{CM}$	-6	A
Continuous Collector Current	$I_C$	-3	A
Power Dissipation at $T_{amb}=25^{\circ}C$	$P_{tot}$	2	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$


### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-80			V	$I_C = -100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-60			V	$I_C = -10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5			V	$I_E = 100\mu A$
Collector Cut-Off Current	$I_{CBO}$			-0.1 -10	$\mu A$	$V_{CB} = -60V$ $V_{CB} = -60V, T_{amb} = 100^{\circ}C$
Emitter Cut-Off Current	$I_{EBO}$			-0.1	$\mu A$	$V_{EB} = -4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.15 -0.45	0.3 0.6	V	$I_C = -1A, I_B = -100mA^*$ $I_C = -3A, I_B = -300mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.9	-1.25	V	$I_C = -1A, I_B = -100mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-0.8	-1.0	V	$I_C = -1A, V_{CE} = -2V^*$
Static Forward Current Transfer Ratio	$h_{FE}$	70 100 80 40	200 200 170 150	300		$I_C = -50mA, V_{CE} = -2V^*$ $I_C = -500mA, V_{CE} = -2V^*$ $I_C = -1A, V_{CE} = -2V^*$ $I_C = -2A, V_{CE} = -2V^*$
Transition Frequency	$f_T$	100	140		MHz	$I_C = -100mA, V_{CE} = -5V$ $f = 100MHz$
Switching Times	$t_{on}$		40		ns	$I_C = -500mA, V_{CC} = -10V$
	$t_{off}$		450		ns	$I_{B1} = I_{B2} = -50mA$
Output Capacitance	$C_{obo}$			30	pF	$V_{CB} = -10V, f = 1MHz$

\*Measured under pulsed conditions. Pulse width=300 $\mu s$ . Duty cycle  $\leq 2\%$   
Spice parameter data is available upon request for this device

# FZT751

## TYPICAL CHARACTERISTICS

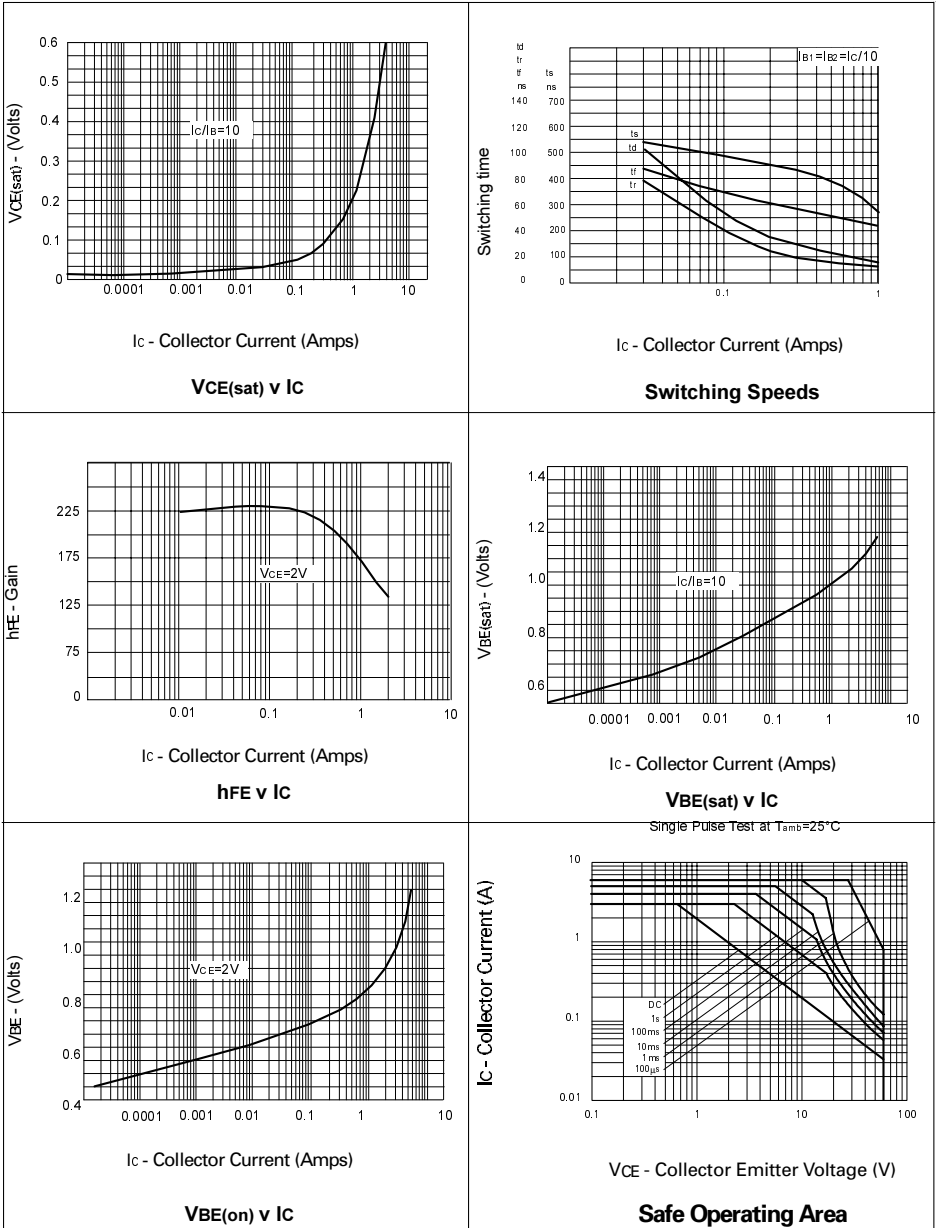



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.