


MECHANICAL DATA

Dimensions in mm (inches)

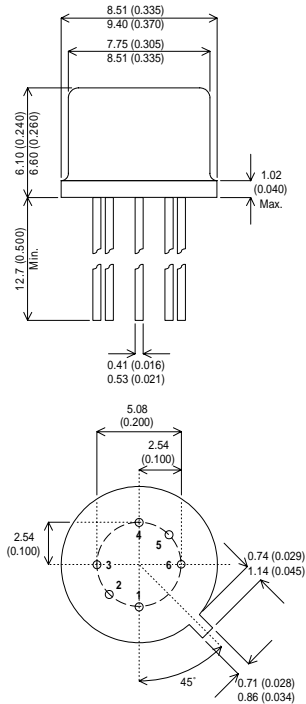

TO77

- Pin 1 – Collector 1
- Pin 2 – Base 1
- Pin 3 – Emitter 1
- Pin 4 – Emitter 2
- Pin 5 – Base 2
- Pin 6 – Collector 2

SILICON PLANAR EPITAXIAL NPN TRANSISTOR

DESCRIPTION

The BFY84 is a six terminal device containing two isolated silicon planar epitaxial NPN transistors in Jedec TO77 metal case.

The good thermal tracking over a wide current and temperature range, offers the circuit designer matched transistors with specified performance for differential amplifiers.

ABSOLUTE MAXIMUM RATINGS

V_{CBO}	Collector – Base Voltage ($I_E = 0$)	30V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	12V
V_{EBO}	Emitter – Base Voltage ($I_C = 0$)	3V
I_C	Collector Current	200mA
P_{tot}	Total Dissipation at $T_{amb} \leq 25^\circ C$ (one side)	0.3W
	$T_{amb} \leq 25^\circ C$ (both sides)	0.38W
	$T_{case} \leq 25^\circ C$ (one side)	0.6W
	$T_{case} \leq 25^\circ C$ (both sides)	0.98W
	$T_{case} \leq 100^\circ C$ (one side)	0.34W
	$T_{case} \leq 100^\circ C$ (both sides)	0.56W
T_{stg}, T_j	Storage and Junction Temperature	-65 to +200°C

THERMAL DATA

			One side	Both Sides	
$R_{thj-case}$	Thermal Resistance Junction-case	Max	292	178	°C/W
$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max	583	460	°C/W

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cut Off Current $V_{CB} = 15V$ $I_E = 0$ $T_{amb} = 150^{\circ}C$			10	nA
				1	μA
$V_{(BR)CBO}$	Collector Base Breakdown Voltage $I_C = 1\mu A$ $I_E = 0$	30			V
$V_{CEO(sus)*}$	Collector Emitter Sustaining Voltage $I_C = 3mA$ $I_B = 0$	12			V
$V_{(BR)EBO}$	Emitter Base Breakdown Voltage $I_C = 0$ $I_E = 10\mu A$	3			V
$V_{CE(sat)}$	Collector Emitter Saturation Voltage $I_C = 10mA$ $I_B = 1mA$			0.4	V
$V_{BE(sat)}$	Base Emitter Saturation Voltage $I_C = 10mA$ $I_B = 1mA$			1	V
$ V_{BE1} - V_{BE2} $	Input Offset Voltage $I_C = 3mA$ $V_{CE} = 1V$			15	mV
$\frac{ V_{BE1} - V_{BE2} }{\Delta T}$	Input Offset Voltage Temperature Coefficient $I_C = 3mA$ $V_{CE} = 1V$			25	$\mu V/^{\circ}C$
h_{FE}	DC Current Gain $I_C = 3mA$ $V_{CE} = 1V$	20			—
h_{FE1}/h_{FE2}	Matched Pair Ratio $I_C = 3mA$ $V_{CE} = 1V$			1.25	—
f_T	Transistion Frequency $I_C = 4mA$ $V_{CE} = 10V$ $f = 100MHz$	600			MHz
C_{EBO}	Emitter Base Capacitance $I_C = 0$ $f = 1MHz$ $V_{EB} = 0.5V$			2	pF
C_{CBO}	Collector Base Capacitance $I_E = 0$ $f = 1MHz$ $V_{CB} = -10V$			1.7	pF
NF	Noise Figure $I_C = 1mA$ $f = 60MHz$ $V_{CE} = 6V$			6	dB

* Pulse test $t_p = 300\mu s$, Duty Cycle = 1%



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.