


**GaAs FET**
*Data Sheet*

- Power amplifier for mobile phones
- For frequencies from 400 MHz to 2.5 GHz
- Wide operating voltage range: 2.7 to 6 V
- $V_D = 3\text{ V}$ ,  $f = 1.8\text{ GHz}$ ,  $P_{OUT} = 28.5\text{ dBm typ.}$
- High efficiency better 55%

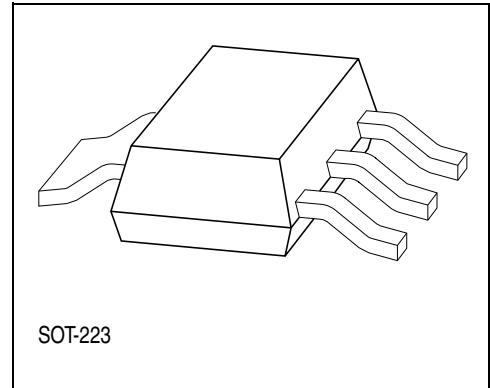

**ESD:** Electrostatic discharge sensitive device, observe handling precautions!

Type	Marking	Ordering Code (taped)	Pin Configuration				Package
			1	2	3	4	
CLY 10	CLY 10	Q62702-L94	G	S	D	S	P-SOT223-4-2

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	9	V
Drain-gate voltage	$V_{DG}$	12	V
Gate-source voltage	$V_{GS}$	- 6	V
Drain current	$I_D$	2.1	A
Channel temperature	$T_{Ch}$	150	°C
Storage temperature	$T_{stg}$	- 55 ... + 150	°C
Total power dissipation ( $T_S \leq 80\text{ °C}$ ) <sup>1)</sup>	$P_{totDC}$	3.5	W
Total power dissipation ( $T_S < 110\text{ °C}$ ) <sup>1)</sup>		2.0	

<sup>1)</sup>  $T_S$  is measured on the source lead to the PCB under load.

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Channel - soldering point <sup>1)</sup>	$R_{thChS}$	≤ 20	K/W

<sup>1)</sup>  $T_S$  is measured on the source lead to the PCB under load.

**Electrical Characteristics**
 $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified.


Characteristics	Symbol	Limit Values			Unit	Test Conditions
		min.	typ.	max.		
Drain-source saturation current	$I_{DSS}$	1.2	1.6	2.4	A	$V_{DS} = 3\text{ V}$ , $V_{GS} = 0\text{ V}$
Drain-source pinch-off current	$I_D$	–	–	200	$\mu\text{A}$	$V_{DS} = 3\text{ V}$ , $V_{GS} = -3.8\text{ V}$
Gate pinch-off current	$I_G$	–	10	35	$\mu\text{A}$	$V_{DS} = 3\text{ V}$ , $V_{GS} = -3.8\text{ V}$
Pinch-off Voltage	$V_{GS(p)}$	– 3.8	– 2.8	– 1.8	V	$V_{DS} = 3\text{ V}$ , $I_D = 200\text{ }\mu\text{A}$
Small Signal Gain <sup>1)</sup>	$G$	–	9	–	dB	$V_{DS} = 3\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$ , $P_{IN} = 0\text{ dBm}$
Small Signal Gain <sup>2)</sup>	$G$	–	8	–	dB	$V_{DS} = 3\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$ , $P_{IN} = 0\text{ dBm}$
Output Power	$P_O$	28	28.5	–	dBm	$V_{DS} = 3\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$ , $P_{IN} = 20.5\text{ dBm}$
Output Power	$P_O$	32.0	32.5	–	dBm	$V_{DS} = 5\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 0.9\text{ GHz}$ , $P_{IN} = 20\text{ dBm}$
1 dB-Compression Point	$P_{1\text{ dB}}$	–	28.5	–	dBm	$V_{DS} = 3\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$

**Electrical Characteristics (cont'd)**
 $T_A = 25\text{ °C}$ , unless otherwise specified.


Characteristics	Symbol	Limit Values			Unit	Test Conditions
		min.	typ.	max.		
1 dB-Compression Point	$P_{1\text{ dB}}$	–	32.5	–	dBm	$V_{DS} = 5\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$
Power Added Efficiency	PAE	40	55	–	%	$V_{DS} = 5\text{ V}$ , $I_D = 700\text{ mA}$ , $f = 1.8\text{ GHz}$ , $P_{IN} = 20\text{ dBm}$

- 1) Matching conditions for maximum small signal gain:  $f = 1.8\text{ GHz}$   
 Source Match:  $G_{MS}$ : MAG = 0.70, ANG – 116°; Load Match:  $G_{ML}$ : MAG 0.68, ANG – 145°
- 2) Power matching conditions:  $f = 1.8\text{ GHz}$   
 Source Match:  $G_{MS}$ : MAG = 0.70, ANG – 120°; Load Match:  $G_{ML}$ : MAG 0.68, ANG – 130°


**Compression Power vs. Drain-Source Voltage**  
 $f = 1.8 \text{ GHz}; I_{DS} = 0.5 \times I_{DSS}$

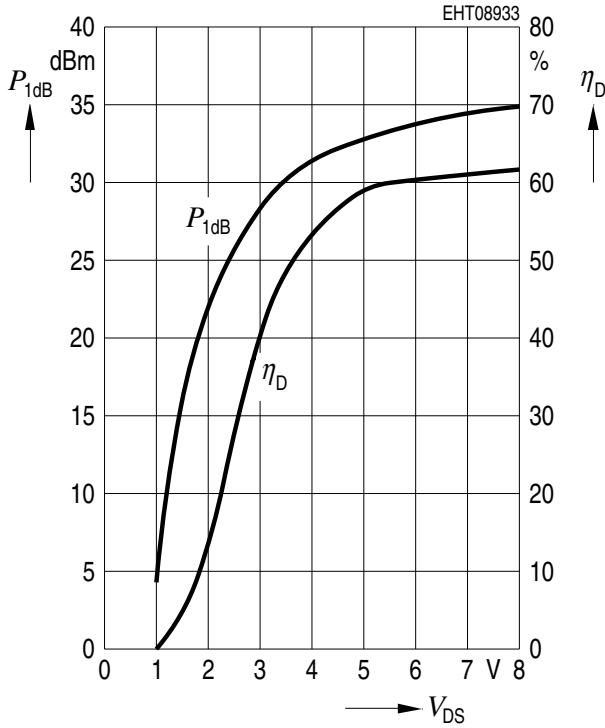

**Gain and  $P_{1dB}$  vs. Drain Source Voltage,**  
 $f = 1.8 \text{ GHz}; I_{DS} = 0.5 \times I_{DSS}$

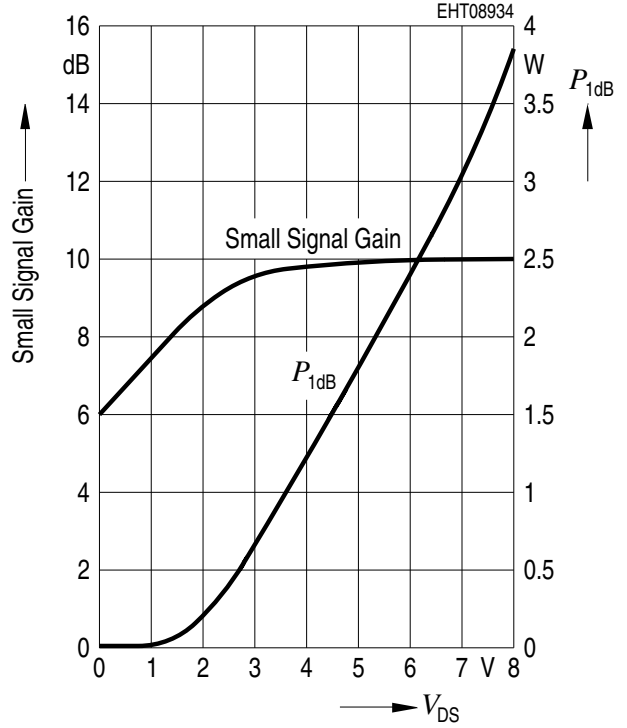

**Output Characteristics**

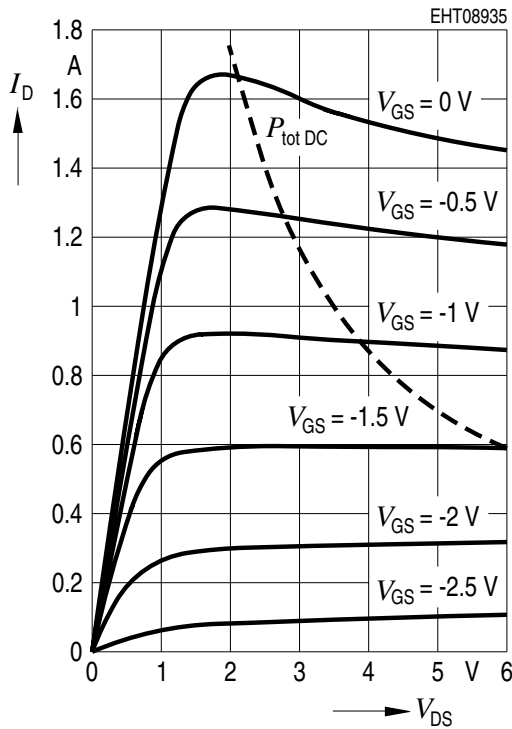

**Typ. Common Source S-Parameters**

$$V_{DS} = 5 \text{ V}, I_D = 700 \text{ mA}, Z_o = 50 \Omega$$

<i>f</i>	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.1	0.96	- 48.5	14.2	150.6	0.01079	68.9	0.45	- 171.9
0.15	0.93	- 68.8	12.97	137.9	0.01503	60.6	0.47	- 171.3
0.2	0.91	- 86.4	11.48	127.5	0.01801	54.4	0.5	- 173.3
0.25	0.88	- 101	10.26	119.1	0.02041	50.1	0.53	- 174.5
0.3	0.87	- 113.2	9.19	111.4	0.02224	45.9	0.55	- 175.6
0.4	0.84	- 132.9	7.43	99.4	0.02486	41.7	0.56	- 179.8
0.5	0.83	- 147.7	6.17	89.4	0.02691	39.1	0.58	177.5
0.6	0.82	- 159.5	5.25	81.2	0.02894	37.6	0.59	173.8
0.7	0.82	- 169.4	4.54	73.9	0.03078	36.7	0.6	171.4
0.8	0.81	- 177.9	3.98	67.1	0.03264	35.8	0.61	168.7
0.9	0.82	174.5	3.55	61	0.03469	35	0.61	165.8
1	0.82	167.7	3.17	55.1	0.03667	34.4	0.62	163.9
1.2	0.82	155.7	2.62	43.9	0.04065	32.4	0.64	158.8
1.4	0.83	145.1	2.2	33.6	0.04503	29.9	0.65	153.6
1.5	0.84	140.1	2.04	28.7	0.04721	28.8	0.66	151.6
1.6	0.84	135.4	1.88	23.8	0.04917	27.2	0.67	148.5
1.8	0.85	126.3	1.63	14.3	0.05335	23.5	0.69	143.3
2	0.86	118	1.42	5.1	0.05705	19.7	0.71	138.5
2.2	0.87	110.1	1.25	- 3.6	0.0602	15.9	0.72	133.8
2.4	0.88	102.8	1.1	- 12.2	0.06313	12	0.73	129
2.5	0.88	99.1	1.03	- 16.1	0.06448	9.9	0.74	125.9

**Typ. Common Source S-Parameters (cont'd)**


$$V_{DS} = 5 \text{ V}, I_D = 700 \text{ mA}, Z_o = 50 \Omega$$

<i>f</i>	S11		S21		S12		S22	
	<b>GHZ</b>	<b>MAG</b>	<b>ANG</b>	<b>MAG</b>	<b>ANG</b>	<b>MAG</b>	<b>ANG</b>	<b>MAG</b>
3	0.9	83.3	0.76	- 34.4	0.06956	- 0.2	0.77	113.9
3.5	0.91	70.3	0.57	- 49	0.07219	- 9	0.81	102.8
4	0.91	59.3	0.45	- 60.5	0.07429	- 17.1	0.83	92.1
4.5	0.92	48.9	0.37	- 71.1	0.07489	- 25.5	0.85	82.5
5	0.93	39.2	0.31	- 81.2	0.07614	- 32.9	0.89	72.3
5.5	0.93	29.5	0.26	- 90.4	0.07667	- 40.9	0.9	61.7
6	0.92	20.6	0.23	- 97.9	0.07466	- 48.6	0.91	51

Additional S-Parameter available on data disc!


**Total Power Dissipation**

$$P_{\text{tot\_DC}} = f(T_S)$$

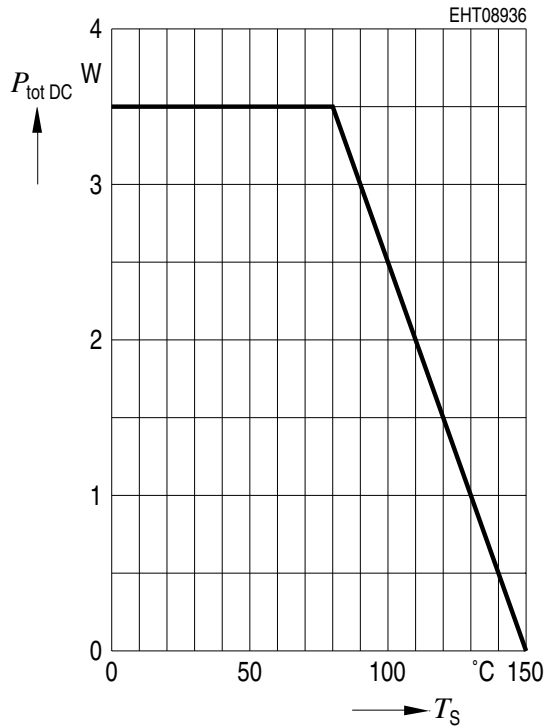


**Permissible Pulse Load**

$$P_{\text{tot\_max}}/P_{\text{tot\_DC}} = f(t_p)$$

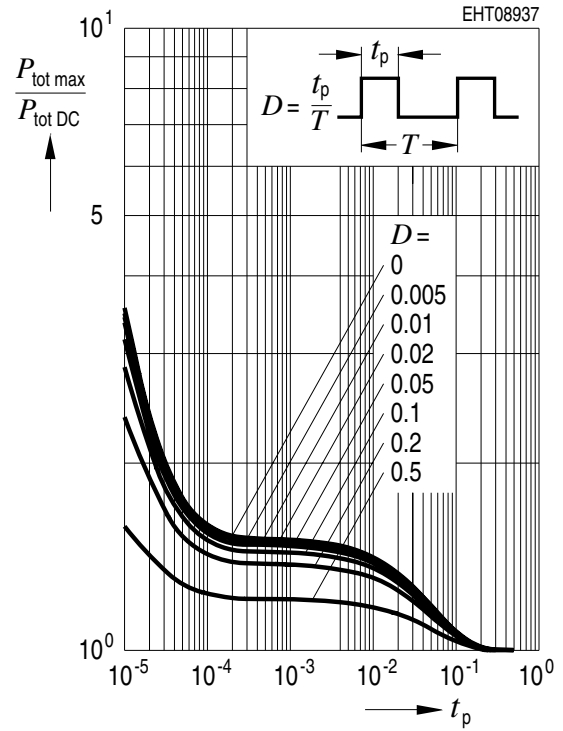

Package Outlines

**P-SOT223-4-2**  
(Small Outline Transistor)

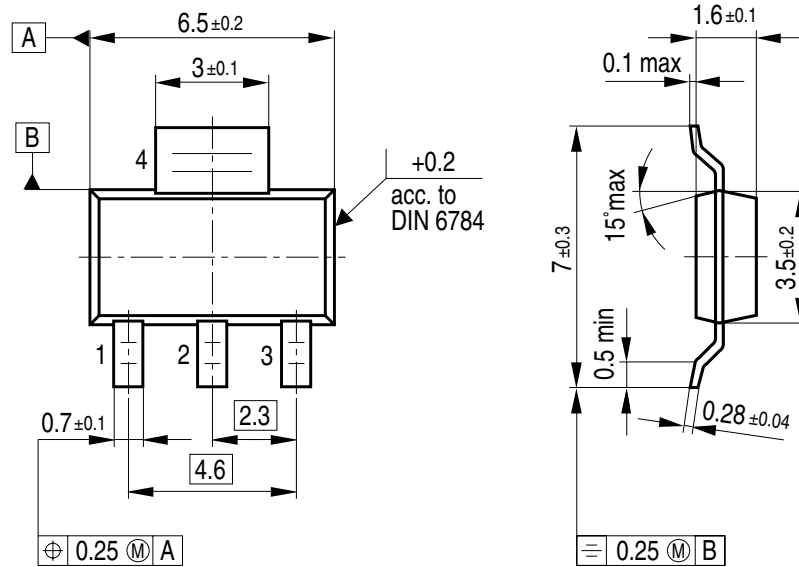

GPS05560

**Sorts of Packing**

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

**SMD = Surface Mounted Device**

Dimensions in mm



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.