

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

2N2917

NPN SILICON
DUAL TRANSISTOR

JEDEC TO-78 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR 2N2917 is a silicon NPN dual transistor utilizing two individual chips mounted in a hermetically sealed metal case designed for differential amplifier applications.

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

	<u>SYMBOL</u>		<u>UNITS</u>
Collector-Base Voltage	V_{CB0}	45	V
Collector-Emitter Voltage	V_{CE0}	45	V
Emitter-Base Voltage	V_{EB0}	6.0	V
Collector Current	I_C	30	mA
Power Dissipation (One Die)	P_D	300	mW
Power Dissipation (Both Dice)	P_D	500	mW
Power Dissipation (One Die, $T_C=25^\circ\text{C}$)	P_D	750	mW
Power Dissipation (Both Dice, $T_C=25^\circ\text{C}$)	P_D	1500	mW
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
I_{CBO}	$V_{CB}=45\text{V}$		10	nA
I_{CEO}	$V_{CE}=45\text{V}$		2.0	nA
I_{EBO}	$V_{EB}=5.0\text{V}$		2.0	nA
BV_{CB0}	$I_C=10\mu\text{A}$	45		V
BV_{CE0}	$I_C=10\text{mA}$	45		V
BV_{EB0}	$I_E=10\mu\text{A}$	6.0		V
$V_{CE(s)}$	$I_C=1.0\text{mA}, I_B=0.1\text{mA}$		0.35	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}$		0.7	V
h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\mu\text{A}$	60	240	
h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\mu\text{A}, T_A=-55^\circ\text{C}$	15		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}$	100		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	150		
f_T	$V_{CE}=5.0\text{V}, I_C=500\mu\text{A}, f=20\text{MHz}$	60		Mhz


(OVER)

ELECTRICAL CHARACTERISTICS (cont.) ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
C_{ob}	$V_{CB}=5.0\text{V}$, $I_E=0$, $f=140\text{kHz}$		6.0	pF
NF	$V_{CE}=5.0\text{V}$, $I_C=10\mu\text{A}$, $R_S=10\text{k}\Omega$, $f=1.0\text{kHz}$, $BW=200\text{Hz}$		4.0	dB
h_{FE1}/h_{FE2}	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$	0.8	1.0	
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=10\mu\text{A}$		10	mV
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$		5.0	mV
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=1.0\text{mA}$		10	mV
$\Delta(V_{BE1}-V_{BE2})$	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$, $T_A=-55^{\circ}\text{C}$ to $+25^{\circ}\text{C}$		1.6	mV
$\Delta(V_{BE1}-V_{BE2})$	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$, $T_A=+25^{\circ}\text{C}$ to $+125^{\circ}\text{C}$		2.0	mV

TO-78 MECHANICAL OUTLINE

All Dimensions in inches (mm).

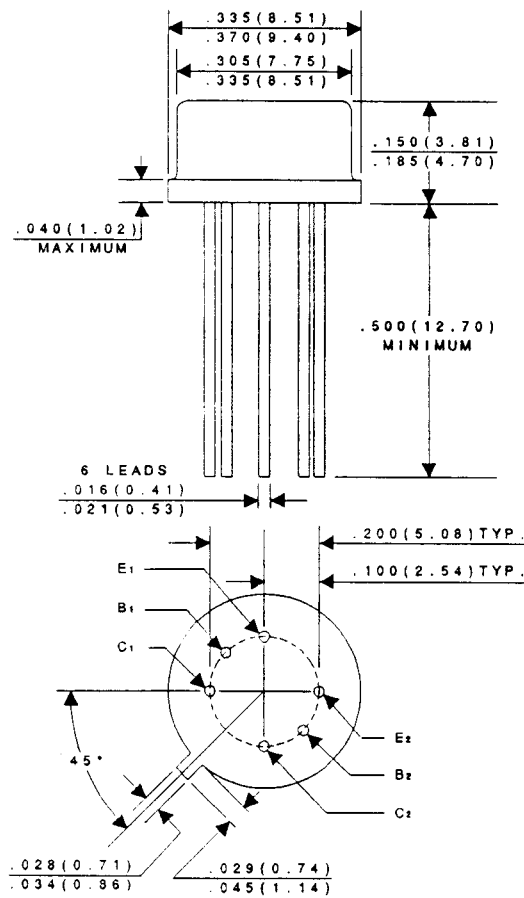



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.