

## NPN POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/510

### Devices

2N6249  
2N6250

2N6251

### Qualified Level

JAN  
JANTX  
JANTXV  
JANHC


### MAXIMUM RATINGS

Ratings	Symbol	2N6249	2N6250	2N6251	Units
Collector-Emitter Voltage	$V_{CEO}$	200	275	350	Vdc
Collector-Base Voltage	$V_{CBO}$	300	375	450	Vdc
Emitter-Base Voltage	$V_{EBO}$	6.0			Vdc
Collector Current	$I_C$	10			Adc
Base Current	$I_B$	5.0			Adc
Total Power Dissipation @ $T_A = +25^{\circ}\text{C}$ <sup>(1)</sup> @ $T_C = +25^{\circ}\text{C}$ <sup>(2)</sup>	$P_T$	5.5			W
		175			W
Operating & Storage Temp Range	$T_{op}, T_{stg}$	-55 to +200			$^{\circ}\text{C}$

### THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.0	$^{\circ}\text{C}/\text{W}$

- 1) Derate linearly at 34.2 mW/ $^{\circ}\text{C}$  for  $T_A > +25^{\circ}\text{C}$
- 2) Derate linearly at 1.0 W/ $^{\circ}\text{C}$  for  $T_C > +25^{\circ}\text{C}$

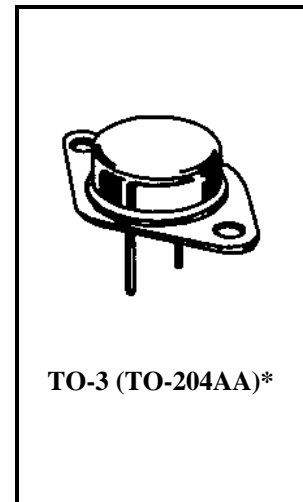

\*See Appendix A for Package Outline

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
Collector-Emitter Breakdown Voltage $I_C = 200$ mAdc; $L = 42$ mH; $F = 30$ -60 Hz (See Figure 3 of MIL-PRF-19500/510)	$V_{(BR)CEO}$	200 275 350		Vdc
Collector-Emitter Breakdown Voltage $I_C = 200$ mAdc; $L = 14$ mH; $F = 30$ -60 Hz; $R_{BE} = 50\Omega$ (See Figure 3 of MIL-PRF-19500/510)	$V_{(BR)CER}$	225 300 375		Vdc
Emitter-Base Cutoff Current $V_{EB} = 6$ Vdc	$I_{EBO}$		100	$\mu\text{Adc}$
Collector-Emitter Cutoff Current $V_{CE} = 150$ Vdc $V_{CE} = 225$ Vdc $V_{CE} = 300$ Vdc	$I_{CEO}$		1.0 1.0 1.0	mAdc

**2N6249, 2N6250, 2N6251 JAN SERIES**

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics		Symbol	Min.	Max.	Unit
<b>OFF CHARACTERISTICS (con't)</b>					
Collector-Emitter Cutoff Current V <sub>CE</sub> = 225 Vdc; V <sub>BE</sub> = -1.5 Vdc V <sub>CE</sub> = 300 Vdc; V <sub>BE</sub> = -1.5 Vdc V <sub>CE</sub> = 375 Vdc; V <sub>BE</sub> = -1.5 Vdc	2N6249 2N6250 2N6251	I <sub>CEX</sub>		100 100 100	μAdc
Collector-Base Cutoff Current V <sub>CB</sub> = 300 Vdc V <sub>CB</sub> = 375 Vdc V <sub>CB</sub> = 450 Vdc	2N6249 2N6250 2N6251	I <sub>CBO</sub>		0.5 0.5 0.5	mAdc

**ON CHARACTERISTICS<sup>(3)</sup>**

Forward-Current Transfer Ratio I <sub>C</sub> = 10 Adc; V <sub>CE</sub> = 3 Vdc	2N6249 2N6250 2N6251	h <sub>FE</sub>	10 8 6	50 50 50	
Collector-Emitter Saturated Voltage I <sub>B</sub> = 1.0 Adc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.25 Adc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.67 Adc; I <sub>C</sub> = 10 Adc	2N6249 2N6250 2N6251	V <sub>CE(sat)</sub>		1.5 1.5 1.5	Vdc
Base-Emitter Saturated Voltage I <sub>B</sub> = 1.0 Adc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.25 Adc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.67 Adc; I <sub>C</sub> = 10 Adc	2N6249 2N6250 2N6251	V <sub>BE(sat)</sub>		2.25 2.25 2.25	Vdc

**DYNAMIC CHARACTERISTICS**

Magnitude of Small-Signal Short-Circuit Forward Current Transfer Ratio I <sub>C</sub> = 1.0 Adc, V <sub>CE</sub> = 10 Vdc, f = 1 MHz		h <sub>fe</sub>	2.5	15	
Output Capacitance V <sub>CB</sub> = 10 Vdc, I <sub>C</sub> = 0, 100 kHz ≤ f ≤ 1.0 MHz		C <sub>obo</sub>		500	pF

**SWITCHING CHARACTERISTICS**

Turn-On Time V <sub>CC</sub> = 200 Vdc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.0 Adc I <sub>B</sub> = 1.25 Adc I <sub>B</sub> = 1.67 Adc	2N6249 2N6250 2N6251	t <sub>on</sub>		2.0 2.0 2.0	μs
Turn-Off Time V <sub>CC</sub> = 200 Vdc; I <sub>C</sub> = 10 Adc I <sub>B</sub> = 1.0 Adc I <sub>B</sub> = 1.25 Adc I <sub>B</sub> = 1.67 Adc	2N6249 2N6250 2N6251	t <sub>off</sub>		4.5 4.5 4.5	μs

**SAFE OPERATING AREA**

<p><b>DC Tests</b> T<sub>C</sub> = +25°C; t = 1 s, 1 cycle (See Figure 5 of MIL-PRF-19500/510)</p> <p><b>Test 1</b> V<sub>CE</sub> = 17.5 Vdc, I<sub>C</sub> = 10 Adc</p> <p><b>Test 2</b> V<sub>CE</sub> = 30 Vdc, I<sub>C</sub> = 5.8 Adc</p> <p><b>Test 3</b> V<sub>CE</sub> = 100 Vdc, I<sub>C</sub> = 0.3 Adc</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

3) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.