


Central  
Semiconductor Corp.  
Central  
Semiconductor Corp.  
Central  
Semiconductor Corp.  
Central™  
Semiconductor Corp.

145 Adams Avenue  
Hauppauge, New York 11788



**C2Z100B THRU C2Z330B**

**2.0 WATT ZENER DIODE**  
**100 Volts thru 330 Volts**

**JEDEC DO-41 CASE**

**DESCRIPTION**

The Central Semiconductor C2Z100B Series Silicon Zener Diode is a high quality epoxy molded voltage regulator for use in industrial, commercial, entertainment and computer applications.

**ABSOLUTE MAXIMUM RATINGS**

Power Dissipation (@  $T_A = 50^\circ\text{C}$ )  
Operating and Storage Temperature  
Tolerance "B Suffix"

**SYMBOL**


$P_D$  2.0  
 $T_J, T_{STG}$   $-65$  to  $+150^\circ\text{C}$   
 $\pm 5$

**UNIT**

W  
 $^\circ\text{C}$   
%

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ ),  $V_F = 1.2\text{V MAX @ } I_F = 1\text{A}$  FOR ALL TYPES.

TYPE	Zener Voltage	Test Current	Maximum Zener Impedance			Maximum Reverse Current		Maximum DC Current
	$V_Z @ I_{Z1}$	$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		$I_{ZM}$
	Volts	mA	$\Omega$	$\Omega$	mA	$\mu\text{A}$	Volts	mA
C2Z100B	100	5.0	350	3,000	0.25	5.0	76.0	20.0
C2Z110B	110	4.6	450	4,000	0.25	5.0	83.6	18.2
C2Z120B	120	4.0	550	4,500	0.25	5.0	91.2	16.6
C2Z130B	130	3.8	700	5,000	0.25	5.0	98.8	15.4
C2Z150B	150	3.4	1,000	6,000	0.25	5.0	114.0	13.4
C2Z160B	160	3.2	1,100	6,500	0.25	5.0	121.6	12.6
C2Z180B	180	2.8	1,200	7,000	0.25	5.0	136.8	11.2
C2Z200B	200	2.4	1,500	8,000	0.25	5.0	152.0	10.0
C2Z300B	300	1.7	5,000	9,000	0.25	5.0	240.0	6.6
C2Z330B	330	1.5	5,000	9,000	0.25	5.0	260.0	6.0

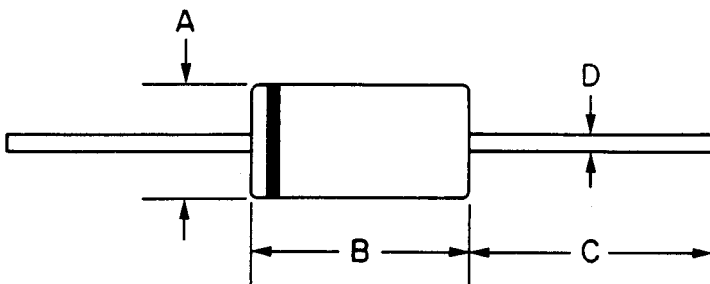

EPOXY MOLDED CASE WITH TIN PLATED LEADS

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.080	.107	2.0	2.7
B	.160	.205	4.1	5.2
C	1.0	—	25.4	—
D	.028	.034	0.71	0.86

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.