

PNP Germanium RF Transistor

AF 240


SIEMENS AKTIENGESELLSCHAFT

T-31-07

for mixer and oscillator stages up to 900 MHz

AF 240 is a germanium PNP mesa transistor in TO 72 case (18 A 4 DIN 41 876). The leads are electrically insulated from the case.

Type	Ordering code
AF 240	Q60106-X240



Approx. weight 0.4 g

Dimensions in mm

Maximum ratings

Collector-emitter voltage	$-V_{CEO}$	15	V
Collector-emitter voltage	$-V_{CES}$	20	V
Emitter-base voltage	$-V_{EBO}$	0.3	V
Collector current	$-I_C$	10	mA
Emitter current	I_E	11	mA
Base current	$-I_B$	1	mA
Junction temperature	T_j	90	°C
Storage temperature range	T_{stg}	-30 to +75	°C
Total power dissipation ($T_{amb} \leq 45^\circ\text{C}$)	P_{tot}	60	mW

Thermal resistance

Junction to ambient air	R_{thJA}	≤ 750	K/W
Junction to case	R_{thJC}	≤ 400	K/W

T-31-07

Static characteristics ($T_{amb} = 25^{\circ}\text{C}$)

$-V_{CE}$ V	$-I_C$ mA	$-I_B$ μA	h_{FE} I_C/I_B	$-V_{BE}$ mV
10	2	80	25 (>10)	370

Collector cutoff current ($-V_{CES} = 20\text{ V}$)	$-I_{CES}$	0.5 (<8)	μA
Collector cutoff current ($-V_{CEO} = 15\text{ V}$)	$-I_{CEO}$	<500	μA
Emitter cutoff current ($-V_{EBO} = 0.3\text{ V}$)	$-I_{EBO}$	<100	μA

Dynamic characteristics ($T_{amb} = 25^{\circ}\text{C}$)

Transition frequency ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 100\text{ MHz}$)	f_T	500	MHz
Reverse transfer capacitance ($-I_C = 1\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 1\text{ MHz}$)	$-C_{12e}$	0.26	pF
Power gain ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$; $R_L = 2\text{ k}\Omega$)	G_{pb}	13	dB
Power gain ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$; $R_L = 50\Omega$)	G_{pb}	11	dB
Noise figure ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$; $R_g = 60\Omega$)	NF	6.5	dB
($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 200\text{ MHz}$; $R_g = 60\Omega$)	NF	3	dB

Four-pole characteristics (measured at a spacing of 1 mm)

Operating point: $-I_C = 3\text{ mA}$; $-V_{CE} = 10\text{ V}$;


$f = 800\text{ MHz}$:

$g_{11b} = 4,8\text{ mS}$	$ y_{12b} = 0,31\text{ mS}$	$ y_{21b} = 22\text{ mS}$	$g_{22b} = 0,5\text{ mS}$
$b_{11b} = -25\text{ mS}$	$\varphi_{12b} = -108^{\circ}$	$\varphi_{21b} = 25^{\circ}$	$b_{22b} = 5,2\text{ mS}$


$f = 400\text{ MHz}$:

$g_{11b} = 30\text{ mS}$	$ y_{12b} = 0,25\text{ mS}$	$ y_{21b} = 51\text{ mS}$	$g_{22b} = 0,2\text{ mS}$
$b_{11b} = -46\text{ mS}$	$\varphi_{12b} = -90^{\circ}$	$\varphi_{21b} = 85^{\circ}$	$b_{22b} = 2,5\text{ mS}$


Total perm. power dissipation versus temperature $P_{tot} = f(T)$;
 R_{th} = parameter

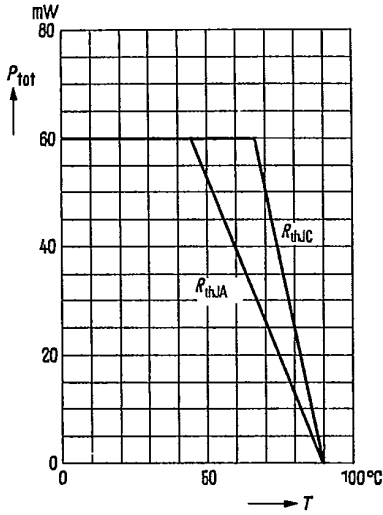


Output characteristics $I_C = f(V_{CE})$;
 I_B = parameter

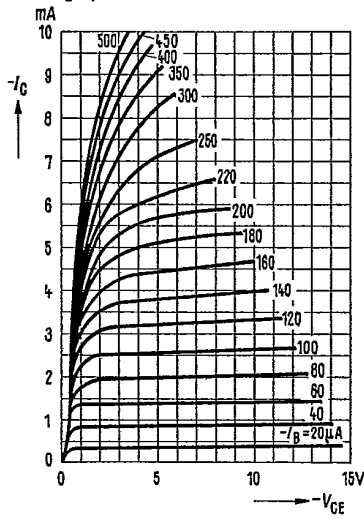

Collector cutoff current versus temperature
 $I_{CBO} = f(T_{amb})$; $-V_{CE} = 20V$

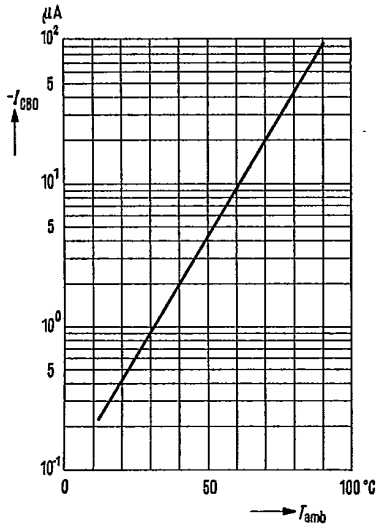

Transition frequency $f_T = f(I_C)$
 $-V_{CE} =$ parameter; $f = 100 MHz$

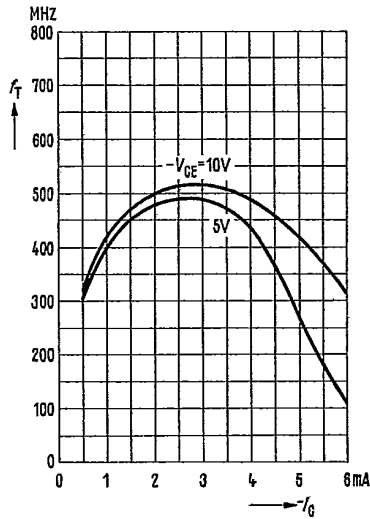

PNP Germanium UHF Transistor

AF 279 S


SIEMENS AKTIENGESELLSCHAFT 25C 04079 D _____

T-31-07

for input stages up to 900 MHz

AF 279 S is a germanium PNP UHF planar transistor with passivated surface in low-capacitance 50 B 3 DIN 41867 plastic package similar to TO 119. This transistor is particularly intended for use in low-noise regulated input stages up to 900 MHz in diode-tuned tuners.

Type	Ordering code
AF 279 S	Q62701-F87



Approx. weight 0.25 g

Dimensions in mm

Maximum ratings

Collector-emitter voltage	$-V_{CEO}$	15	V
Collector-emitter voltage	$-V_{CES}$	20	V
Emitter-base voltage	$-V_{EBO}$	0.3	V
Collector current	$-I_C$	10	mA
Emitter current	I_E	11	mA
Base current	$-I_B$	1	mA
Junction temperature	T_j	90	°C
Storage temperature range	T_{stg}	-30 to +75	°C
Total power dissipation	P_{tot}	60	mW

Thermal resistance

Junction to ambient air	R_{thJA}	≤ 600	K/W
-------------------------	------------	-------	-----

Static characteristics ($T_{amb} = 25^\circ\text{C}$)

$-V_{CE}$ V	$-I_C$ mA	$-I_B$ μA	h_{FE} I_C/I_B	$-V_{BE}$ mV
10	2	40	50 (<10)	350
5	5	110	45	400

Collector cutoff current ($-V_{CES} = 20\text{ V}$)	$-I_{CES}$	1 (<15)	μA
Collector cutoff current ($-V_{CEO} = 15\text{ V}$)	$-I_{CEO}$	<500	μA
Emitter cutoff current ($-V_{EBO} = 0.3\text{ V}$)	$-I_{EBO}$	<100	μA

Dynamic characteristics ($T_{amb} = 25^\circ\text{C}$)


Transition frequency ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 100\text{ MHz}$)	f_T	820	MHZ
Collector base capacitance ($-V_{CB} = 10\text{ V}$; $f = 1\text{ MHz}$)	$-C_{CB0}$	0.4	pF
Power gain ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$; $R_L = 2\text{ k}\Omega$)	G_{pb}	20	dB
($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 900\text{ MHz}$; $R_L = 500\Omega$)	G_{pb}	12	dB
Noise figure ($-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$; $R_g = 60\Omega$)	NF	<4.5	dB

Four-pole characteristics:

$-I_C = 2\text{ mA}$; $-V_{CE} = 10\text{ V}$; $f = 800\text{ MHz}$ (measured at a spacing of 1.5 mm)

$g_{11b} = 23\text{ mS}$	$ y_{12b} = 0,6\text{ mS}$	$ y_{21b} = 38\text{ mS}$	$g_{22b} = 0,3\text{ mS}$
$-b_{11b} = 33\text{ mS}$	$\varphi_{12b} = -90^\circ$	$\varphi_{21b} = 75^\circ$	$b_{22b} = 2,5\text{ mS}$

Test circuit for power gain and noise figure at $f = 800\text{ MHz}$

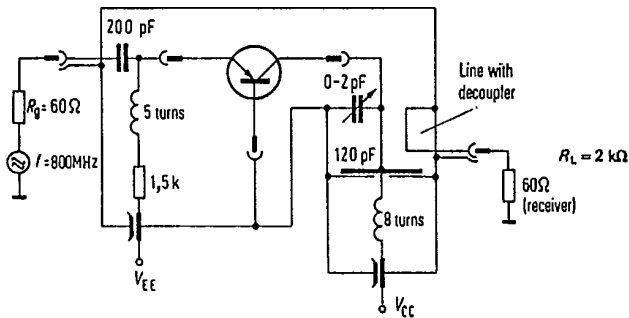



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.