



## 2SB435


## PNP EPITAXIAL SILICON TRANSISTOR

### LOW FREQUENCY POWER AMPLIFIER

- Complement to 2SD235

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ )

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CB0</sub>	-50	V
Collector-Emitter Voltage	V <sub>CE0</sub>	-40	V
Emitter-Base voltage	V <sub>EB0</sub>	-5	V
Collector Current (DC)	I <sub>C</sub>	-3	A
Collector Dissipation ( $T_c=25^\circ\text{C}$ )	P <sub>C</sub>	25	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-50~150	°C

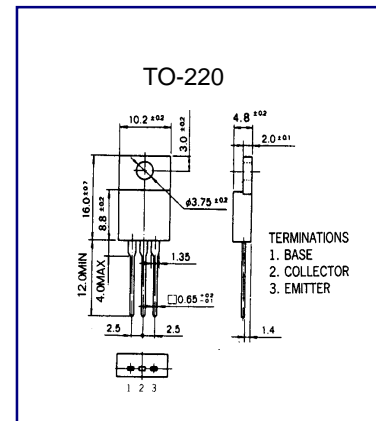

### ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ )

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = -50V, I <sub>E</sub> =0			-10	μA
Emitter Cutoff Current	I <sub>EB0</sub>	V <sub>EB</sub> = -5V, I <sub>C</sub> =0			10	μA
DC Current Gain	h <sub>FE1</sub>	V <sub>CE</sub> = -5V, I <sub>C</sub> =-0.5A	40		240	
Collector- Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-3A, I <sub>B</sub> =-0.3A			-1.0	V
Current Gain Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> = -2V, I <sub>C</sub> =-0.5A		18		MHZ



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.