

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

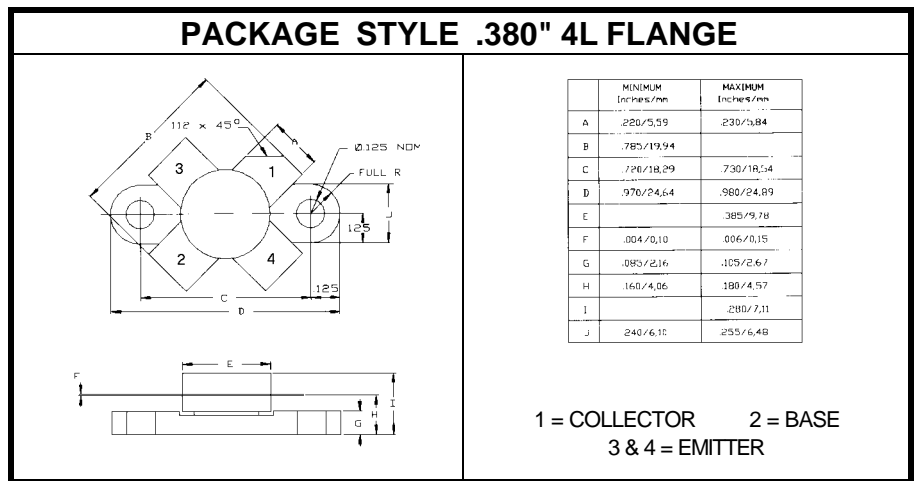
The **HF50-12** is Designed for 12.5 Volt Class AB and Class C Power Amplifier Applications Operating in the 2 to 32 MHz HF Band.

FEATURES INCLUDE:

- High Gain, 16 dB Typical @ 30 MHz
- Emitter Ballasting
- Withstands Severe Mismatch

MAXIMUM RATINGS

I_C	10 A
V_{CB}	36 V
V_{CE}	18 V
V_{EB}	4.0 V
P_{DISS}	175 W @ T _C = 25 °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
q_{JC}	1.0 °C/W


CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CES}	I _C = 100 mA	36			V
BV_{CEO}	I _C = 100 mA	18			V
BV_{EBO}	I _E = 10 mA	4.0			V
I_{CES}	V _{CE} = 15 V			10	mA
h_{FE}	V _{CE} = 5.0 V I _C = 5.0 A	20			---
C_{ob}	V _{CB} = 12.5 V f = 1.0 MHz		200		pF
G_{PE}	V _{CC} = 12.5 V I _{CQ} = 50 mA P _{OUT} = 50 W(PEP) f = 30 MHz	15	16		dB
h			55		%
IMD			-30		dB



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.