

BF491, BF492, BF493 are PNP silicon planar transistors designed for high voltage video amplifiers in television receivers requiring high breakdown voltage and low capacitance.



EBC

ABSOLUTE MAXIMUM RATINGS

Collector-Emitter Voltage

$V_{CEO}$

	BF491	BF492	BF493
$V_{CEO}$	200V	250V	300V
$V_{CBO}$	200V	250V	300V
$V_{EBO}$	6V	8V	8V
$I_C$		500mA	
$P_D$		625mW	
		1.2mW/°C	
		1.5W	
		12mW/°C	
$T_j, T_{stg}$	-55 to 150°C		

Collector-Base Voltage

$V_{CBO}$

Emitter-Base Voltage

$V_{EBO}$

Collector Current

$I_C$

Total Device Dissipation @  $T_A=25^\circ C$

$P_D$

Derate Above 25°C

Total Device Dissipation @  $T_C=25^\circ C$

$P_D$

Derate Above 25°C

Operating & Storage Junction Temperature Range

$T_j, T_{stg}$

ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ C$  unless otherwise noted)






PARAMETER	SYMBOL	BF491		BF492		BF493		UNIT	TEST CONDITION
		MIN	MAX	MIN	MAX	MIN	MAX		
Collector-Base Breakdown Voltage	$V_{CBO}$	200		250		300		V	$I_C=0.1mA$ $I_E=0$
Collector-Emitter Breakdown Voltage	$V_{CEO}^*$	200		250		300		V	$I_C=1mA$ $I_B=0$
Emitter-Base Breakdown Voltage	$V_{EBO}$	6		8		8		V	$I_E=0.1mA$ $I_C=0$
Collector Cutoff Current	$I_{CBO}$	0.1						$\mu A$	$V_{CB}=160V$ $I_E=0$
				0.1		0.1		$\mu A$	$V_{CB}=200V$ $I_E=0$
Emitter Cutoff Current	$I_{EBO}$	0.1						$\mu A$	$V_{EB}=4V$ $I_C=0$
				0.1		0.1		$\mu A$	$V_{EB}=6V$ $I_C=0$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	2		2		2		V	$I_C=20mA$ $I_B=2I_C$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	2		2		2		V	$I_C=20mA$ $I_B=2I_C$
D.C. Current Gain	$H_{FE}$	25		25		25			$I_C=1mA$ $V_{CE}=10V$
		40		40		40			$I_C=10mA$ $V_{CE}=10V$
Current Gain-Bandwidth Product	$f_T$	50		50		50		MHz	$I_C=10mA$ $V_{CE}=20V$
Feedback Capacitance	$C_{re}$	2		2		2		pF	$V_{CB}=100V$ $I_E=0$ $f=1MHz$

\* Pulse Test : Pulse Width  $\leq 300\mu S$ , Duty Cycle  $\leq 2\%$ .



MICRO ELECTRONICS LTD. 美科有限公司

38 Hung To Road, Kwun Tong, Kowloon, Hong Kong. Cable: Microtron, Hong Kong. Telex: 43510 Micro HX.  
P.O. Box 49477, Kwun Tong. Tel: 3-430181-6 3-893363, 3-892423, 3-898224 FAX: 3-410321

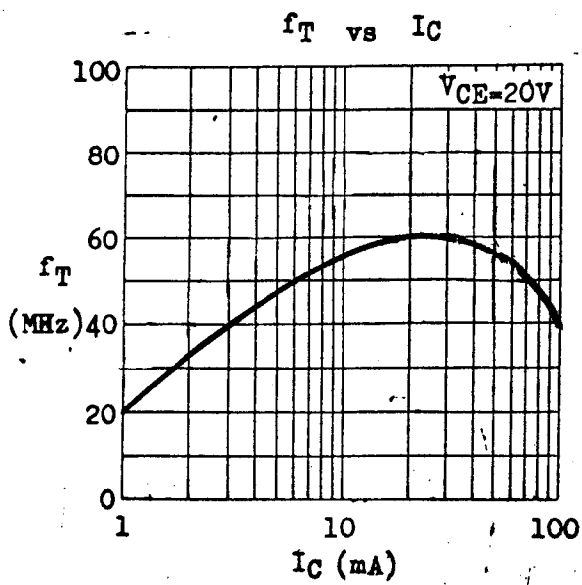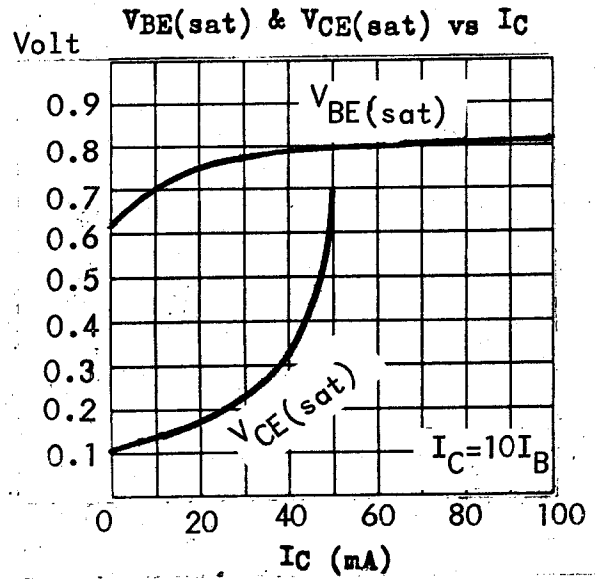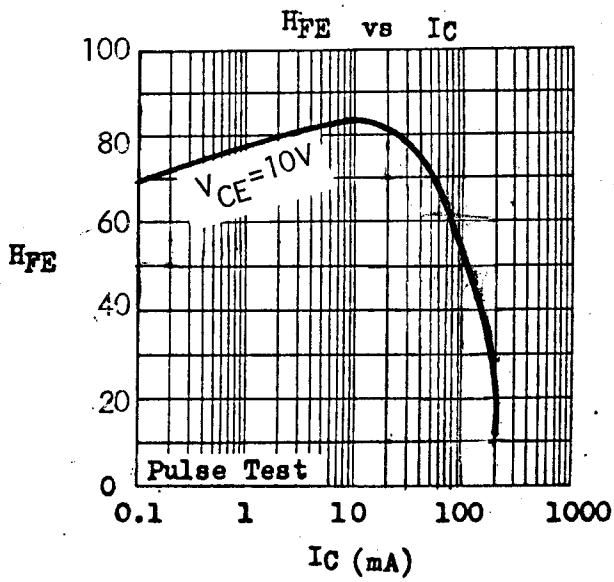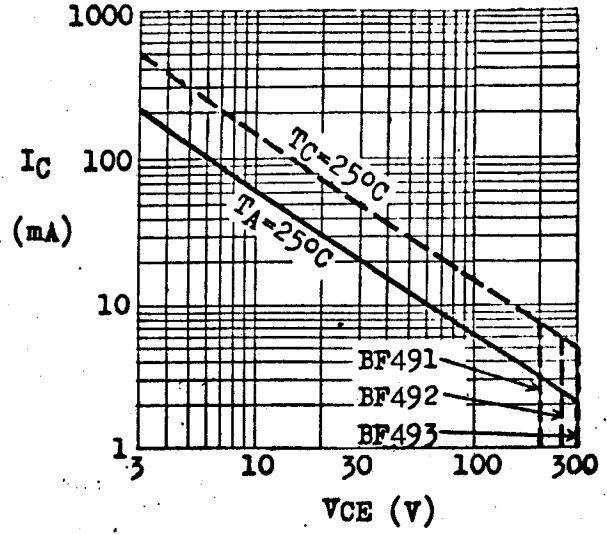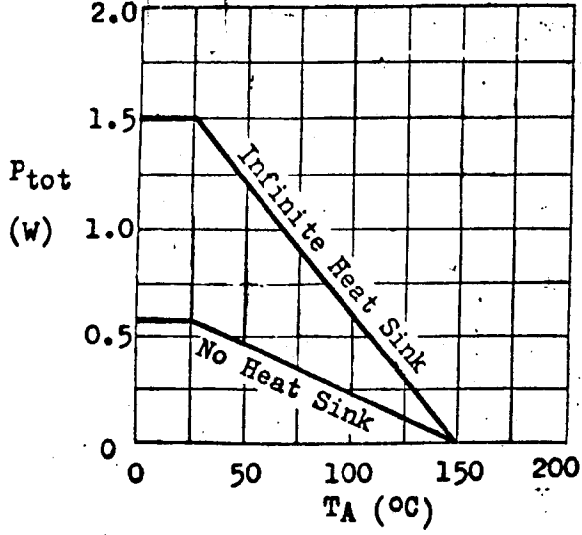



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.