



# 1 Amp Schottky Rectifier 5817SMG — 5819SMG

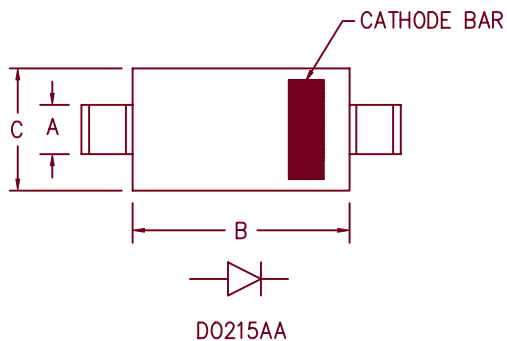

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.081	.087	2.06	2.21	
B	.160	.180	4.06	4.57	
C	.130	.155	3.30	3.94	
D	.077	.104	1.95	2.64	
E	.234	.256	5.95	6.50	

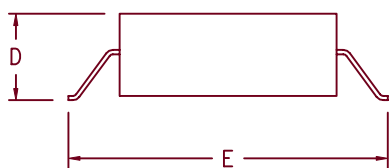

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
5817SMG	20V	20V
5818SMG	30V	30V
5819SMG	40V	40V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- High Reliability
- High Current Capability
- Surface mount package

## Electrical Characteristics

		5817SMG	5818SMG	5819SMG	
Average forward current	$I_F(AV)$	1A	1A	1A	Square wave $R_{\theta JL} = 30^\circ C/W$ 8.3ms, half sine, $T_J = 150^\circ C$ $I_{FM} = 0.1A, T_J = 25^\circ C^*$ $I_{FM} = 1.0A, T_J = 25^\circ C^*$ $I_{FM} = 3.0A, T_J = 25^\circ C^*$ $V_{RRM}, T_J = 25^\circ C$ $V_R = 5.0V, T_J = 25^\circ C$
Lead Temperature		136°C	133°C	133°C	
Maximum surge current	$I_{FSM}$	50A	50A	50A	
Max peak forward voltage	$V_{FM}$	.32V	.37V	.37V	
Max peak forward voltage	$V_{FM}$	.45V	.55V	.55V	
Max peak forward voltage	$V_{FM}$	.65V	.85V	.85V	
Max peak reverse current	$I_{RM}$	1mA	1mA	1mA	
Typical junction capacitance	$C_J$	105pF	50pF	50pF	

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range	$T_{STG}$	-55°C to 150°C
Operating junction temp range	$T_J$	-55°C to 150°C
Maximum thermal resistance	$R_{\theta JL}$	25°C/W Junction to Lead
Weight		.0047 ounces (.013 grams) typical

1-13-03 Rev. 2

# 5817SMG

Figure 1  
Typical Forward Characteristics

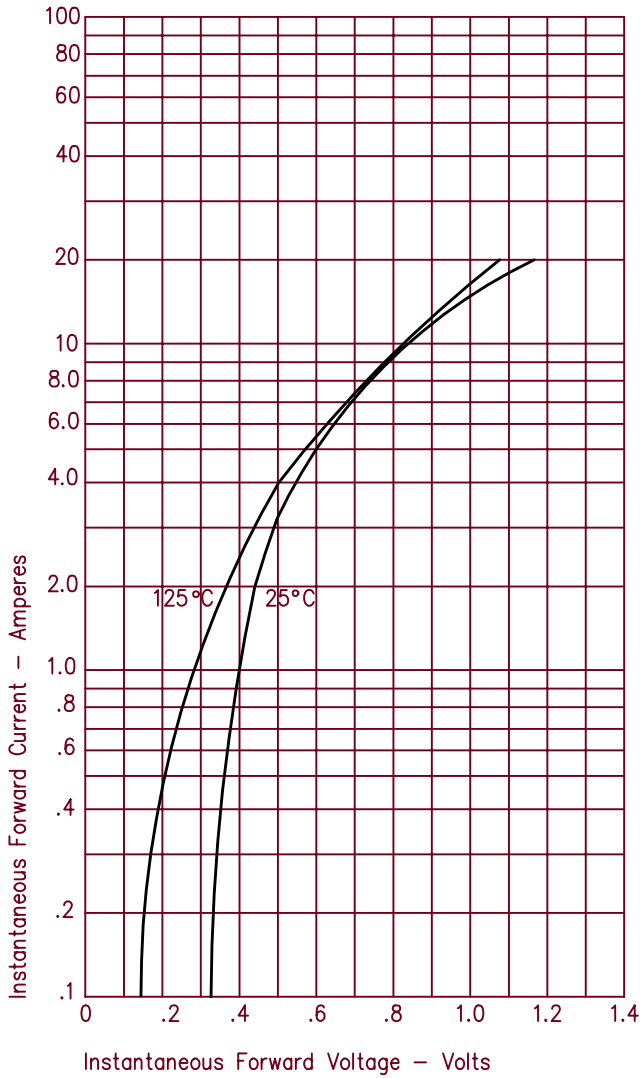


Figure 3  
Typical Junction Capacitance


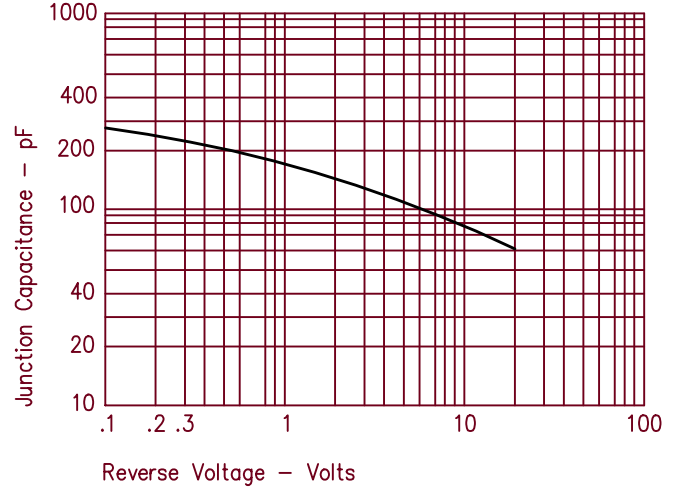


Figure 2  
Typical Reverse Characteristics

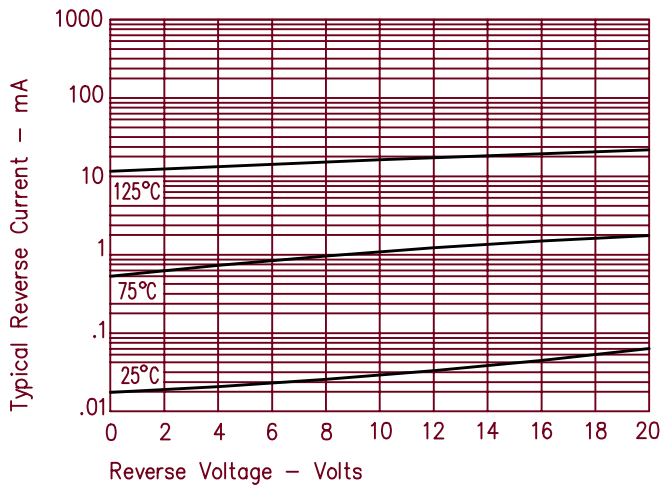

# 5818SMG & 5819SMG

Figure 1  
Typical Forward Characteristics

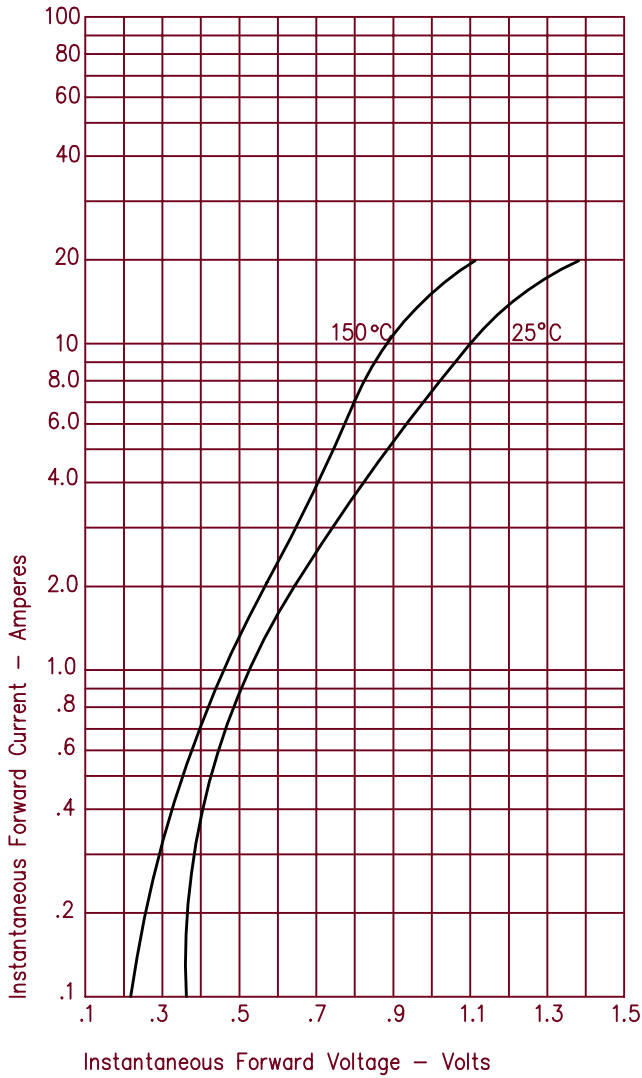


Figure 3  
Typical Junction Capacitance


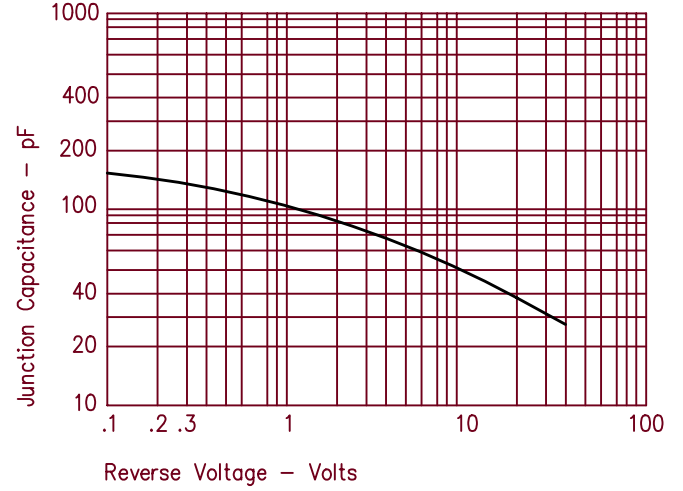


Figure 2  
Typical Reverse Characteristics



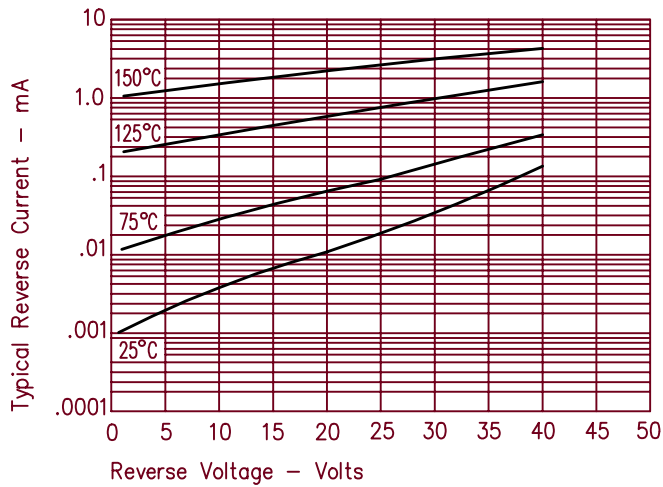

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.