



# 8 Amp Schottky Rectifier HSM880 — HSM8100

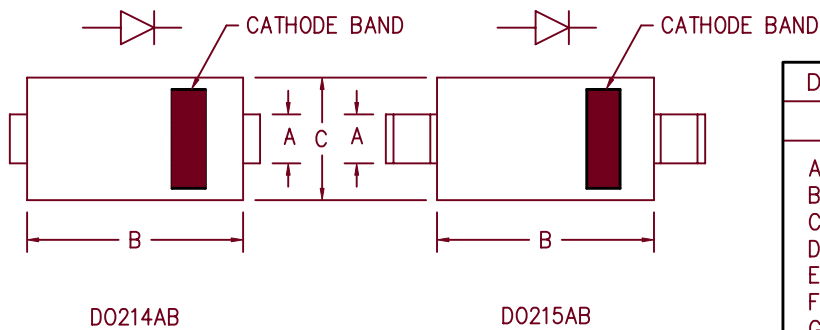

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.117	.123	2.97	3.12	
B	.260	.280	6.60	7.11	
C	.220	.245	5.59	6.22	
D	.307	.322	7.80	8.18	
E	.075	.095	1.91	2.41	
F	.380	.400	9.65	10.16	
G	.025	.040	.640	1.02	
H	.030	.060	.760	1.52	

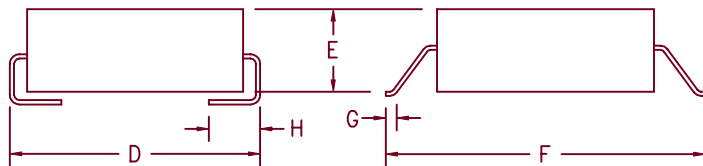

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HSM880*	SK88L	80V	80V
HSM890*		90V	90V
HSM8100*	SK810L	100V	100V

\*Add Suffix J For J Lead or G For Gull Wing Lead Configuration

- Schottky Barrier Rectifier
- Guard Ring Protection
- 175°C Junction Temperature
- High Current Capability
- VRRM 80 to 100 Volts
- Surface mount packages

## Electrical Characteristics

Average forward current	I <sub>F(AV)</sub> 8.0 Amps	Square wave
Maximum surge current	I <sub>F(AV)</sub> 300 Amps	8.3ms, half sine, T <sub>J</sub> = 175°C
Max peak forward voltage	V <sub>FM</sub> .61 Volts	I <sub>FM</sub> = 8.0A:T <sub>J</sub> = 175°C *
Max peak forward voltage	V <sub>FM</sub> .78 Volts	I <sub>FM</sub> = 8.0A:T <sub>J</sub> = 25°C *
Max peak reverse current	I <sub>RM</sub> 500 μA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance	C <sub>J</sub> 480pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\* Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 175°C
Maximum thermal resistance	R <sub>θJL</sub>	20°C/W Junction to lead
Weight		.008 ounces (.22 grams) typical

1-10-02 Rev. 3

# HSM880 — HSM8100

Figure 1  
Typical Forward Characteristics

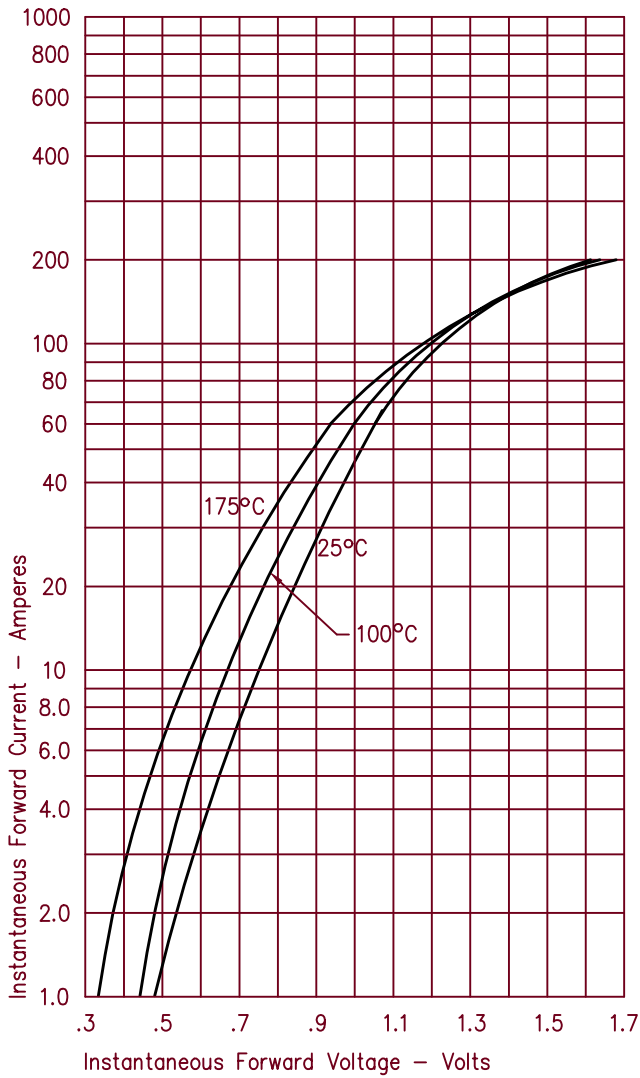


Figure 3  
Typical Junction Capacitance


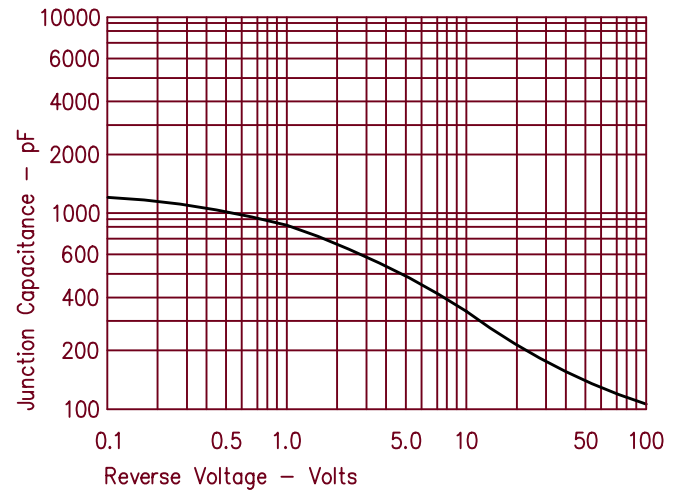


Figure 2  
Typical Reverse Characteristics



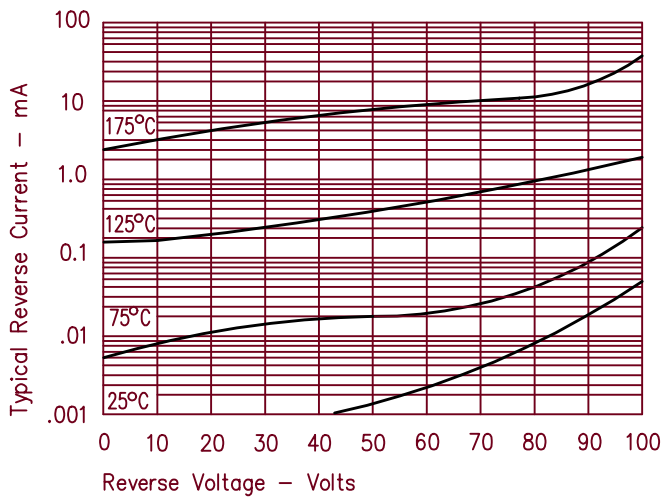

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.