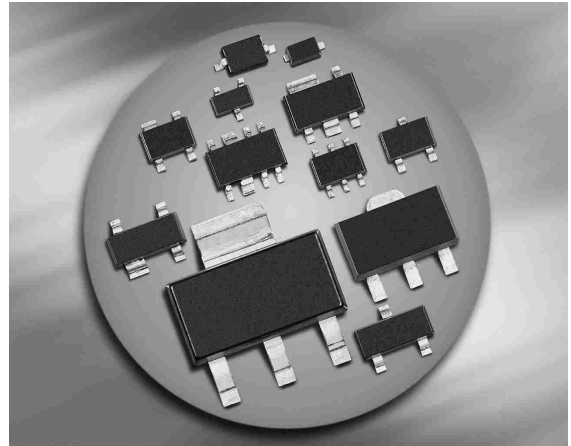



Silicon Variable Capacitance Diode

- For VHF tuned circuit applications
- High figure of merit


BB439


Type	Package	Configuration	L_S (nH)	Marking
BB439	SOD323	single	1.8	white 2

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	28	V
Peak reverse voltage ($R \geq 5\text{k}\Omega$)	V_{RM}	30	
Forward current	I_F	20	mA
Operating temperature range	T_{op}	-55 ... 125	°C
Storage temperature	T_{stg}	-55 ... 150	


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current $V_R = 28\text{ V}$ $V_R = 28\text{ V}, T_A = 85^\circ\text{C}$	I_R	- -	- -	20 200	nA
AC Characteristics					
Diode capacitance $V_R = 1\text{ V}, f = 1\text{ MHz}$ $V_R = 2\text{ V}, f = 1\text{ MHz}$ $V_R = 3\text{ V}, f = 1\text{ MHz}$ $V_R = 25\text{ V}, f = 1\text{ MHz}$	C_T	- 31.5 26.5 4.3	43 34.5 29 5.1	- 37.5 31.5 6	pF
Capacitance ratio $V_R = 2\text{ V}, V_R = 25\text{ V}, f = 1\text{ MHz}$	C_{T2}/C_{T25}	6	6.9	8	
Capacitance ratio $V_R = 3\text{ V}, V_R = 25\text{ V}, f = 1\text{ MHz}$	C_{T3}/C_{T25}	5	5.8	6.5	
Capacitance matching ¹⁾ $V_R = 3\text{ V}, V_R = 25\text{ V}, f = 1\text{ MHz}$	$\Delta C_T/C_T$	-	-	3	%
Series resistance $V_R = 10\text{ V}, f = 100\text{ MHz}$	r_S	-	0.35	0.5	Ω
Figure of merit $V_R = 3\text{ V}, f = 50\text{ MHz}$ $V_R = 25\text{ V}, f = 200\text{ MHz}$	Q	- -	280 600	- -	


¹For details please refer to Application Note 047.

Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

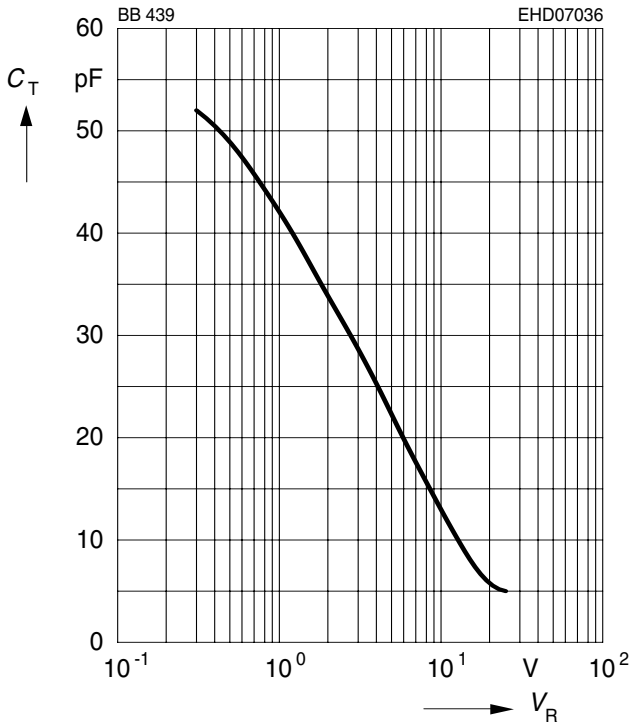

Temperature coefficient of the diode capacitance $T_{Cc} = f(V_R)$

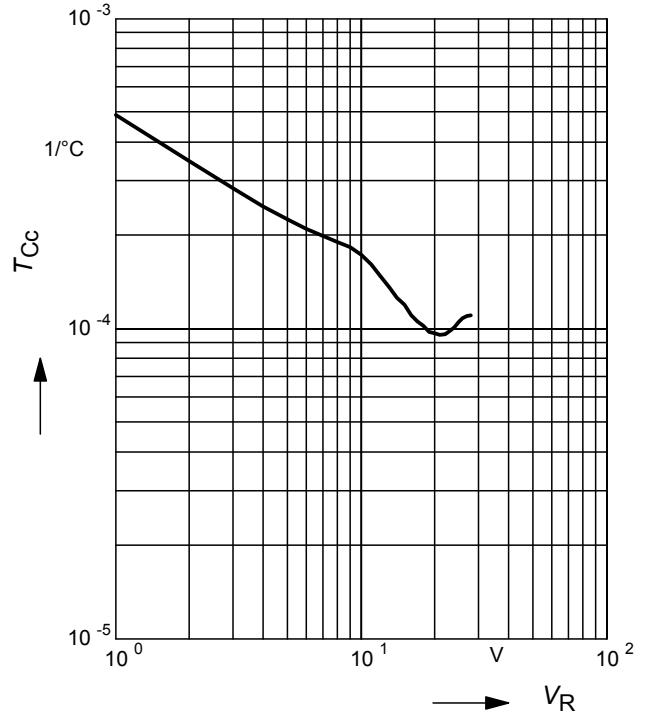



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.