Video signal switcher
BA7611AN / BA7611AF

The BA7611AN and BA7611AF are a three-channel analog multiplexers with built-in mute and a 6dB amplifier. The ICs designed for use in video cassette recorders. It features a large dynamic range and wide operating frequency range, and have sync-tip clamp inputs whitch are ideal for switching video signals.

●Applications

Video cassette recorders and televisions

●Features

1) 3-input / 1-output switches.
2) Built-in 6dB amplifier.
3) Built-in mute.
4) Sync-tip clamp inputs.
5) Wide operating supply voltage range (4.5V to 13.0V).
6) Low power consumption (50mW Typ.).
7) Excellent frequency characteristics (10MHz, 0dB Typ.).
8) Wide dynamic range (3.5V_{P-P} Typ.).
9) Low interchannel crosstalk (– 65dB Typ., f = 4.43MHz).

●Block diagram

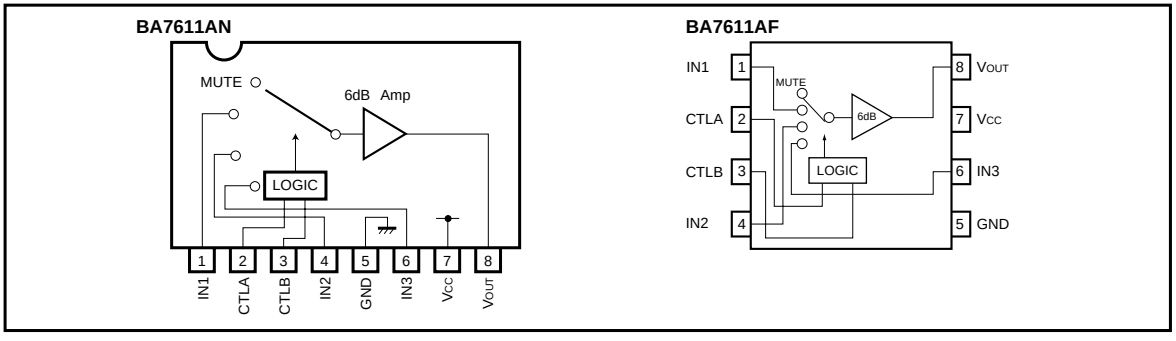

●Truth table

CTL - A	CTL - B	OUT
L (OPEN)	L (OPEN)	IN1
L (OPEN)	H	IN2
H	L (OPEN)	IN3
H	H	MUTE

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	13.5	V
Power dissipation	Pd	900*1 (SIP8) / 550*2 (SOP8)	mW
Operating temperature	Topr	– 25 ~ + 75	°C
Storage temperature	Tstg	– 55 ~ + 125	°C

*1 Reduced by 9mW for each increase in Ta of 1°C over 25°C.
*2 Reduced by 5.5mW for each increase in Ta of 1°C over 25°C.

●Equivalent circuits

CLAMP INPUT



OUTPUT

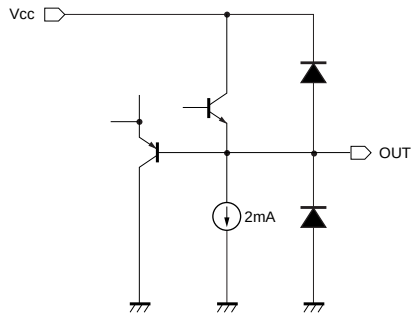

CTLa / CTLb

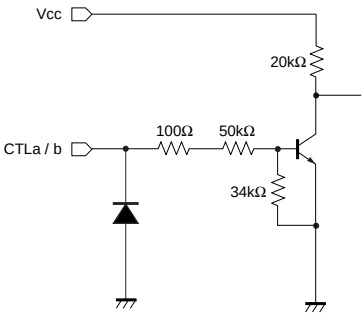

Note:
Input bias current 1µA [Typ.]
Output impedance 20Ω [Typ.]

●Electrical characteristics (unless otherwise noted, Ta = 25°C and V_{CC} = 5V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Operating voltage	V_{CC}	4.5	—	13.0	V	—	Fig.4
Supply current	I_{CC}	—	10.5	15.5	mA	—	Fig.4
Maximum output level	V_{om}	3.0	3.5	—	V_{P-P}	f = 1kHz, THD = 0.5%	Fig.4
Voltage gain	G_V	5.5	6.0	6.5	dB	f = 1MHz, V_{IN} = 1.0V_{P-P}	Fig.4
Interchannel crosstalk	C_T	—	– 65	—	dB	f = 4.43MHz, V_{IN} = 1.0V_{P-P}	Fig.4
Frequency characteristic	C_f	– 3.0	0	1.0	dB	f = 10MHz / 1MHz, V_{IN} = 1.0V_{P-P}	Fig.4
CTL pin switch level A	V_{TH-A}	1.0	2.0	3.0	V	—	Fig.4
CTL pin switch level B	V_{TH-B}	1.0	2.0	3.0	V	—	Fig.4

○Not designed for radiation resistance.

●Electrical characteristic curves

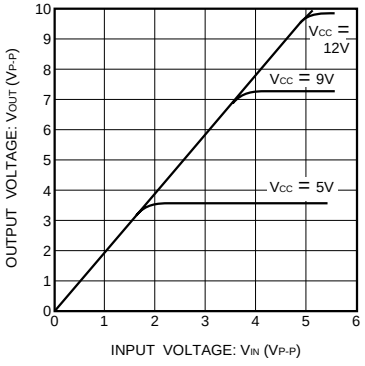

Fig. 1 V_{IN} vs. V_{OUT} (f = 1kHz)

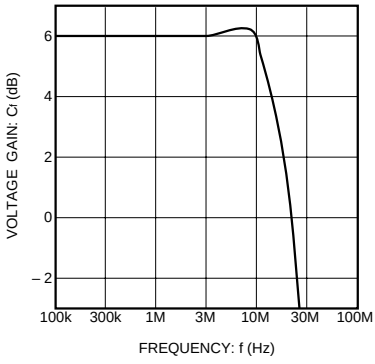

Fig. 2 Frequency characteristics

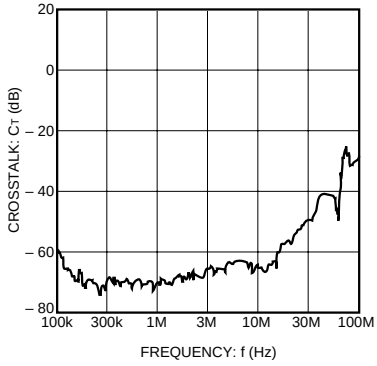

Fig. 3 Interchannel crosstalk

●Measurement circuit

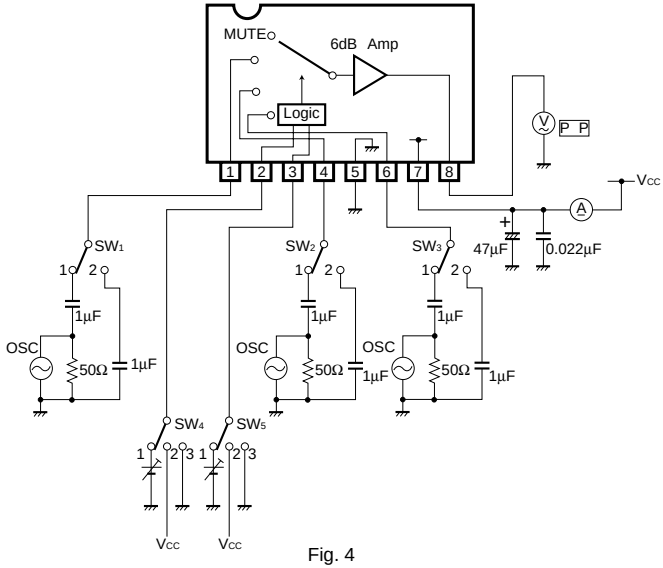

Fig. 4

●Measurement conditions

Parameter		Symbol	Switch settings					Measurement method
			SW_1	SW_2	SW_3	SW_4	SW_5	
Current dissipation		I_{CC}	2	2	2	2	2	Ammeter
Maximum output level	I_{N1}	V_{om}	1	2	2	3	3	f = 1kHz, THD = 0.5% ∗1
	I_{N2}	V_{om}	2	1	2	3	2	
	I_{N3}	V_{om}	2	2	1	2	3	
Voltage gain	I_{N1}	G_V	1	2	2	3	3	f = 1MHz, $V = 1V_{P-P}$ ∗2
	I_{N2}	G_V	2	1	2	3	2	
	I_{N3}	G_V	2	2	1	2	3	
Interchannel crosstalk	$I_{N1}\rightarrow I_{N2}$	C_T	1	2	2	3	2	f = 4.43MHz $V = 1V_{P-P}$ ∗3
	$I_{N1}\rightarrow I_{N3}$	C_T	1	2	2	2	3	
	$I_{N1}\rightarrow$MUTE	C_T	1	2	2	2	2	
	$I_{N2}\rightarrow I_{N3}$	C_T	2	1	2	2	3	
	$I_{N2}\rightarrow$MUTE	C_T	2	1	2	2	2	
	$I_{N3}\rightarrow$MUTE	C_T	2	2	1	2	2	
Frequency characteristic	I_{N1}	G_f	1	2	2	3	3	f = 10MHz f = 1MHz $V = 1V_{P-P}$ ∗4
	I_{N2}	G_f	2	1	2	3	2	
	I_{N3}	G_f	2	2	1	2	3	
CTL pin switching level	CTLa	V_{TH}	2	2	1	1	3	∗5
	CTLb	V_{TH}	2	1	2	3	1	

∗1: Connect a distortion meter to the output, and input a f = 1kHz sine wave. Adjust the input level until the output distortion is 0.5%. This output voltage at this time is the maximum output level V_{om} (V_{P-P}).
∗2: Input a $1V_{P-P}$, 1MHz sine wave. The voltage gain is given by $G_V = 20 \log (V_{OUT} / V_{IN})$.
∗3: Input a $1V_{P-P}$, 4.43MHz sine wave. The interchannel crosstalk is given by $C_T = 20 \log (V_{OUT} / V_{IN})$.
∗4: Input $1V_{P-P}$, 1MHz and 10MHz sine waves. The frequency characteristic is given by $G_f = 20 \log (V_{OUT}$ (f = 10MHz) / V_{OUT} (f = 1MHz)).
∗5: Input a $1V_{P-P}$, 1MHz sine wave. Reduce the CTL pin voltage from V_{CC}. The CTL pin switching level (V_{TH}) is the CTL pin voltage at which the V_{OUT} level drops below $20mV_{P-P}$.

●External dimensions (Units: mm)

BA7611AN



SIP8

BA7611AF

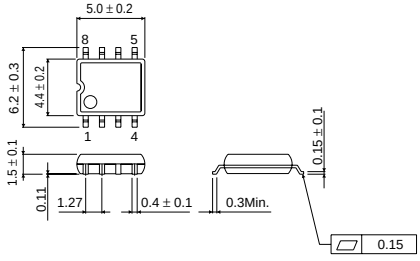

SOP8

littlediode
COMPONENTS FOR ALL

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.