


**NPN Silicon AF Power Transistor**

- For AF driver and output stages
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BDP952 ... BDP956 (PNP)

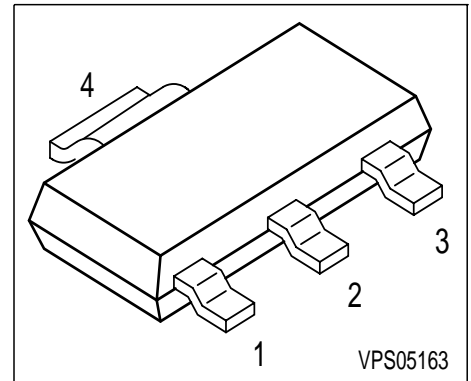

Type	Marking	Pin Configuration				Package
BDP951	BDP 951	1 = B	2 = C	3 = E	4 = C	SOT223
BDP953	BDP 953	1 = B	2 = C	3 = E	4 = C	SOT223
BDP955	PDP 955	1 = B	2 = C	3 = E	4 = C	SOT223

**Maximum Ratings**

Parameter	Symbol	BDP 951	BDP 953	BDP 955	Unit
Collector-emitter voltage	$V_{CEO}$	80	100	120	V
Collector-base voltage	$V_{CBO}$	100	120	140	
Emitter-base voltage	$V_{EBO}$	5	5	5	
DC collector current	$I_C$	3			A
Peak collector current	$I_{CM}$	5			
Base current	$I_B$	200			mA
Peak base current	$I_{BM}$	500			
Total power dissipation, $T_S = 99\text{ °C}$	$P_{tot}$	3			W
Junction temperature	$T_j$	150			°C
Storage temperature	$T_{stg}$	-65 ... 150			

**Thermal Resistance**

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	≤17	K/W
--	------------	-----	-----


<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 10\text{ mA}, I_B = 0$	$V_{(BR)CEO}$				V
BDP951		80	-	-	
BDP953		100	-	-	
BDP955		120	-	-	
Collector-base breakdown voltage $I_C = 100\ \mu\text{A}, I_B = 0$	$V_{(BR)CBO}$				
BDP951		100	-	-	
BDP953		120	-	-	
BDP955		140	-	-	
Emitter-base breakdown voltage $I_E = 10\ \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 100\text{ V}, I_E = 0$	$I_{CBO}$	-	-	100	nA
Collector cutoff current $V_{CB} = 100\text{ V}, I_E = 0, T_A = 150\ ^\circ\text{C}$	$I_{CBO}$	-	-	20	$\mu\text{A}$
Emitter cutoff current $V_{EB} = 4\text{ V}, I_C = 0$	$I_{EBO}$	-	-	100	nA
DC current gain 1) $I_C = 10\text{ mA}, V_{CE} = 5\text{ V}$ $I_C = 500\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 2\text{ A}, V_{CE} = 2\text{ V}$	$h_{FE}$	25 40 15	- - -	- 475 -	-
Collector-emitter saturation voltage 1) $I_C = 2\text{ A}, I_B = 0.2\text{ A}$	$V_{CEsat}$	-	-	0.8	V
Base-emitter saturation voltage 1) $I_C = 2\text{ A}, I_B = 0.2\text{ A}$	$V_{BEsat}$	-	-	1.5	
<b>AC Characteristics</b>					
Transition frequency $I_C = 50\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$	$f_T$	-	100	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	$C_{cb}$	-	25	-	pF

 1) Pulse test:  $t \leq 300\ \mu\text{s}$ ,  $D = 2\%$

Total power dissipation  $P_{tot} = f(T_S)$

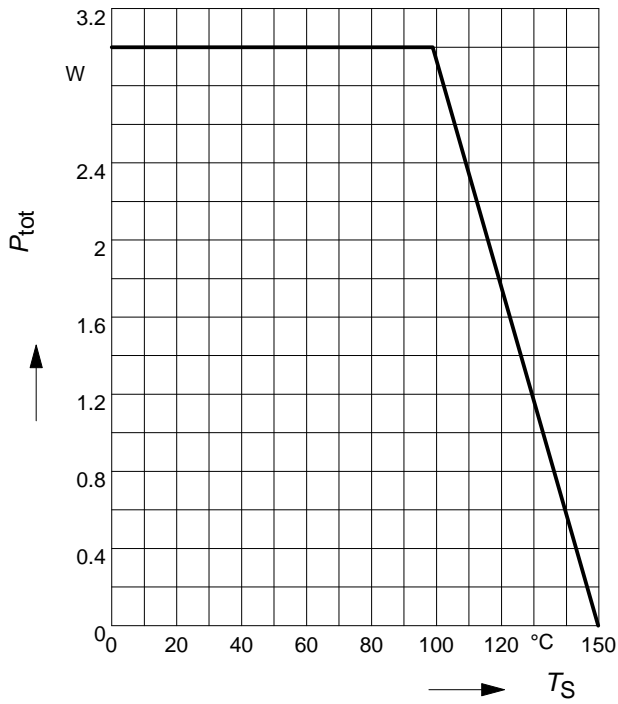


Permissible Pulse Load  $R_{thJS} = f(t_p)$

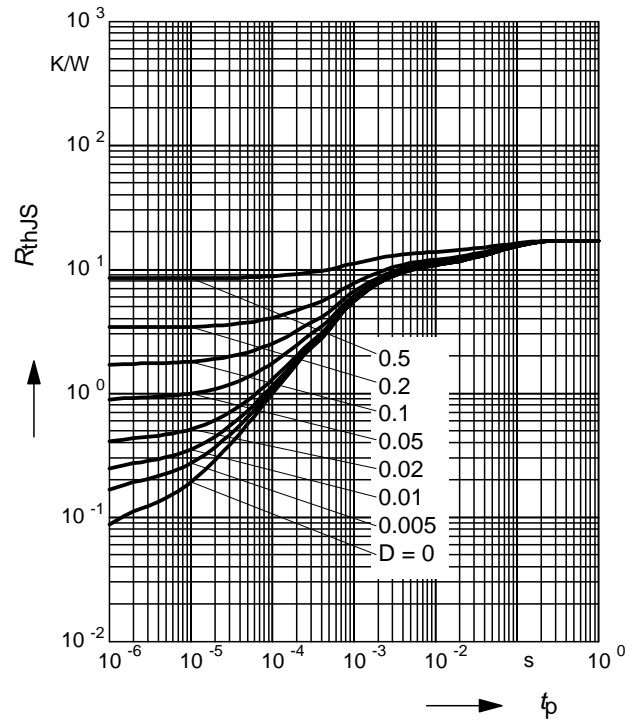


Permissible Pulse Load

$$P_{totmax} / P_{totDC} = f(t_p)$$

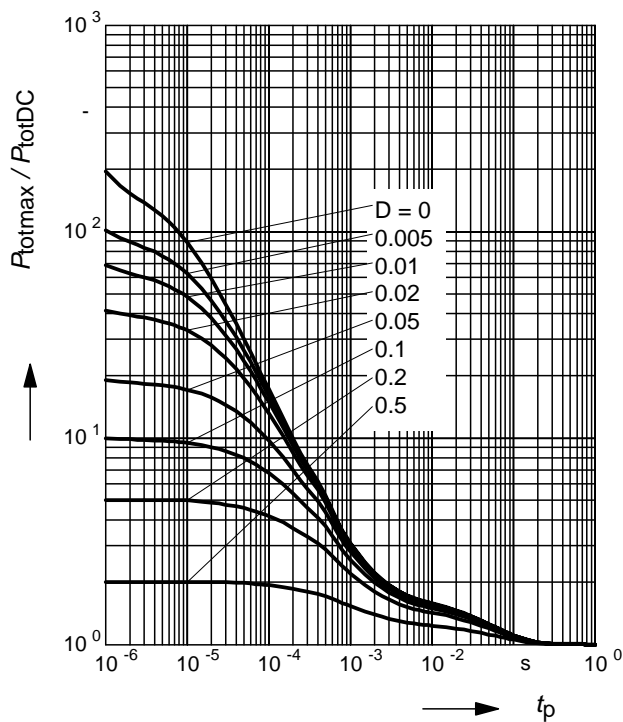


DC current gain  $h_{FE} = f(I_C)$

$$V_{CE} = 2V$$

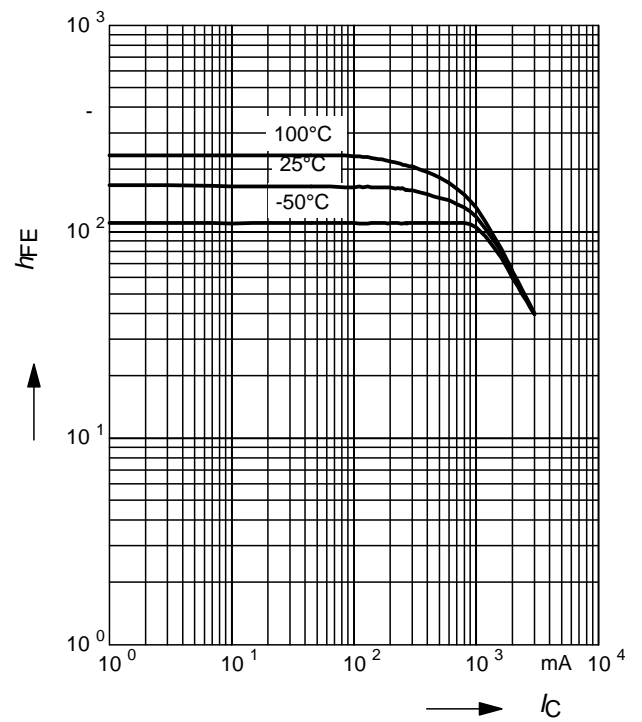


**Collector cutoff current  $I_{CBO} = f(T_A)$**

$V_{CB} = 45V$

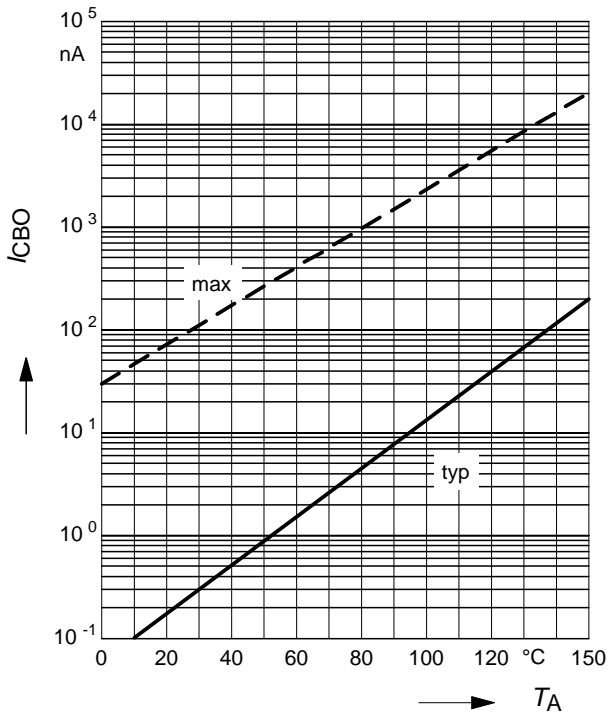


**Collector-emitter saturation voltage**

$I_C = f(V_{CEsat}), h_{FE} = 10$

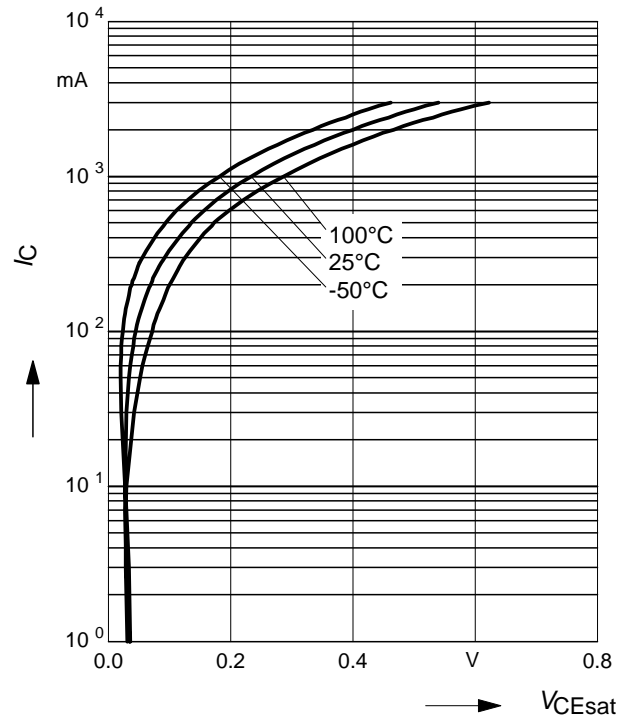


**Base-emitter saturation voltage**

$I_C = f(V_{BEsat}), h_{FE} = 10$

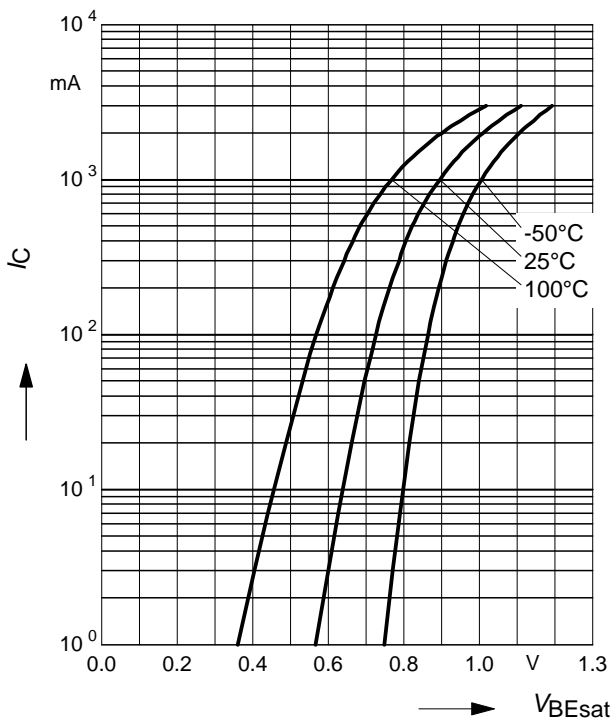

**Collector current  $I_C = f(V_{BE})$**

$V_{CE} = 2V$

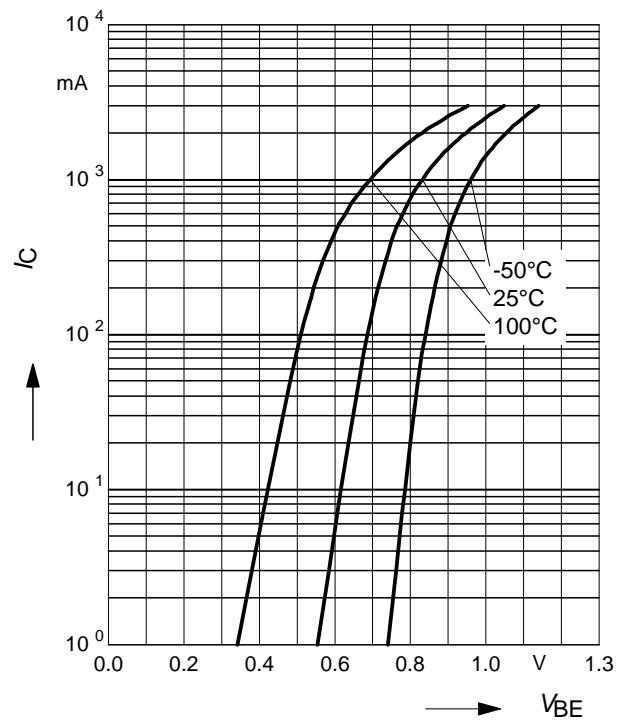



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.