


Signal processor LSI with anti-shock memory controller for CD players

BU9534KV

● Description

BU9534KV is a digital signal processor LSI with built-in pre-servo amplifier, and anti-shock memory controller developed for CD players. This pre-servo amplifier is applied to CD-RW disc. Approximately 180sec. music data can be stored in memory by connecting with 64M bit SDRAM.

● Dimension (Units : mm)

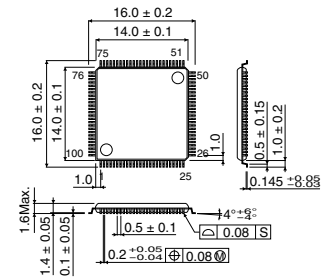

VQFP100

● Features

- 1) Anti-shock memory controller corresponds to EDRAM, and SDRAM. Maximum 180sec. of music data can be stored by using 4bit compression mode and 64bit SDRAM.
- 2) Built-in pre-servo amplifier for playing CD-RW
- 3) Tracking, Focus automatic control
- 4) Built-in wide PLL, CLV
- 5) Symmetry correction function
- 6) Built-in x8 over sampling filter + 1bit DAC
- 7) Digital bass boost, soft mute function

● Applications

Portable CD players

● Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Maximum applied voltage	Vcc	4.5	V
Power dissipation	Pd	1000	mW
Operating temperature range	Topr	-25 ~ 75	°C
Storage temperature range	Tstg	-55 ~ 125	°C

Derating : 10mW/°C for operation above Ta=25°C


● Recommended Operating Conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating power supply voltage	V _{DD}	2.5	—	3.3	V

● Electrical characteristics (Unless otherwise noted; Ta=25°C, V_{CC}=3.0V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current	I _o	—	28	35	mA	
Audio-DAC distortion	THD	—	0.01	—	%	0dB, 1KHz
Audio-DAC range	DR	—	90	—	dB	-60dB, 1KHz
Audio-DAC S/N rate	S/N	—	96	—	dB	
Servo-ADC Max. conversion voltage	V _{ADH}	1.0	1.2	1.4	V	
Servo-ADC Min. conversion voltage	V _{ADL}	-1.4	-1.2	-1.0	V	
Servo-ADC Max. output voltage	V _{ADH}	0.8	1.2	—	V	
Servo-ADC Min. output voltage	V _{ADL}	—	-1.2	-0.8	V	
RF amplifier Max. output amplitude	V _{RFH}	1.1	1.3	—	V	
RF amplifier Min. output amplitude	V _{RFL}	—	-1.3	-1.1	V	

● Application Circuit

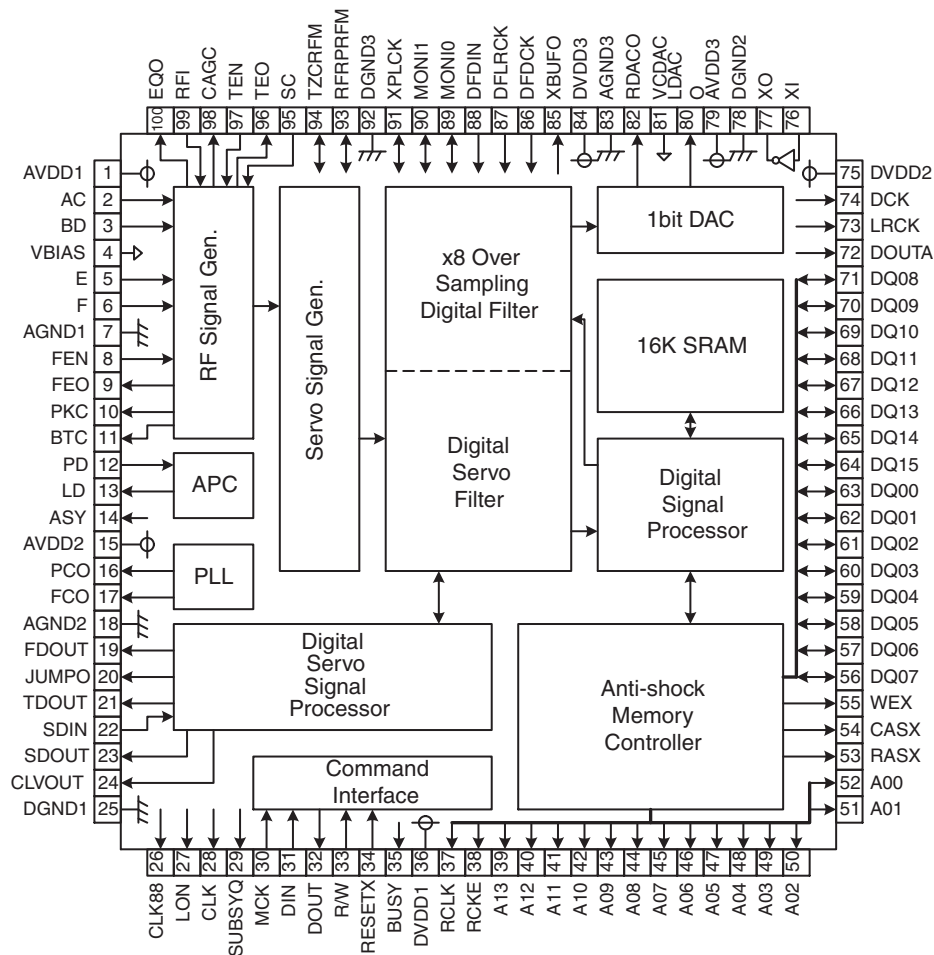



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.