

Current Transducer HNC- 050 .. 100P

$$I_{PN} = 50 \dots 100 \text{ A}$$

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data		
Primary nominal DC current	Primary current measuring range	Type
I_{PN} (A)	I_p (A)	
50	0 .. ± 75	HNC - 050P
100	0 .. ± 140	HNC - 100P

		HNC - 050P	HNC - 100P	
R_M	Measuring resistance	60 .. 90	60 .. 80	Ω
I_{SN}	Second nominal current	50	50	mA
K_N	Turns ratio	1 : 1000	1 : 2000	
V_C	Supply voltage ($\pm 5\%$)		± 15	V
I_C	Current consumption		$15 + I_{SN}$	mA
V_d	R.m.s. voltage for AC isolation test, 50/60Hz, 1 min		2.5	kV

Features

- Hall effect measuring principle
- Galvanic isolation between primary and secondary circuit
- Isolation voltage 2500 V
- Low power consumption

Accuracy-Dynamic performance data		
X	Accuracy @ $T_A = 25^\circ\text{C}$	± 1 % of I_{PN}
e_L	Linearity (0 .. $\pm I_{PN}$)	$< \pm 0.5$ %
I_O	Electrical offset current @ $I_p = 0$, @ $T_A = 25^\circ\text{C}$	± 0.2 mA
I_{HC}	Hysteresis offset current @ $I_p = 0$, after an excursion of I_{PN}	± 0.15 mA
I_{OT}	Thermal drift of I_O 0°C .. +70°C	± 0.005 ms/°C
t_r	Response time @ 90% of I_p	< 1 μs
TCE_G	Thermal drift of the gain (% of reading)	$< \pm 0.004$ %/°C

Advantages


- Easy mounting
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference

Applications

- DC motor drives
- Switched Mode Power Supplies (SMPS)
- AC variable speed drives
- Uninterruptible Power Supplies (UPS)
- Battery supplied applications
- Inverters

General data		
T_A	Ambient operating temperature	- 10 .. + 80 °C
T_S	Ambient storage temperature	- 15 .. + 85 °C
R_S	Secondary coil Resistance @ $T_A = 25^\circ\text{C}$	HNC - 200P HNC - 300P
		75 95 Ω
m	Mass	30 g

HNC- 050 .. 100P

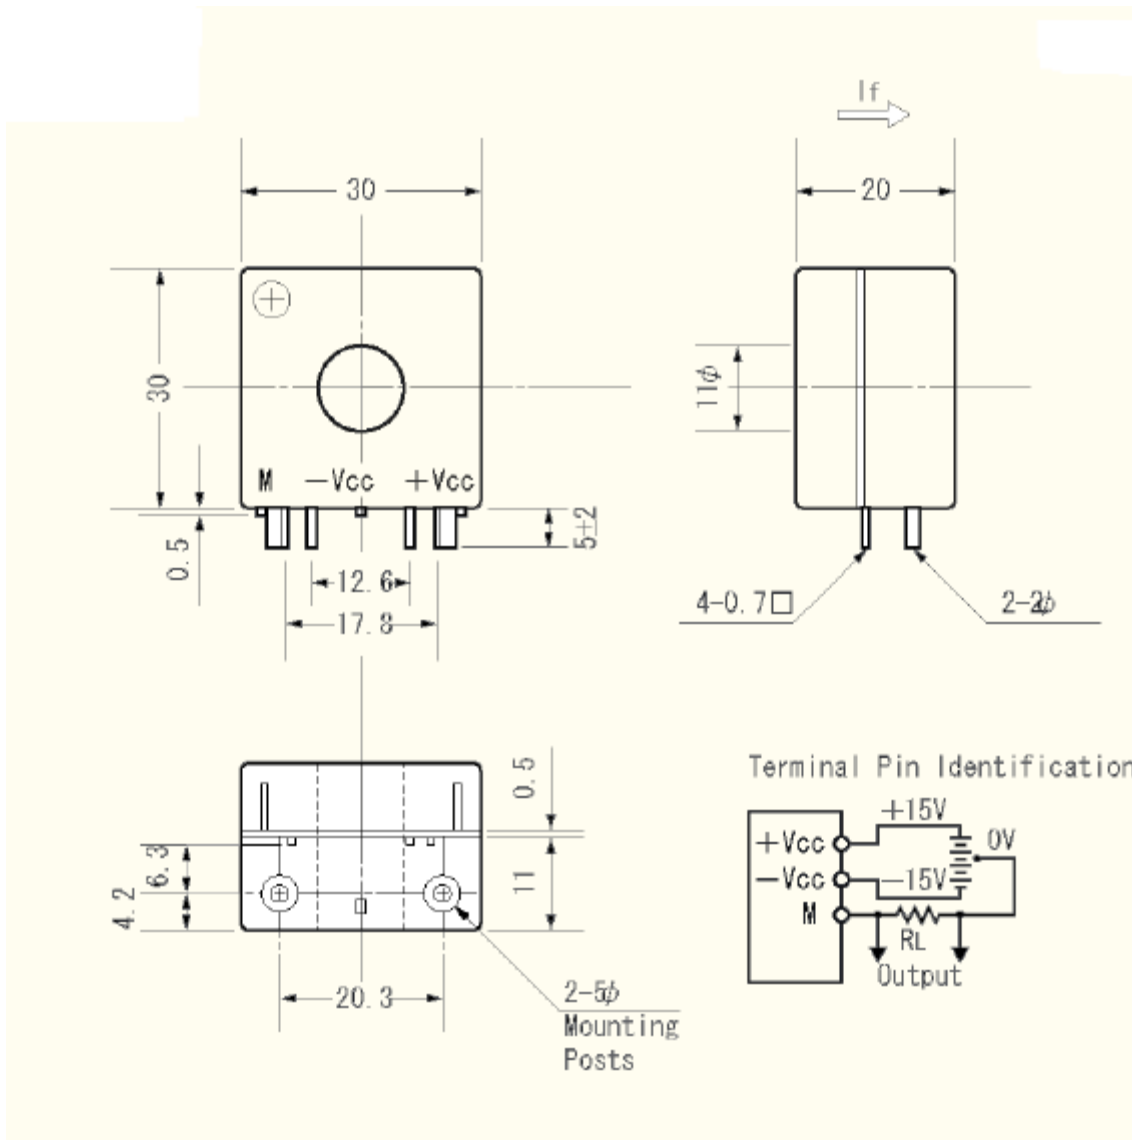

UNIT: mm



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.