

Digital transistor (built-in resistor)

DTC125TUA / DTC125TKA / DTC125TSA

●Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors.
- 2) The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input, and parasitic effects are almost completely eliminated.
- 3) Only the on / off conditions need to be set for operation, making device design easy.
- 4) Higher mounting densities can be achieved.


●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V _{CE0}	50	V
Collector-emitter voltage	V _{CE0}	50	V
Emitter-base voltage	V _{EB0}	5	V
Collector current	I _c	100	mA
Collector power dissipation	P _c	200 300	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 ~ +150	°C

●Package, marking, and packaging specifications

Part No.	DTC125TUA	DTC125TKA	DTC125TSA
Package	UMT3	SMT3	SPT
Marking	0A	0A	-
Packaging code	T106	T146	TP
Basic ordering unit (pieces)	3000	3000	5000

●External dimensions (Units : mm)

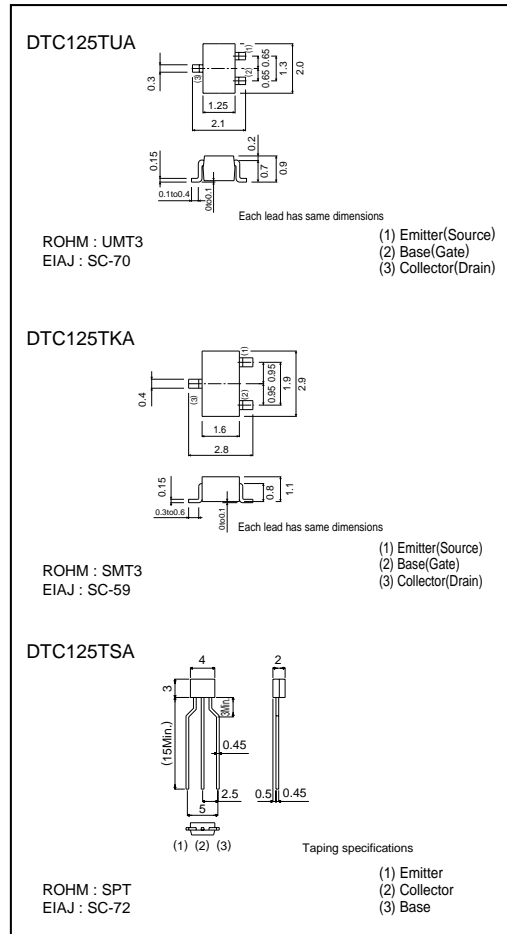


●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CE0}	50	-	-	V	I _c = 50μA
Collector-emitter breakdown voltage	BV _{CE0}	50	-	-	V	I _c = 1mA
Emitter-base breakdown voltage	BV _{EB0}	5	-	-	V	I _E = 50μA
Collector cutoff current	I _{CB0}	-	-	0.5	μA	V _{CB} = 50V
Emitter cutoff current	I _{EB0}	-	-	0.5	μA	V _{EB} = 4V
Collector-emitter saturation voltage	V _{CE(sat)}	-	-	0.3	V	I _c = 0.5mA, I _B = 0.05mA
DC current transfer ratio	h _{FE}	100	250	600	-	I _c = 1mA, V _{CE} = 5V
Input resistance	R ₁	140	200	260	kΩ	-
Transition frequency	f _T	-	250	-	MHz	V _{CE} = 10V, I _E = -5mA, f = 100MHz *

* Transition frequency of the device.

●Circuit schematic

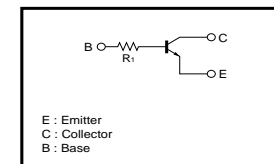

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.