

IPS042G

DUAL FULLY PROTECTED POWER MOSFET SWITCH

Features

- Over temperature shutdown
- Over current shutdown
- Active clamp
- Low current & logic level input
- E.S.D protection


Description

The IPS042G is a fully protected dual low side SMART POWER MOSFET that features over-current, over-temperature, ESD protection and drain to source active clamp. This device combines a HEXFET® POWER MOSFET and a gate driver. It offers full protection and high reliability required in harsh environments. The driver allows short switching times and provides efficient protection by turning OFF the power MOSFET when the temperature exceeds 165°C or when the drain current reaches 2A. This device restarts once the input is cycled. The avalanche capability is significantly enhanced by the active clamp and covers most inductive load demagnetizations.

Product Summary


| | |
|------------------|-------------|
| $R_{ds(on)}$ | 500mΩ (max) |
| V_{clamp} | 50V |
| $I_{shutdown}$ | 2A |
| T_{on}/T_{off} | 1.5μs |

Package



8-Lead SOIC

Typical Connection

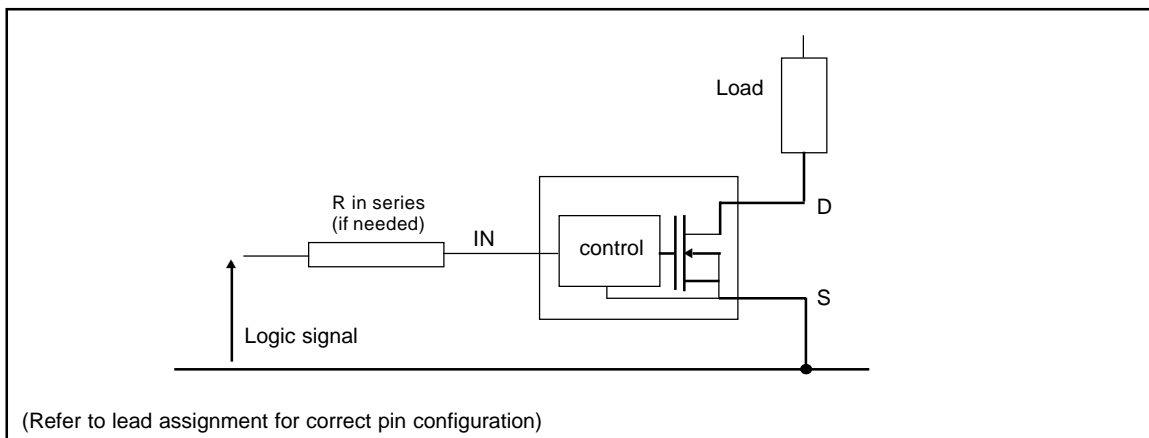

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are referenced to SOURCE lead. (T_{Ambient} = 25°C unless otherwise specified). PCB mounting uses the standard footprint with 70 μm copper thickness.

| Symbol | Parameter | Min. | Max. | Units | Test Conditions |
|------------------------|---|------|------|-------|-----------------------|
| V _{ds} | Maximum drain to source voltage | — | 47 | V | |
| V _{in} | Maximum input voltage | -0.3 | 7 | | |
| I _{in, max} | Maximum IN current | -10 | +10 | mA | |
| I _{sd cont.} | Diode max. continuous current ⁽¹⁾ (for all I _{sd} mosfets, r _{th} =125°C/W) | — | 1.2 | A | |
| I _{sd pulsed} | Diode max. pulsed current ⁽¹⁾ | — | 3 | | |
| P _d | Maximum power dissipation ⁽¹⁾ (for all P _d mosfets, r _{th} =125°C/W) | — | 1 | W | |
| ESD1 | Electrostatic discharge voltage (Human Body) | — | 4 | kV | C=100pF, R=1500Ω, |
| ESD2 | Electrostatic discharge voltage (Machine Model) | — | 0.5 | | C=200pF, R=0Ω, L=10μH |
| T _{stor.} | Max. storage temperature | -55 | 150 | °C | |
| T _{j max.} | Max. junction temperature | -40 | +150 | | |

Thermal Characteristics

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|------------------|---|------|------|------|-------|-----------------|
| R _{th1} | Thermal resistance with standard footprint (2 mosfets on) | — | 100 | — | °C/W | |
| R _{th2} | Thermal resistance with standard footprint (1 mosfet on) | — | 125 | — | | |
| R _{th3} | Thermal resistance with 1" square footprint (2 mosfets on) | — | 65 | — | | |

Recommended Operating Conditions

These values are given for a quick design. For operation outside these conditions, please consult the application notes.

| Symbol | Parameter | Min. | Max. | Units |
|-----------------------------------|--|------|------|-------|
| V _{ds (max)} | Continuous Drain to Source voltage | — | 35 | V |
| V _{IH} | High level input voltage | 4 | 6 | |
| V _{IL} | Low level input voltage | 0 | 0.5 | |
| I _{ds} | Continuous drain current (both mosfets at this current) T _{amb} =85°C, T _{Ambient} = 85°C, I _N = 5V, r _{th} = 100°C/W, T _j = 125°C | — | 0.53 | A |
| R _{in} | Recommended resistor in series with IN pin | 1 | 5 | kΩ |
| T _{r-in(max)} | Max recommended rise time for IN signal (see fig. 2) | — | 1 | μS |
| F _{r-Isc} ⁽²⁾ | Max. frequency in short circuit condition (V _{cc} = 14V) | 0 | 1 | kHz |

(1) Limited by junction temperature (pulsed current limited also by internal wiring)

(2) Operations at higher switching frequencies is possible. See Appl. notes.

Static Electrical Characteristics

(T_j = 25°C unless otherwise specified.)

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions | |
|--|---------------------------------|------------------------|------|------|-------|---|--|
| R _{ds(on)} | ON state resistance | T _j = 25°C | — | 370 | 500 | mΩ | V _{in} = 5V, I _{ds} = 1A |
| | | T _j = 150°C | — | 590 | 900 | | |
| I _{dss1} @T _j =25°C | Drain to source leakage current | 0 | 0.5 | 25 | μA | V _{CC} = 14V, T _j = 25°C | |
| I _{dss2} @T _j =25°C | Drain to source leakage current | 0 | 5 | 50 | | V _{CC} = 40V, T _j = 25°C | |
| V _{clamp 1} | Drain to Source clamp voltage 1 | 47 | 52 | 56 | V | I _d = 20mA (see Fig.3 & 4) | |
| V _{clamp 2} | Drain to Source clamp voltage 2 | 50 | 53 | 60 | | I _d =I _{shutdown} (see Fig.3 & 4) | |
| V _{in clamp} | IN to Source clamp voltage | 7 | 8.1 | 9.5 | | I _{in} = 1 mA | |
| V _{in th} | IN threshold voltage | 1 | 1.6 | 2 | | I _d = 50mA, V _{ds} = 14V | |
| I _{in, -on} | ON state IN positive current | 25 | 90 | 200 | μA | V _{in} = 5V | |
| I _{in, -off} | OFF state IN positive current | 50 | 130 | 250 | | V _{in} = 5V over-current triggered | |

Switching Electrical Characteristics

V_{CC} = 14V, Resistive Load = 20Ω, R_{input} = 1kΩ, 100μs pulse, T_j = 25°C, (unless otherwise specified).

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|------------------|--|------|------|------|-------|----------------------|
| T _{on} | Turn-on delay time | 0.05 | 0.2 | 0.5 | μs | See figure 2 |
| T _r | Rise time | 0.5 | 1.3 | 2.5 | | |
| T _{rf} | Time to 130% final R _{ds(on)} | — | 5 | — | | |
| T _{off} | Turn-off delay time | 0.5 | 1.6 | 2.5 | | See figure 2 |
| T _f | Fall time | 0.5 | 1.5 | 2.5 | | |
| Q _{in} | Total gate charge | — | 1 | — | nC | V _{in} = 5V |


Protection Characteristics

| Symbol | Parameter | Min. | Typ. | Max. | Units | Test Conditions |
|--------------------|---|------|------|------|-------|---|
| T _{sd} | Over temperature threshold | — | 165 | — | °C | See fig. 1 |
| I _{sd} | Over current threshold | 1.1 | 1.7 | 2.2 | A | See fig. 1 |
| V _{reset} | IN protection reset threshold | 1.5 | 2.3 | 3 | V | |
| T _{reset} | Time to reset protection | 2 | 10 | 40 | μs | V _{in} = 0V, T _j = 25°C |
| EOI_OT | Short circuit energy (see application note) | — | 400 | — | μJ | V _{CC} = 14V |


IPS042G

Functional Block Diagram

All values are typical

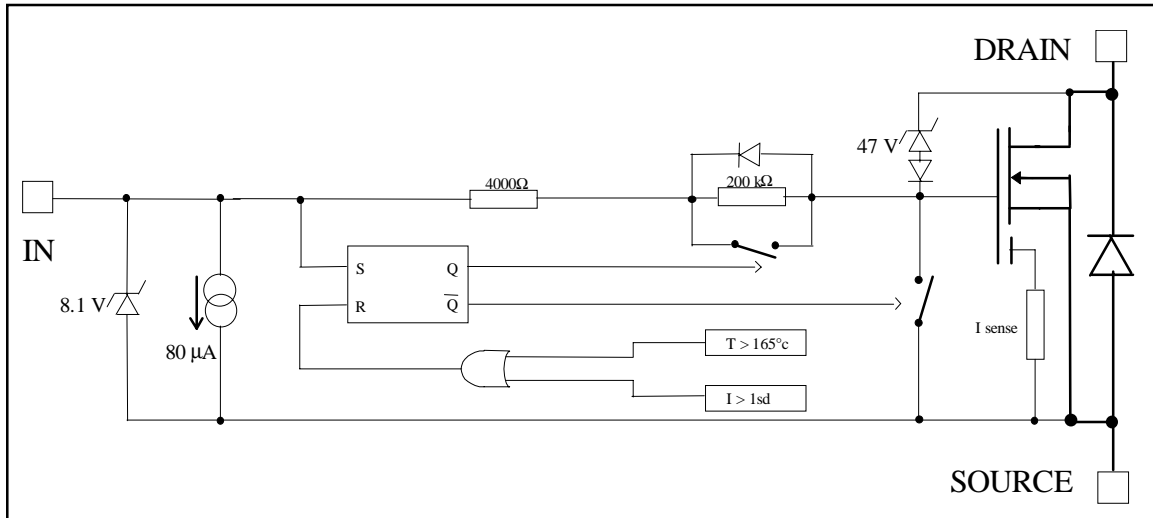

Lead Assignments

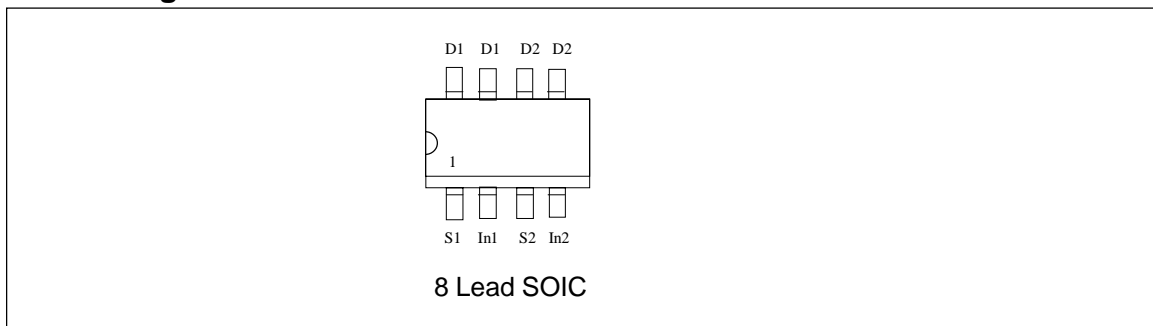

All curves are typical values with standard footprints. Operating in the shaded area is not recommended.

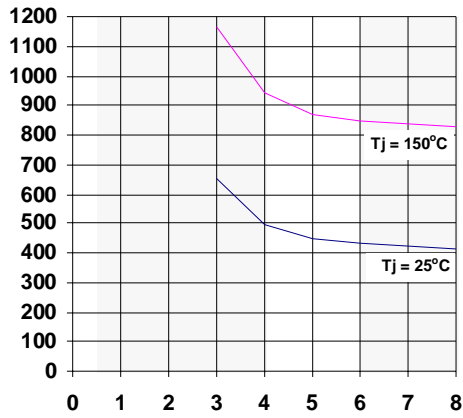


Figure 5 - Rds ON (mΩ) Vs Input Voltage (V)

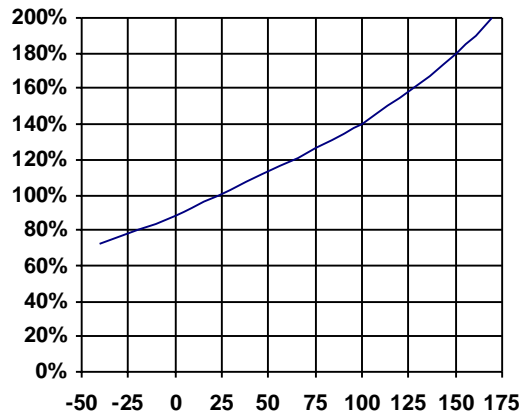


Figure 6 - Normalised Rds ON (%) Vs Tj (°C)

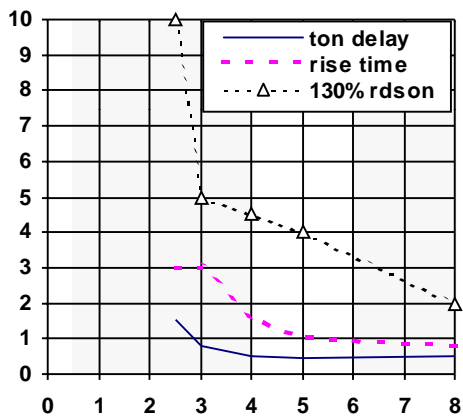


Figure 7 - Turn-ON Delay Time, Rise Time & Time to 130% final Rds(on) (us) Vs Input Voltage (V)

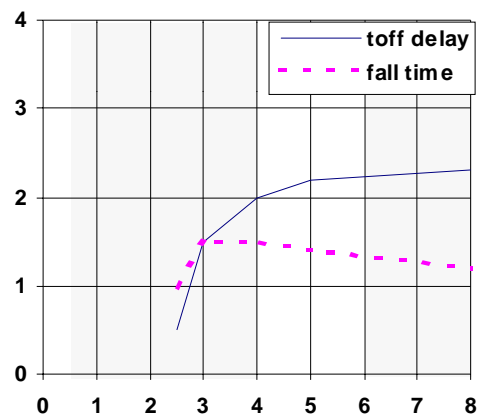


Figure 8 - Turn-OFF Delay Time & Fall Time (us) Vs Input Voltage (V)

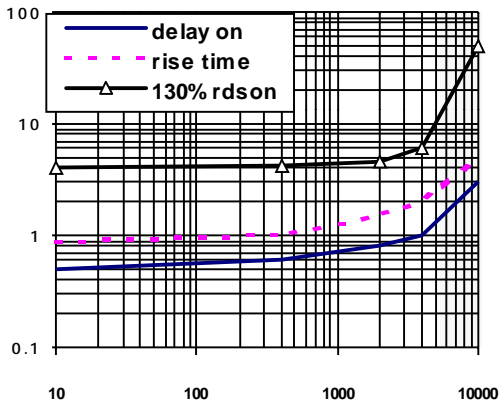


Figure 9 - Turn-ON Delay Time, Rise Time & Time to 130% final Rds(on) (us) Vs IN Resistor (Ω)

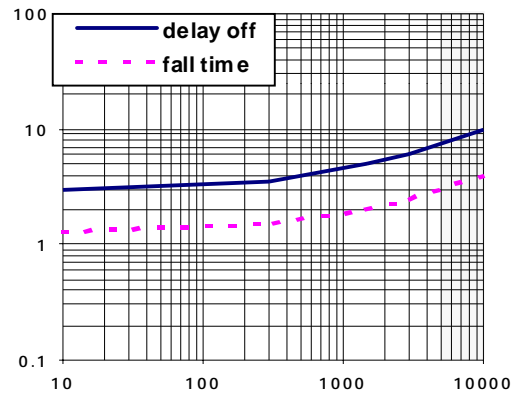


Figure 10 - Turn-OFF Delay Time & Fall Time (us) Vs IN Resistor (Ω)

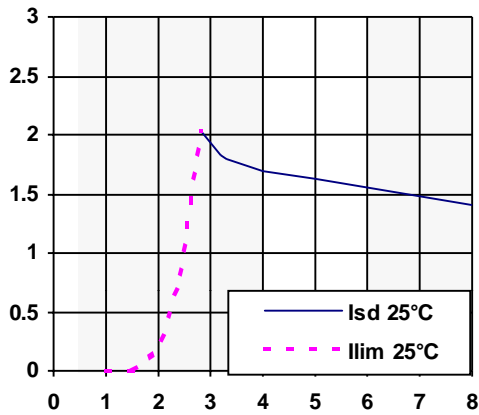


Figure 11 - Current lim. & I shutdown (A) Vs Vin (V)

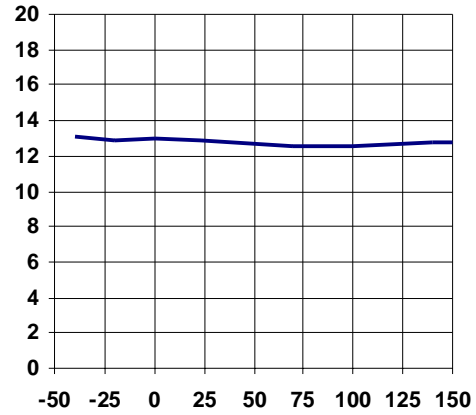


Figure 12 - I shutdown (A) Vs Temperature (°C)

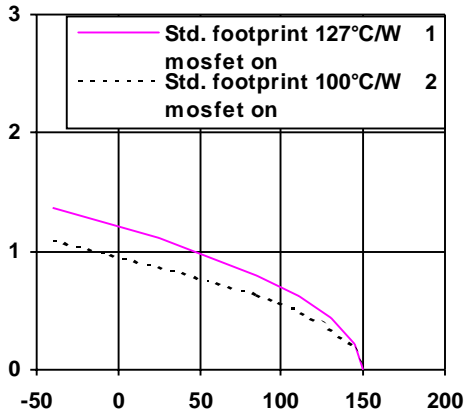


Figure 13 - Max.Cont. Ids (A) Vs Amb. Temperature (°C)

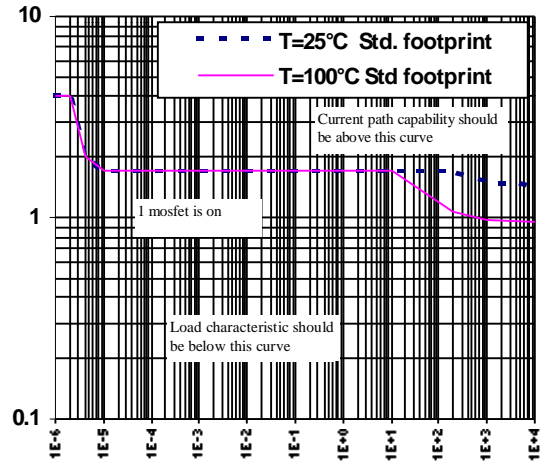


Figure 14 - Ids (A) Vs Protection Resp. Time (s)

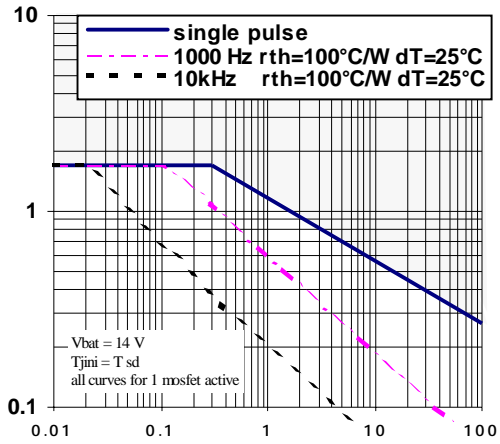


Figure 15 - Iclamp (A) Vs Inductive Load (mH)

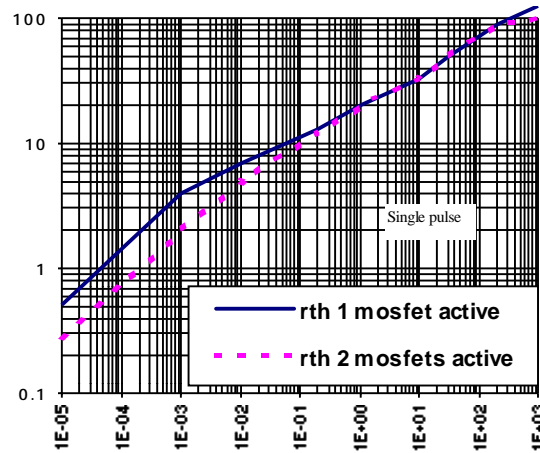


Figure 16 - Transient Thermal Imped. (°C/W) Vs Time (s)

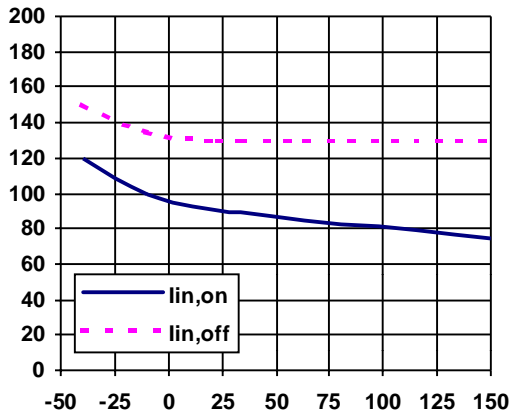


Figure 17 - Input current (μA) Vs T_j ($^{\circ}\text{C}$)

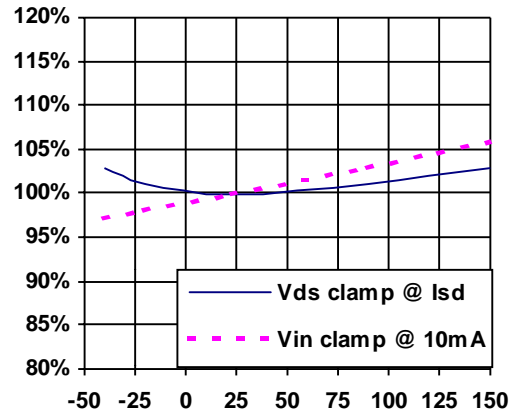


Figure 18 - V_{in} clamp and V_{clamp2} (%) Vs T_j ($^{\circ}\text{C}$)


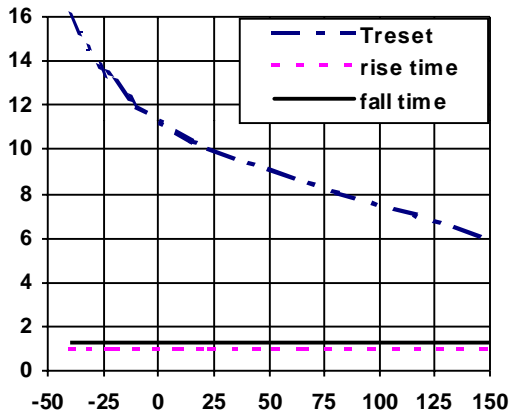


Figure 19 - Turn-on, Turn-off, and T_{reset} (μs) Vs T_j ($^{\circ}\text{C}$)

IPS042G

International
IR Rectifier

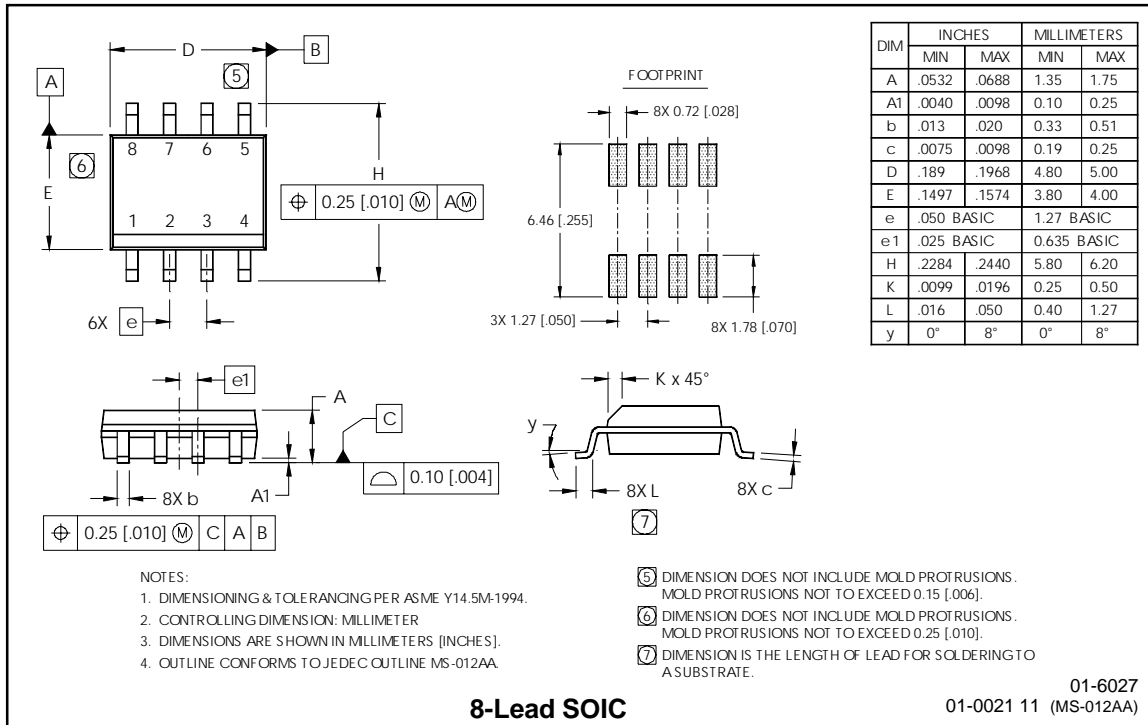

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
Data and specifications subject to change without notice. 6/11/2001



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.