




**CMSH2-20
CMSH2-40
CMSH2-60**

**SCHOTTKY BARRIER RECTIFIER
2.0 AMP, 20 THRU 60 VOLTS**



SMB CASE

**Central™
Semiconductor Corp.**

FEATURES:

- LOW COST
- SUPERIOR LOT TO LOT CONSISTENCY
- HIGH RELIABILITY
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD
- SPECIAL SELECTIONS AVAILABLE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2.0 Amp Surface Mount Silicon Schottky Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 12mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.


MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	CMSH2 -20	CMSH2 -40	CMSH2 -60	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	20	40	60	V
DC Blocking Voltage	V_R	20	40	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	28	42	V
Average Forward Current ($T_A=55^{\circ}\text{C}$)	I_O		2.0		A
Peak Forward Surge Current (8.3ms)	I_{FSM}		30		A
Operating and Storage Junction Temperature	T_J, T_{stg}		-65 to +150		$^{\circ}\text{C}$
Thermal Resistance	Θ_{JL}		20		$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	V_R =Rated V_{RRM}			0.50	mA
I_R	V_R =Rated V_{RRM} , $T_A=100^{\circ}\text{C}$			20	mA
V_F	$I_F=2.0\text{A}$ (CMSH2-20 AND CMSH2-40)			0.50	V
V_F	$I_F=2.0\text{A}$ (CMSH2-60)			0.70	V
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$, (CMSH2-20 AND CMSH2-40)		150		pF
C_J	$V_R=4.0\text{V}$, $f=1.0\text{MHz}$, (CMSH2-60)		120		pF

All dimensions in inches (mm).

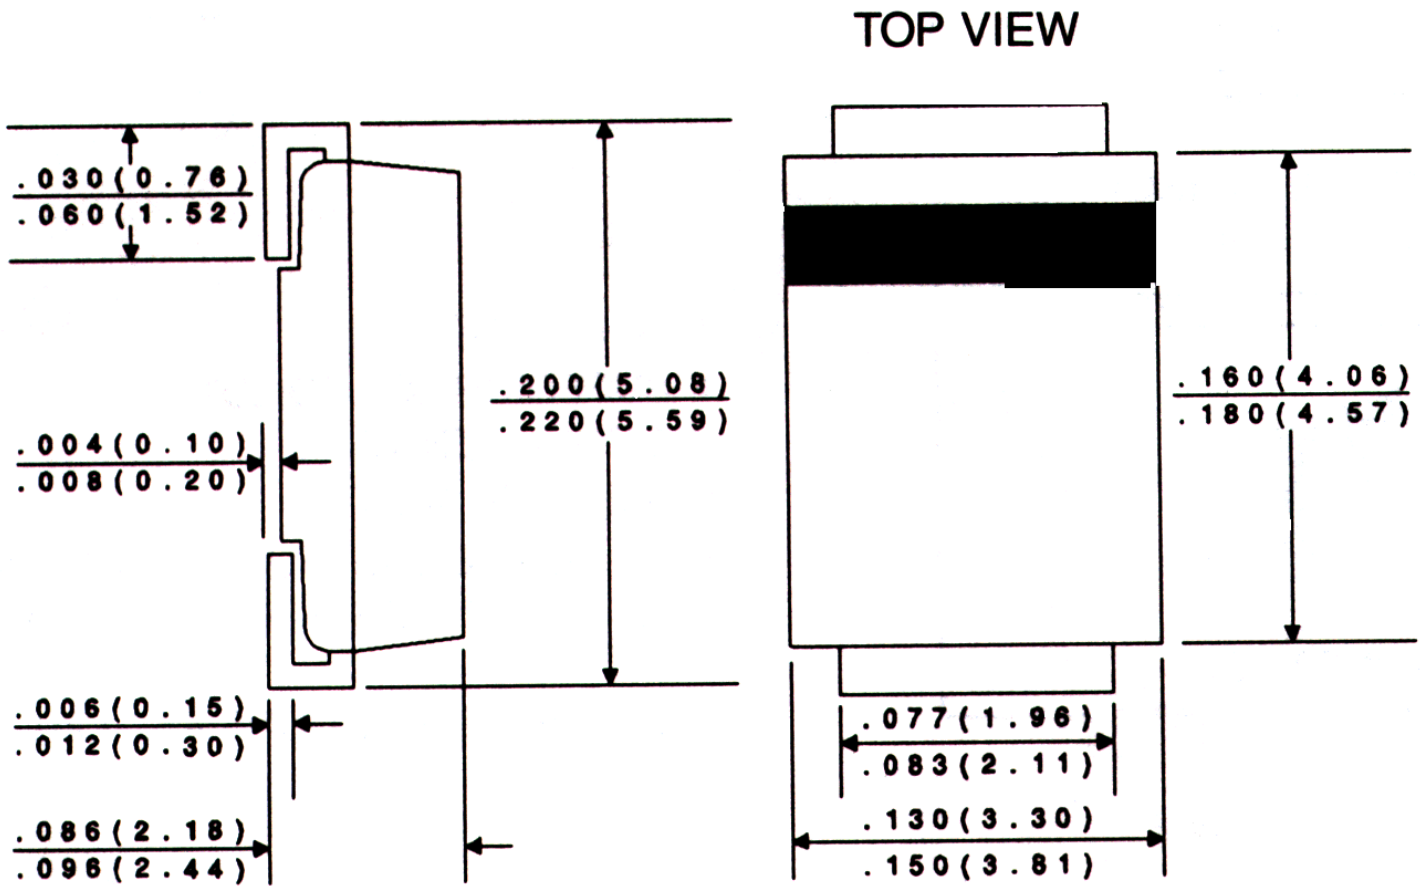

Marking Codes:

DEVICE	MARKING CODE
CMSH2-20	CS220
CMSH2-40	CS240
CMSH2-60	CS260



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.