

NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/371

Devices

2N3902

2N5157

Qualified Level

**JAN
JANTX**

MAXIMUM RATINGS


Ratings	Symbol	2N3902	2N5157	Unit
Collector-Emitter Voltage	V_{CEO}	400	500	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	6.0	Vdc
Collector-Base Voltage	V_{CBO}	700		Vdc
Base Current	I_B	2.0		Adc
Collector Current	I_C	3.5		Adc
Total Power Dissipation	P_T	@ $T_A = +25^{\circ}\text{C}$ ⁽¹⁾	5.0	W
		@ $T_C = +75^{\circ}\text{C}$ ⁽²⁾	100	W
Operating & Storage Temperature Range	T_j, T_{stg}	-65 to +200		$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.25	$^{\circ}\text{C}/\text{W}$

1) Derate linearly 29 mW/ $^{\circ}\text{C}$ for $T_A > +25^{\circ}\text{C}$

2) Derate linearly 0.8 mW/ $^{\circ}\text{C}$ for $T_C > +75^{\circ}\text{C}$

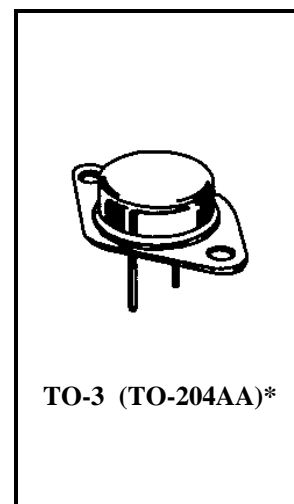

*See Appendix A for Package Outline

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Cutoff Current $V_{CE} = 325 \text{ Vdc}$ $V_{CE} = 400 \text{ Vdc}$	2N3902 2N5157	I_{CEO}	250 250	μAdc
Collector-Emitter Cutoff Current $V_{BE} = 1.5 \text{ Vdc}; V_{CE} = 700 \text{ Vdc}$		I_{CEX}	500	μAdc
Emitter-Base Cutoff Current $V_{EB} = 5.0 \text{ Vdc}$ $V_{EB} = 6.0 \text{ Vdc}$	2N3902 2N5157	I_{EBO}	200 200	μAdc

ON CHARACTERISTICS⁽³⁾

Base-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}; I_B = 0.1 \text{ Adc}$ $I_C = 3.5 \text{ Adc}; I_B = 0.7 \text{ Adc}$		$V_{BE(sat)}$	1.5 2.0	Vdc
Collector-Emitter Saturation Voltage $I_C = 1.0 \text{ Adc}; I_B = 0.1 \text{ Adc}$ $I_C = 3.5 \text{ Adc}; I_B = 0.7 \text{ Adc}$		$V_{CE(sat)}$	0.8 2.5	Vdc

2N3902, 2N5157 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS⁽³⁾ (con't)				
Forward-Current Transfer Ratio I _C = 0.5 Adc; V _{CE} = 5.0 Vdc I _C = 1.0 Adc; V _{CE} = 5.0 Vdc I _C = 2.5 Adc; V _{CE} = 5.0 Vdc I _C = 3.5 Adc; V _{CE} = 5.0 Vdc	h _{FE}	25 30 10 5	90	
Collector-Emitter Sustaining Voltage I _C = 100 mAdc	V _{CEO(sus)}	2N3902 2N5157	325 400	Vdc

DYNAMIC CHARACTERISTICS

Small-Signal Short-Circuit Forward Current Transfer Ratio I _C = 0.2 Adc; V _{CE} = 10 Vdc, f = 1 MHz	h _{fe}	2.5	25	
Output Capacitance V _{CB} = 10 Vdc; I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		250	pF

SWITCHING CHARACTERISTICS

Turn-On Time V _{CC} = 125 Vdc; I _C = 1.0 Adc; I _{B1} = 0.1 Adc	t _{on}		0.8	μs
Turn-Off Time V _{CC} = 125 Vdc; I _C = 1.0 Adc; I _{B1} = 0.1 Adc; -I _{B2} = 0.50 Adc	t _{off}		1.7	μs

SAFE OPERATING AREA

DC Tests (continuous)

T_C = +25°C; t ≥ 1.0 s (See Figure 3 of MIL-PRF-19500/371)

Test 1

V_{CE} = 28.6 Vdc, I_C = 3.5 Adc

Test 2

V_{CE} = 70 Vdc, I_C = 1.43 Adc

Test 3

V_{CE} = 325 Vdc, I_C = 55 mAdc 2N3902

V_{CE} = 400 Vdc, I_C = 35 mAdc 2N5157

Switching Tests

Load condition C (unclamped inductive load)

T_C = 25°C; duty cycle ≤ 10%; R_S = 0.1 Ω (See Figure 4 of MIL-PRF-19500/371)

Test 1

t_P = approximately 3 ms (vary to obtain I_C); R_{BB1} = 20 Ω; V_{BB1} = 10 Vdc; R_{BB2} = 3 kΩ;
V_{BB2} = 1.5 Vdc; V_{CC} = 50 Vdc; I_C = 3.5 Adc; L = 60 mH; R = 3 Ω; R_L ≤ 14Ω.

Test 2

t_P = approximately 3 ms (vary to obtain I_C); R_{BB1} = 100 Ω; V_{BB1} = 10 Vdc; R_{BB2} = 3 kΩ;
V_{BB2} = 1.5 Vdc; I_C = 0.6 Adc V_{CC} = 50 Vdc; L = 200 mH; R = 8 Ω; R_L ≤ 83Ω.

Switching Tests

Load condition (clamped inductive load)

T_C = +25°C; duty cycle ≤ 10%. (See Figure 5 of MIL-PRF-19500/371)

Test 1

t_P = approximately 30 ms (vary to obtain I_C); R_S = 0.1 Ω; R_{BB1} = 20 Ω; V_{BB1} = 10 Vdc; R_{BB2} = 100 Ω;
V_{BB2} = 1.5 Vdc; V_{CC} = 50 Vdc; I_C = 3.5 Adc; L = 60 mH; R = 3 Ω; R_L ≥ 0Ω.

(A suitable clamping circuit or diode can be used.)

Clamp Voltage = 400 +0, -5 Vdc 2N3902

Clamp Voltage = 500 +0, -5 Vdc 2N5157

(Clamped voltage must be reached)

3.) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.