FM ONE CHIP RADIO

The KA22429 is a monolithic integrated circuit designed for Portable FM radio.
It is consisting of a RF input stage, Mixer, IF, Mute control and Loop (earphone drive) AMP.
It is suitable a pocket-size radio.

16 SOP



FUNCTIONS

- RF input stage
- Local osc
- Mixer
- IF amp
- Mute control
- Earphone drive amp.

FEATURES

- **Minimum number of external parts required**
- **It is able to a single trimmer tuning**
- **No FM det coil**
- **It is FLL IF detect system (76KHz)**
- **Operating voltage: V_{CC} = 1.8V ~ 6.0V**

ORDERING INFORMATION

Device	Package	Operating Temperature
KA22429D	16 SOP	−10°C ~ +70°C

BLOCK DIAGRAM

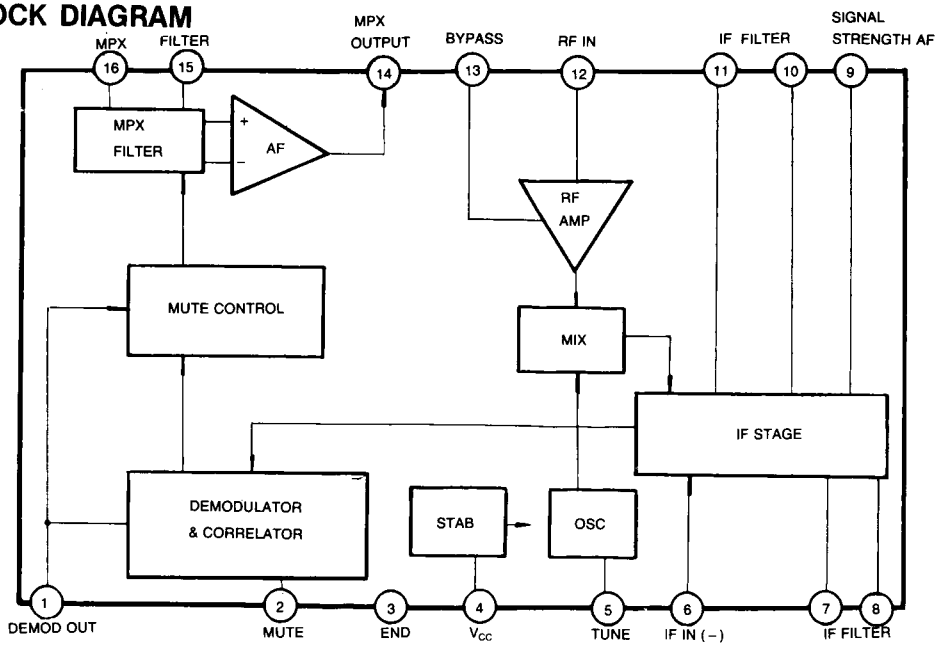

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	7	V
Oscillator Voltage	V_{OSC}	− 0.5 ~ + 0.5	V
Operating Temperature	T_{OPR}	− 10 ~ + 70	°C
Storage Temperature	T_{STG}	− 55 ~ + 150	°C
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	300	K/W

ELECTRICAL CHARACTERISTIC

MONO CONDITION: f = 98MHz, f_m = 1KHz, Δf = ± 22.5KHz, V_I = 50dBμ, Ta = 25°C, V_{CC} = 3V
STEREO CONDITION: f = 98MHz, f_m = 1KHz, Δf = ± 22.5KHz, V_I = 60dBμ (Modulated with pilot Δf = ± 6.75KHz)

Characteristic		Symbol	Test Condition	Min	Typ	Max	Unit
Quiescent Circuit Current		I_{CCQ}	V_I = 0		6.3		mA
MONO	Sensitivity	S_{VI1}	− 3dB: Mute Disable		12		dBμ
		S_{VI2}	S/N = 26dB: Mute Enable		17		dBμ
	Signal to Noise Ratio	S/N_1			60		dB
	Total Harmonic Distortion	THD_1	Δf = ± 22.5KHz		0.7		%
		THD_2	Δf = ± 75KHz		2.3		%
	AM Rejection Ratio	AMR	AM: fm = 1KHz, m = 80% FM: fm = 1KHz, Δf = 75KHz		50		dB
	Oscillator Voltage	V_{OSC}			250		mV
	AFC Range	ΔAFC			160		KHz
	Mute Range	MR			120		KHz
	Band Width	BW	ΔV_O = 3dB Pre-Emphasis t = 5KHz		10		KHz
	AM Output Voltage	V_{O1}			90		μV
STEREO	Sensitivity	S_{VI3}	S/N = 46dB		49		dBμ
	Signal to Noise Ratio	S/N_2			53		dB
	Channel Separation	CS			20		dB
	AF Output Voltage	V_{O2}			80		mV

TEST CIRCUIT

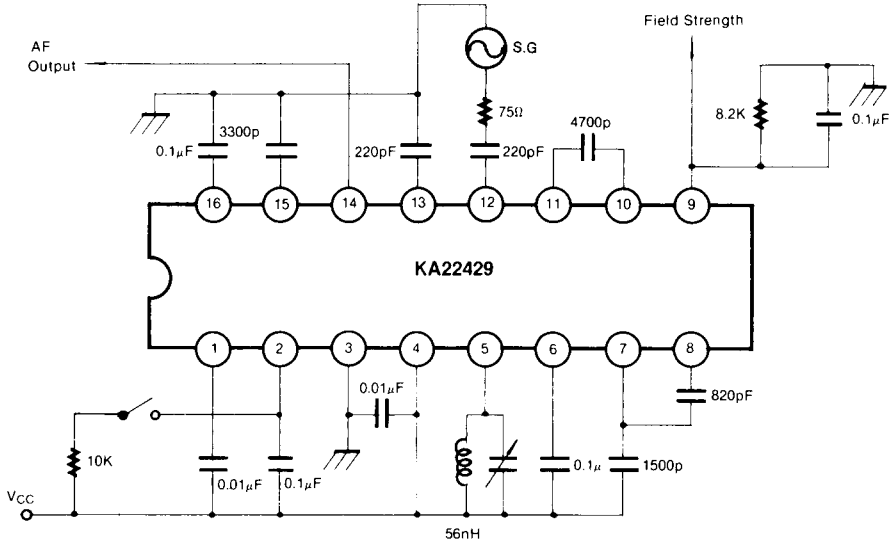

Fig. 1 Test Circuit for Mono Operation

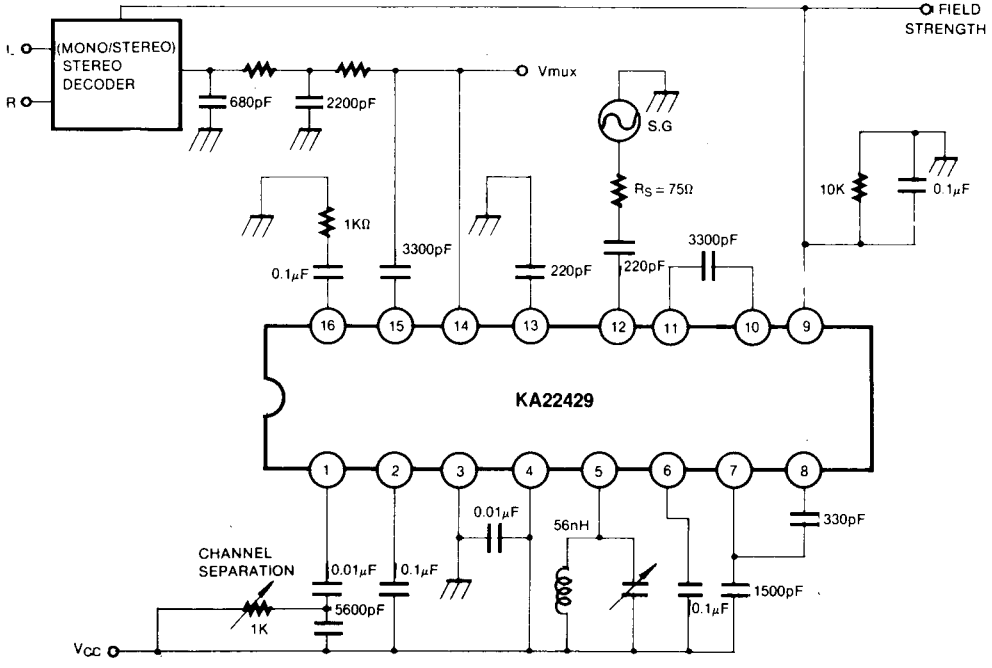

Fig. 2 Test Circuit for Stereo Operation

APPLICATION CIRCUIT

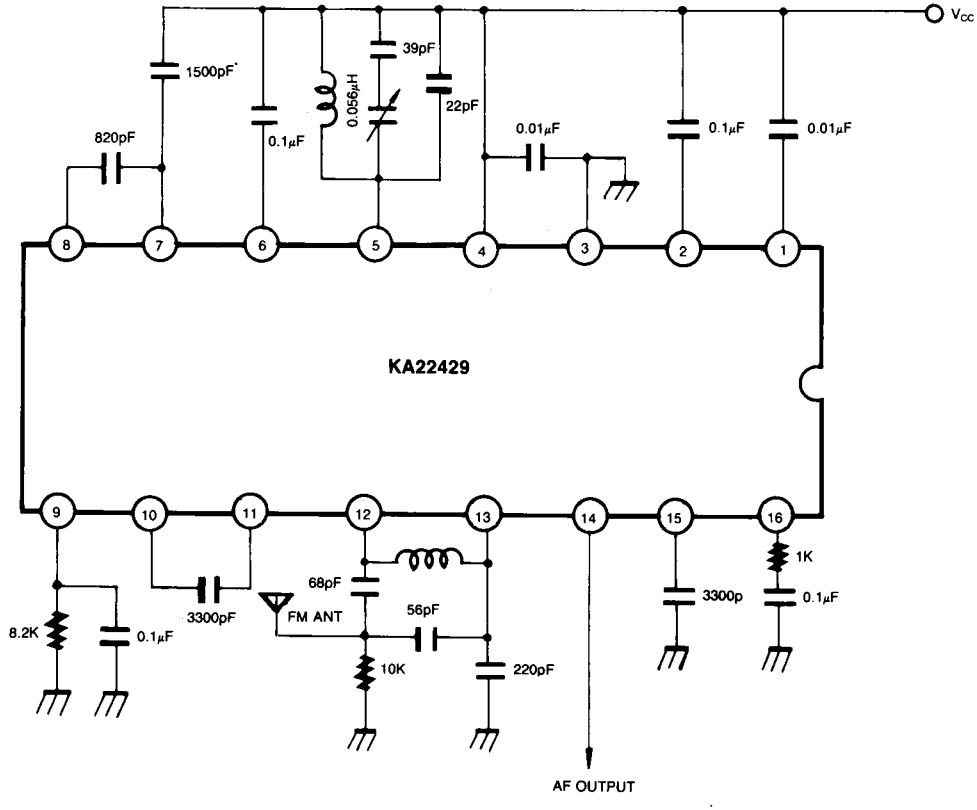

littlediode
COMPONENTS FOR ALL

Littlediode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.