

2SB1645

Silicon PNP triple diffusion planar type Darlington


For power amplification

■ Features


- Satisfactory forward current transfer ratio h_{FE} characteristics
- Wide area of safe operation (ASO)
- Optimum for the output stage of a HiFi audio amplifier

■ Absolute Maximum Ratings $T_C = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit	
Collector to base voltage	V_{CBO}	-160	V	
Collector to emitter voltage	V_{CEO}	-160	V	
Emitter to base voltage	V_{EBO}	-5	V	
Peak collector current	I_{CP}	-15	A	
Collector current	I_C	-8	A	
Collector power dissipation	P_C	$T_C = 25^\circ\text{C}$	100	W
		$T_a = 25^\circ\text{C}$	3	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	

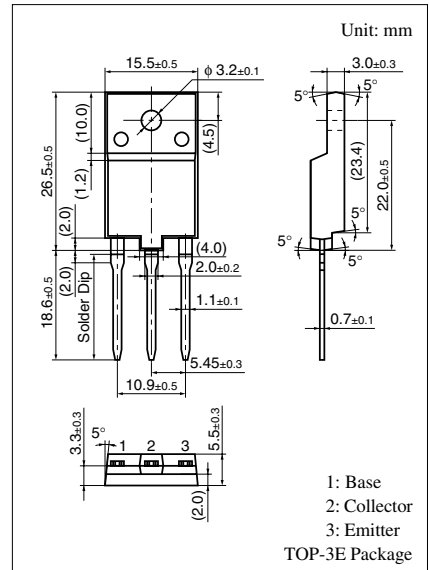

Internal Connection

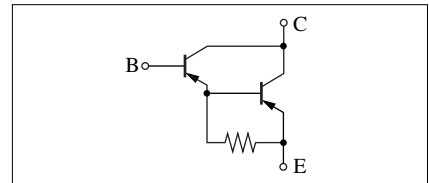


■ Electrical Characteristics $T_C = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = -160\text{ V}, I_E = 0$			-100	μA
	I_{CEO}	$V_{CB} = -160\text{ V}, I_E = 0$			-100	μA
Emitter cutoff current	I_{EBO}	$V_{EB} = -5\text{ V}, I_C = 0$			-100	μA
Collector to emitter voltage	V_{CEO}	$I_C = -10\text{ mA}, I_B = 0$	-160			V
Forward current transfer ratio	h_{FE1}	$V_{CE} = -5\text{ V}, I_C = -1\text{ A}$	500			
	h_{FE2}^*	$V_{CE} = -5\text{ V}, I_C = -7\text{ A}$	3 500		15 000	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -7\text{ A}, I_B = -7\text{ mA}$			-3	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = -7\text{ A}, I_B = -7\text{ mA}$			-3	V
Transition frequency	f_T	$V_{CE} = -10\text{ V}, I_C = -0.5\text{ A}, f = 1\text{ MHz}$		20		MHz
Turn-on time	t_{on}	$V_{CC} = -50\text{ V}$		1.0		μs
Storage time	t_{stg}			1.5		μs
Fall time	t_f			1.2		μs


Note) *: Rank classification

Rank	P	Q
h_{FE2}	5 000 to 15 000	3 500 to 10 000

$P_C - T_a$

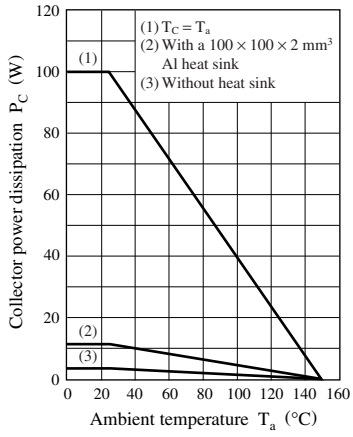

Area of safe operation (ASO)

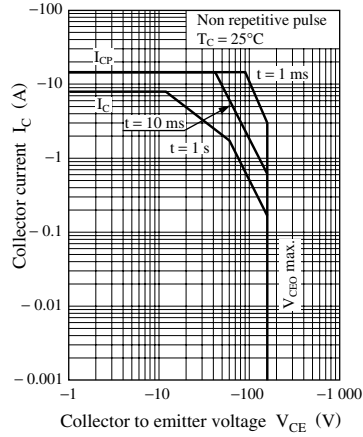



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.