

SANYO

No.3177A

LA5640N**Voltage Regulator for LCD**

The LA5640N is a voltage regulator IC for use in LCD-used sets as well as desk-top calculators. This IC, designed for LSI which drives LCD, regulates LCD driving voltage of LSI according to the temperature characteristic of LCD so that the variations in temperature cause no shading of LCD.

Features

- Small quiescent current : 20 μ A typ.
- Small input-output voltage drop : 0.1V typ.
- Output voltage : 3.15V typ.
- Temperature coefficient of output voltage : 11.2mV/ $^{\circ}$ C typ.

Maximum Ratings at Ta = 25 $^{\circ}$ C


		unit
Maximum Supply Voltage	V_{CC} max	8.5 V
Maximum Output Current	I_O max	300 μ A
Allowable Power Dissipation	P_d max	300 mW
Operating Temperature	T_{opr}	-25 to +75 $^{\circ}$ C
Storage Temperature	T_{stg}	-55 to +125 $^{\circ}$ C

Recommended Operating Conditions at Ta = 25 $^{\circ}$ C


		unit
Supply Voltage	V_{CC}	4.0 to 7.0 V
Output Current	I_O	50 to 250 μ A

Operating Characteristics at Ta = 25 $^{\circ}$ C, V_{CC} = 6V

		min	typ	max	unit
Output Voltage 1	V_O V_{CC} = 4 to 7V, I_O = 50 to 250 μ A (Pins 3-1)	2.90	3.15	3.4	V
Output Voltage 2	H- V_O I_O = 50 to 250 μ A, T_a = 40 $^{\circ}$ C	2.7	2.95	3.2	V
Output Voltage 3	C- V_O I_O = 50 to 250 μ A, T_a = 0 $^{\circ}$ C	3.1	3.45	3.8	V
Reactive Voltage	V_C I_O = 250 μ A		0.1	0.3	V
Quiescent Current	I_{CC}		20	40	μ A
Line Regulation	ΔV_O		2		mV/V
Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	-11.2			mV/ $^{\circ}$ C

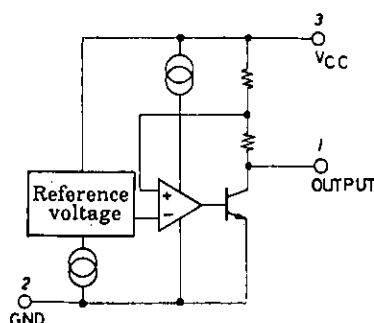Equivalent Circuit**Package Dimensions**
(unit: mm)

3131

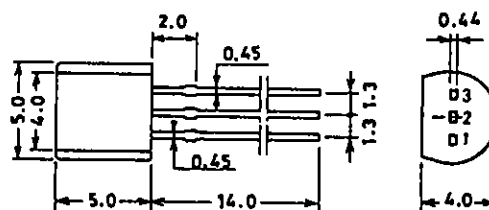



JEDEC: TO-92
EIAJ: SC-43
SANYO: NP

3: V_{CC}
2: GND
1: OUTPUT


SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

7049YT, TS No.3177-1/2

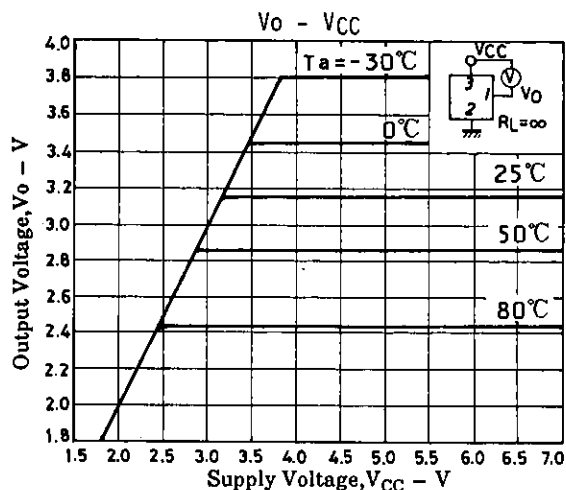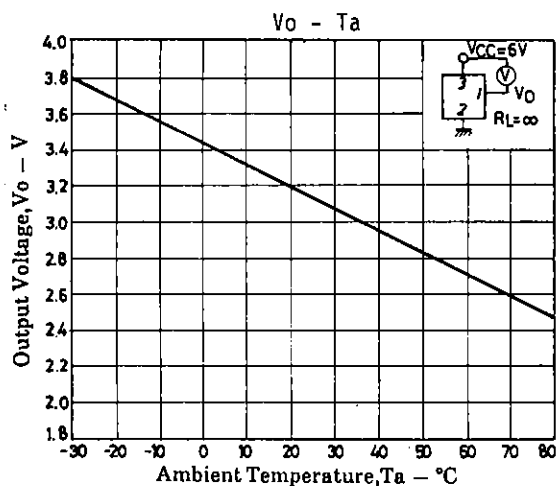

Sample Application Circuit

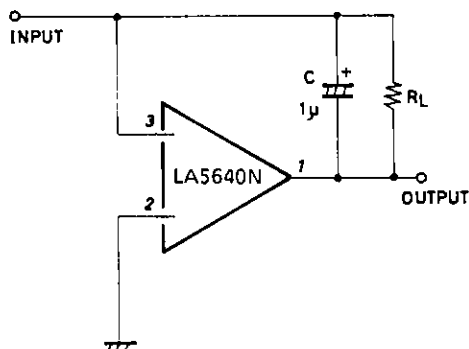

Unit (capacitance: F)

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.