


NPN Silicon RF Transistor

BF 507

SIEMENS AKTIENGESELLSCHAFT 04513 D

BF 507 is an NPN silicon planar RF transistor in TO 92 plastic package (10 A 3 DIN 41868). The transistor is particularly intended for use in VHF amplifiers, VHF mixers and VHF/UHF oscillators.

Type	Ordering code
BF 507	Q62702-F571

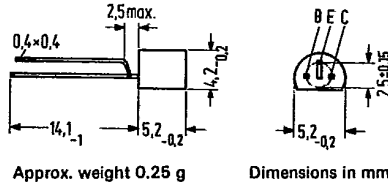

Approx. weight 0.25 g

Dimensions in mm

Maximum ratings ($T_{amb} = 25^{\circ}\text{C}$)

Collector-emitter voltage	V_{CE0}	25	V
Collector-base voltage	V_{CBO}	30	V
Emitter-base voltage	V_{EBO}	3	V
Collector current	I_C	20	mA
Collector peak current	I_{CM}	50	mA
Base current	I_B	5	mA
Junction temperature	T_j	150	$^{\circ}\text{C}$
Storage temperature range	T_{stg}	-55 to +150	$^{\circ}\text{C}$
Total power dissipation	P_{tot}	500	mW

Thermal resistance

Junction to ambient air	R_{thJA}	≤ 250	K/W
-------------------------	------------	------------	-----

Static characteristics ($T_{amb} = 25^{\circ}\text{C}$)

Collector cutoff current ($V_{CBO} = 25\text{ V}$)	I_{CBO}	≤ 100	nA
Collector-emitter breakdown voltage ($I_C = 1\text{ mA}$)	$V_{(BR)CEO}$	≥ 25	V
Collector-base breakdown voltage ($I_C = 10\text{ }\mu\text{A}$)	$V_{(BR)CBO}$	≥ 30	V
Emitter-base breakdown voltage ($I_E = 10\text{ }\mu\text{A}$)	$V_{(BR)EBO}$	≥ 3	V
DC current gain ($I_C = 1\text{ mA}; V_{CE} = 10\text{ V}$)	h_{FE}	≥ 30	-
($I_C = 5\text{ mA}; V_{CE} = 10\text{ V}$)	h_{FE}	≥ 40	-
Base-emitter voltage ($I_C = 5\text{ mA}; V_{CE} = 10\text{ V}$)	V_{BE}	≤ 0.95	V
Collector-emitter saturation voltage ($I_C = 5\text{ mA}; I_B = 0.5\text{ mA}$)	V_{CEsat}	≤ 0.6	V

Dynamic characteristics ($T_{amb} = 25^{\circ}\text{C}$)

Transition frequency ($I_C = 5\text{ mA}; V_{CE} = 10\text{ V}; f = 100\text{ MHz}$)	f_T	≥ 750	MHz
Noise figure ($I_C = 3\text{ mA}; V_{CE} = 10\text{ V}; f = 200\text{ MHz}; R_g = 60\text{ }\Omega$)	NF	3	dB
Collector-base capacitance ($f = 1\text{ MHz}; V_{BE} = 0\text{ V}$) ¹⁾	C_{CB}	≤ 0.75	pF
Collector-emitter capacitance ($f = 1\text{ MHz}; V_{CB} = 10\text{ V}; V_{BE} = 0\text{ V}$) ¹⁾	C_{CE}	0.35 to 0.65	pF

¹⁾ Third terminal at screening potential



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.