


Silicon Variable Capacitance Diode

- For UHF and TV/TR tuners
- Large capacitance ratio, low series resistance

BB 535

 CASE 477-02, STYLE 1
SOD-323


MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Diode Reverse Voltage	V_R	30	V
Peak reverse voltage ($R \geq 5k\Omega$)	V_{RM}	35	V
Forward Current	I_F	20	mA
Operating temperature range	T_{op}	- 55 ~ + 125	°C
Storage temperature	T_{stg}	- 55 ... + 150	°C

THERMAL RESISTANCE

Parameter	Symbol	Value	Unit
Junction - ambient	R_{thJA}	≤ 450	K/W

DC CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse current	I_R				nA
$V_R = 30\text{ V}, T_A = 25\text{ °C}$		–	–	10	
$V_R = 30\text{ V}, T_A = 85\text{ °C}$		–	–	200	


AC CHARACTERISTICS

Diode capacitance	C_T				pF
$V_R = 1\text{ V}, f = 1\text{ MHz}$		17.5	18.7	20	
$V_R = 2\text{ V}, f = 1\text{ MHz}$		14.01	15	16.1	
$V_R = 25\text{ V}, f = 1\text{ MHz}$		2.05	2.24	2.4	
$V_R = 28\text{ V}, f = 1\text{ MHz}$		1.9	2.1	2.3	
Capacitance ratio	C_{T2}/C_{T25}				–
$V_R = 2\text{ V}, V_R = 25\text{ V}, f = 1\text{ MHz}$		6	6.7	7.5	
Capacitance ratio	C_{T1}/C_{T28}				–
$V_R = 1\text{ V}, V_R = 28\text{ V}, f = 1\text{ MHz}$		8.2	8.9	9.8	
Capacitance matching	$\Delta C_T / C_T$				%
$V_R = 1 \dots 28\text{ V}, f = 1\text{ MHz}$		–	–	2.5	
Series resistance	r_s				Ω
$V_R = 3\text{ V}, f = 470\text{ MHz}$		–	0.55	0.65	
Series inductance	L_s				nH
		–	2	–	

BB 535


Diode capacitance

$C_T = f(V_R) f = 1\text{MHz}$

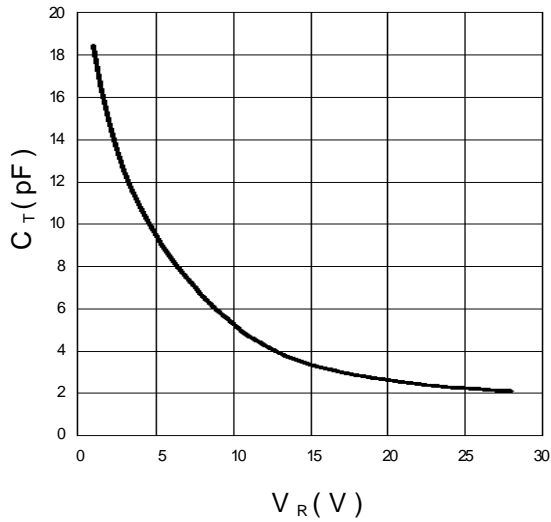


Temperature coefficient of the diode capacitance

$T_{Cc} = f(V_R) f = 1\text{MHz}$

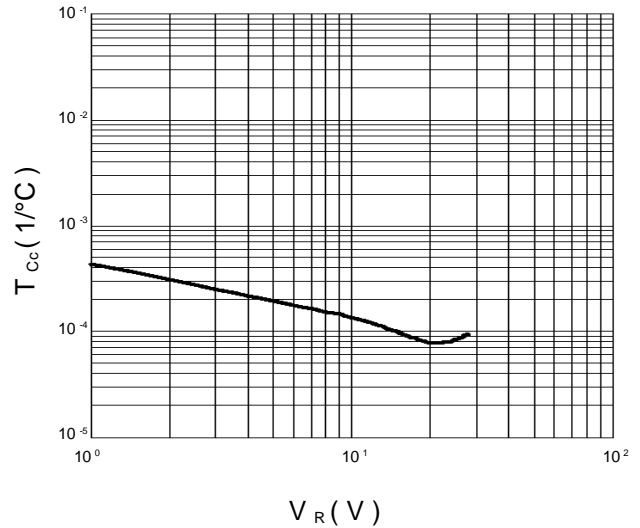


Normalized diode capacitance

$C(T_A) / C(25^\circ\text{C}) = f(T_A), f = 1\text{MHz}, V_R = \text{Parameter}$

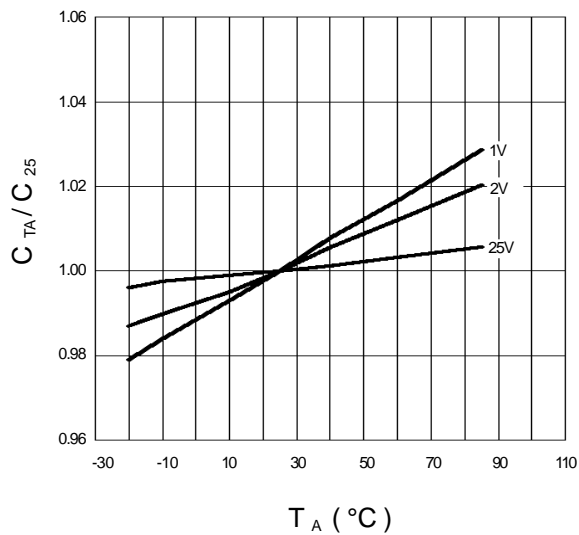


Reverse current

$I_R = f(T_A), V_R = 28\text{V}$

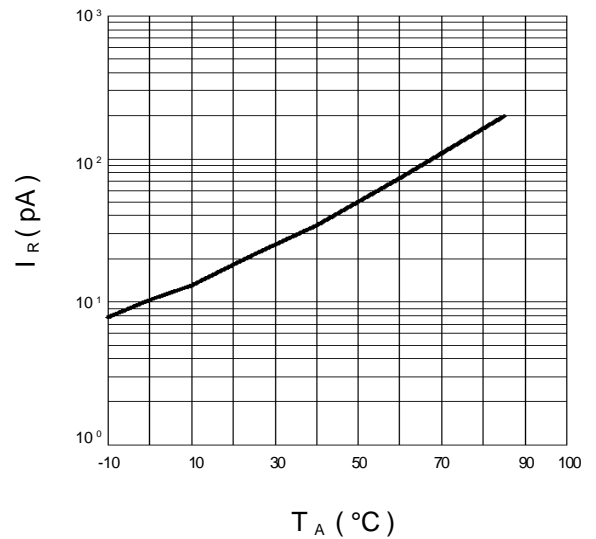

BB 535**Reverse current**

$$I_R = f(V_R), T_A = \text{Parameter}$$

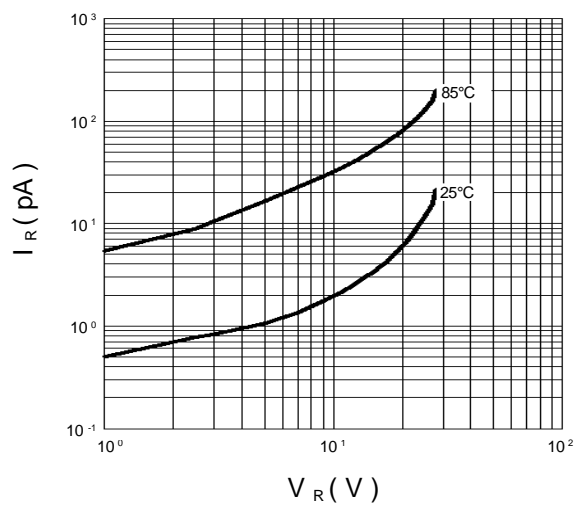



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.