

Thyristors

logic level

BT169 series

GENERAL DESCRIPTION

Glass passivated, sensitive gate thyristors in a plastic envelope, intended for use in general purpose switching and phase control applications. These devices are intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.


QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	MAX.	MAX.	UNIT
	BT169	B	D	E	G	
V_{DRM} , V_{RRM}	Repetitive peak off-state voltages	200	400	500	600	V
$I_{T(AV)}$	Average on-state current	0.5	0.5	0.5	0.5	A
$I_{T(RMS)}$	RMS on-state current	0.8	0.8	0.8	0.8	A
I_{TSM}	Non-repetitive peak on-state current	8	8	8	8	A


PINNING - TO92 variant

PIN	DESCRIPTION
1	anode
2	gate
3	cathode

PIN CONFIGURATION

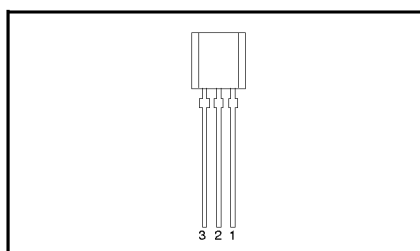

SYMBOL

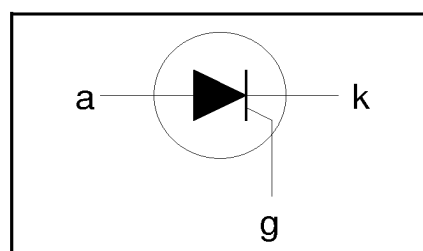

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.				UNIT
				B	D	E	G	
V_{DRM} , V_{RRM}	Repetitive peak off-state voltages		-	200 ¹	400 ¹	500 ¹	600 ¹	V
$I_{T(AV)}$	Average on-state current	half sine wave; $T_{lead} \leq 83^\circ\text{C}$	-	0.5				A
$I_{T(RMS)}$	RMS on-state current	all conduction angles	-	0.8				A
I_{TSM}	Non-repetitive peak on-state current	$t = 10\text{ ms}$	-	8				A
		$t = 8.3\text{ ms}$	-	9				A
I^2t	I^2t for fusing	half sine wave; $T_j = 25^\circ\text{C}$ prior to surge	-	0.32				A ² s
di_T/dt	Repetitive rate of rise of on-state current after triggering	$t = 10\text{ ms}$ $I_{TM} = 2\text{ A}$; $I_G = 10\text{ mA}$; $di_G/dt = 100\text{ mA}/\mu\text{s}$	-	50				A/ μs
I_{GM}	Peak gate current		-	1				A
V_{GM}	Peak gate voltage		-	5				V
V_{RGM}	Peak reverse gate voltage		-	5				V
P_{GM}	Peak gate power		-	2				W
$P_{G(AV)}$	Average gate power	over any 20 ms period	-	0.1				W
T_{stg}	Storage temperature		-40	150				$^\circ\text{C}$
T_j	Operating junction temperature		-	125				$^\circ\text{C}$

¹ Although not recommended, off-state voltages up to 800V may be applied without damage, but the thyristor may switch to the on-state. The rate of rise of current should not exceed 15 A/ μs .

Thyristors

logic level

BT169 series

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-lead}$	Thermal resistance junction to lead	pcb mounted; lead length = 4mm	-	-	60	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient		-	150	-	K/W

STATIC CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{GT}	Gate trigger current	$V_D = 12\ \text{V}$; $I_T = 10\ \text{mA}$; gate open circuit	-	50	200	μA
I_L	Latching current	$V_D = 12\ \text{V}$; $I_{GT} = 0.5\ \text{mA}$; $R_{GK} = 1\ \text{k}\Omega$	-	2	6	mA
I_H	Holding current	$V_D = 12\ \text{V}$; $I_{GT} = 0.5\ \text{mA}$; $R_{GK} = 1\ \text{k}\Omega$	-	2	5	mA
V_T	On-state voltage	$I_T = 1\ \text{A}$	-	1.2	1.35	V
V_{GT}	Gate trigger voltage	$V_D = 12\ \text{V}$; $I_T = 10\ \text{mA}$; gate open circuit	-	0.5	0.8	V
		$V_D = V_{DRM(max)}$; $I_T = 10\ \text{mA}$; $T_j = 125\ ^\circ\text{C}$; gate open circuit	0.2	0.3	-	V
I_D, I_R	Off-state leakage current	$V_D = V_{DRM(max)}$; $V_R = V_{RRM(max)}$; $T_j = 125\ ^\circ\text{C}$; $R_{GK} = 1\ \text{k}\Omega$	-	0.05	0.1	mA







DYNAMIC CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
dV_D/dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)}$; $T_j = 125\ ^\circ\text{C}$; exponential waveform; $R_{GK} = 1\ \text{k}\Omega$	-	25	-	V/ μs
t_{gt}	Gate controlled turn-on time	$I_{TM} = 2\ \text{A}$; $V_D = V_{DRM(max)}$; $I_G = 10\ \text{mA}$; $dI_G/dt = 0.1\ \text{A}/\mu\text{s}$	-	2	-	μs
t_q	Circuit commutated turn-off time	$V_D = 67\% V_{DRM(max)}$; $T_j = 125\ ^\circ\text{C}$; $I_{TM} = 1.6\ \text{A}$; $V_R = 35\ \text{V}$; $dI_{TM}/dt = 30\ \text{A}/\mu\text{s}$; $dV_D/dt = 2\ \text{V}/\mu\text{s}$; $R_{GK} = 1\ \text{k}\Omega$	-	100	-	μs







Thyristors
logic level

BT169 series

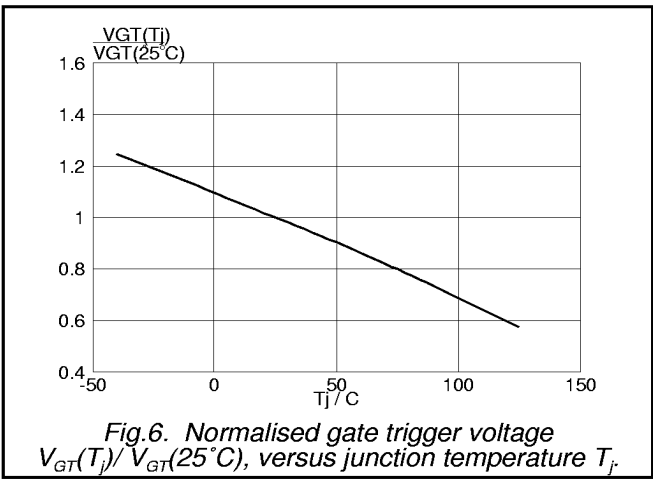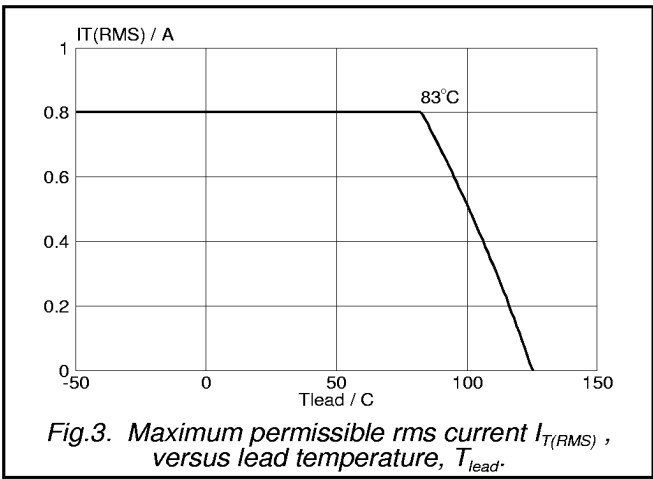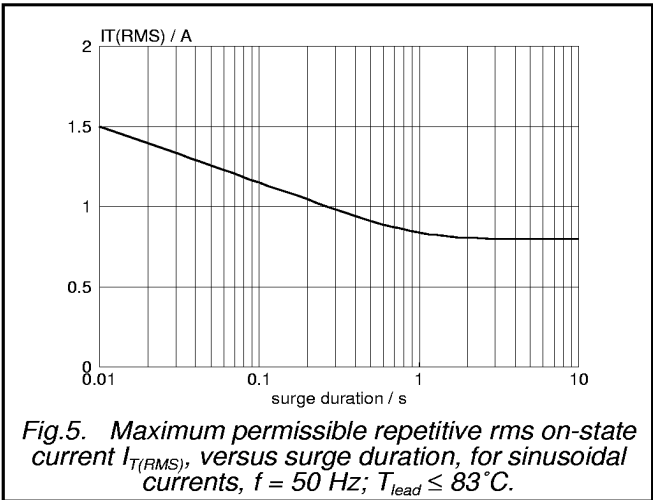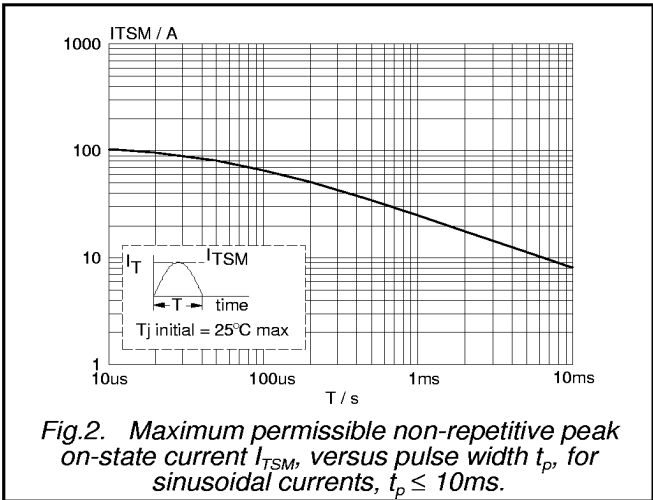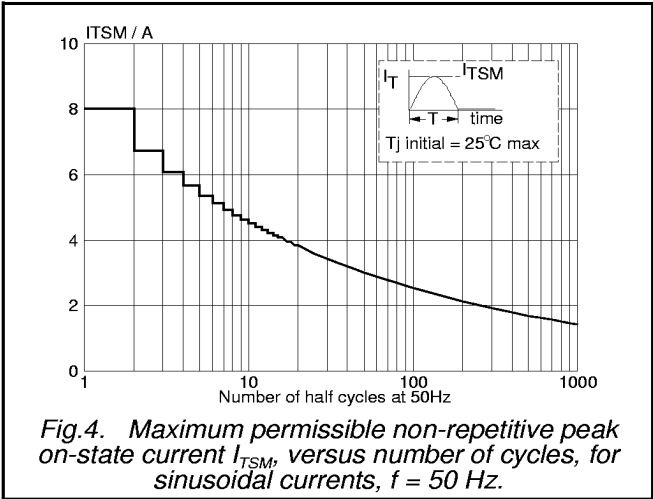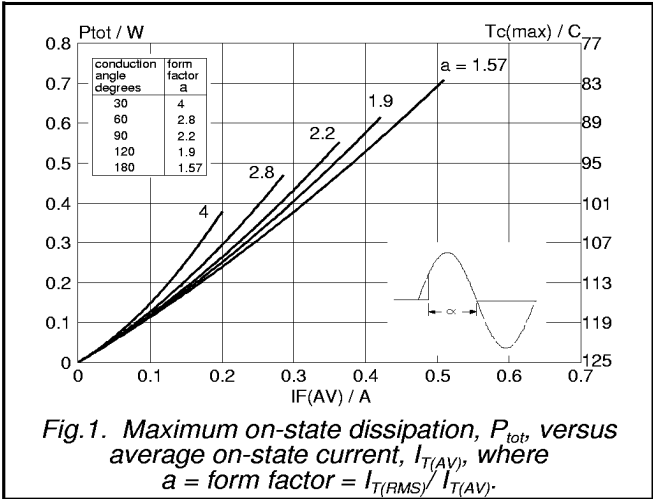

Thyristors
logic level


BT169 series

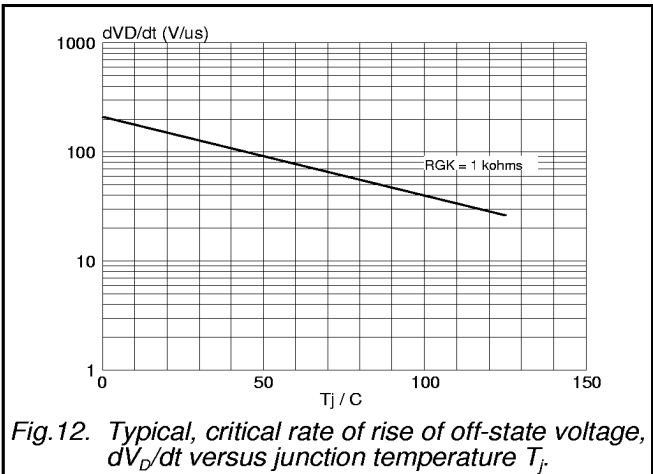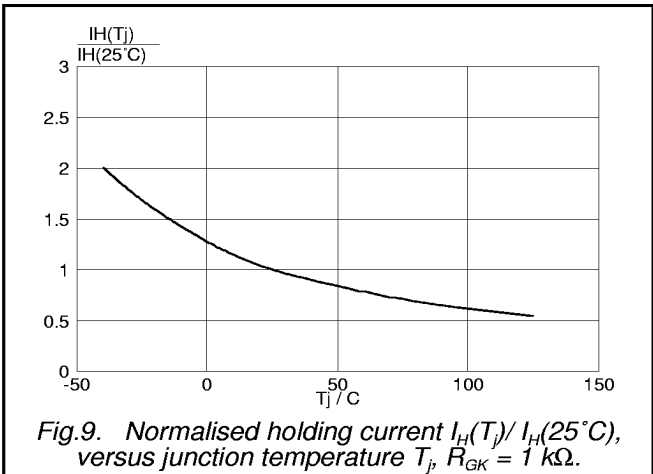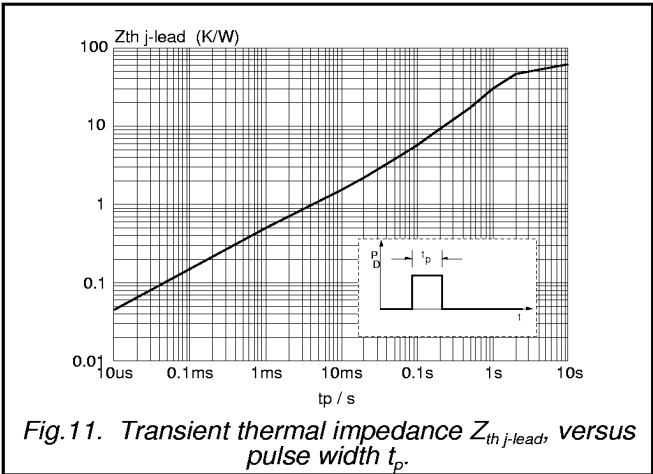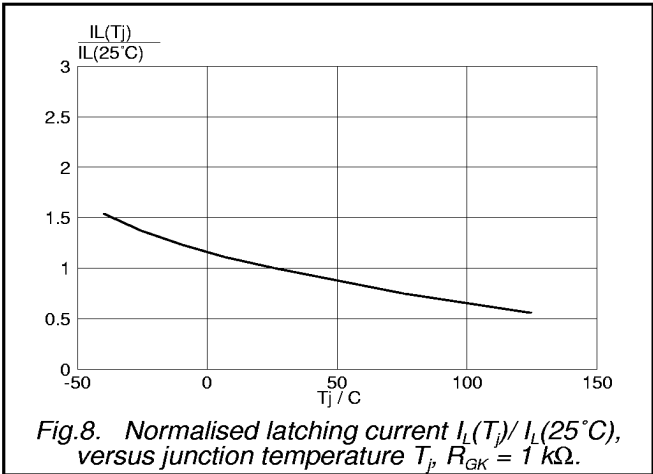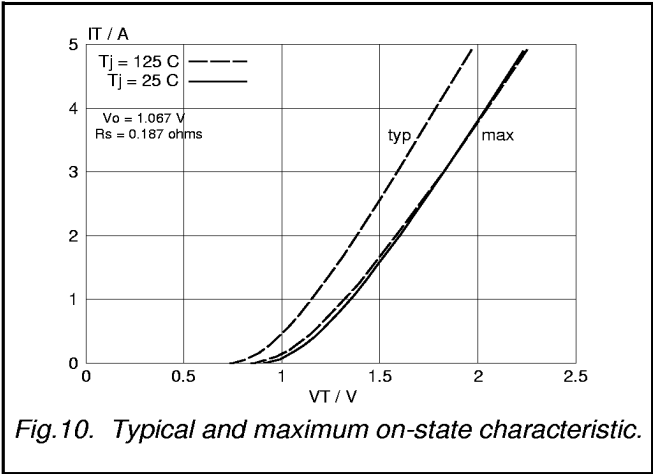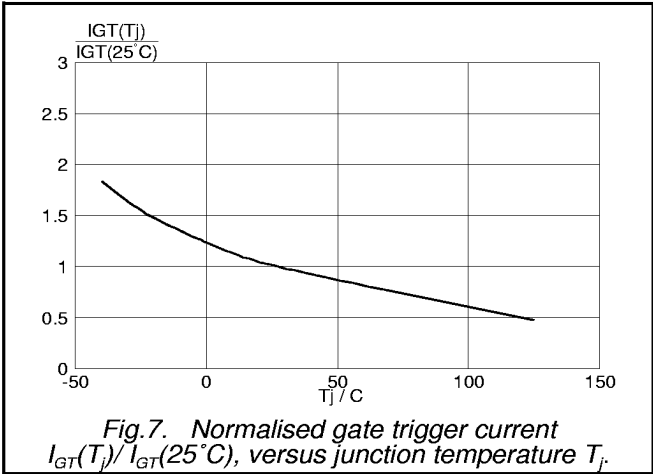

Thyristors
logic level

BT169 series

MECHANICAL DATA

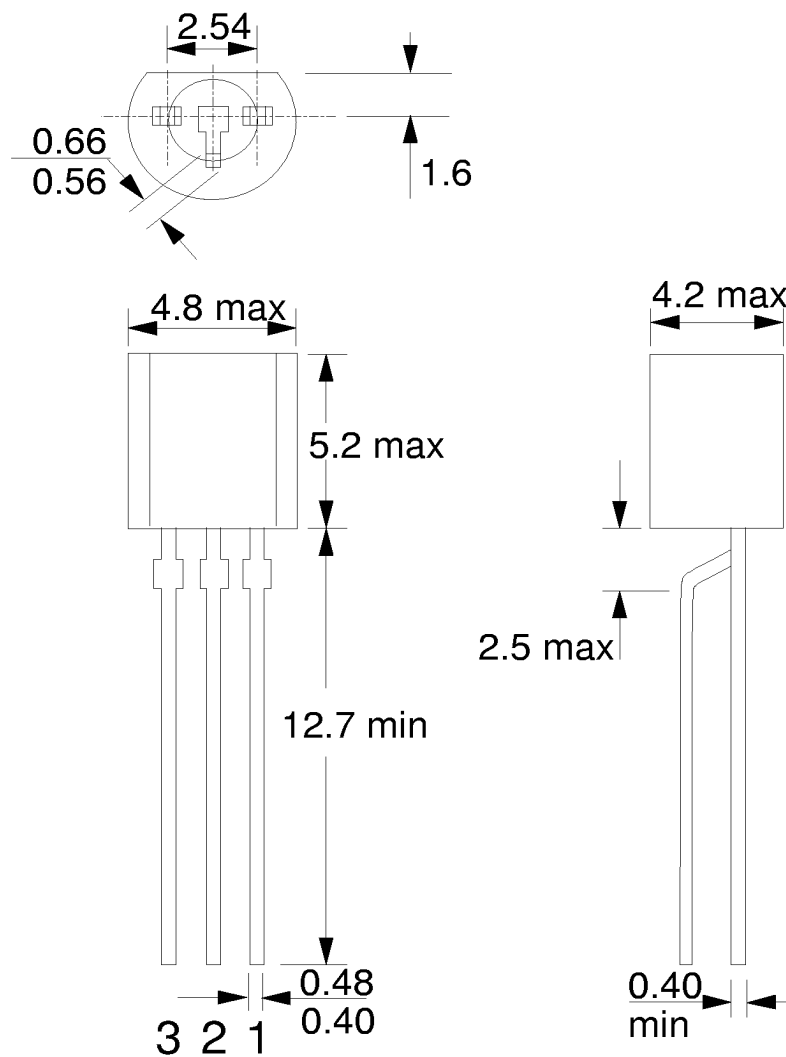*Dimensions in mm**Net Mass: 0.2 g**Fig.13. TO92; plastic envelope.***Notes**

1. Epoxy meets UL94 V0 at 1/8".