


NPN Silicon RF Transistors

BF 840
BF 841

- Suitable for common emitter RF, IF amplifiers
- Low collector-base capacitance due to contact shield diffusion
- Low output conductance

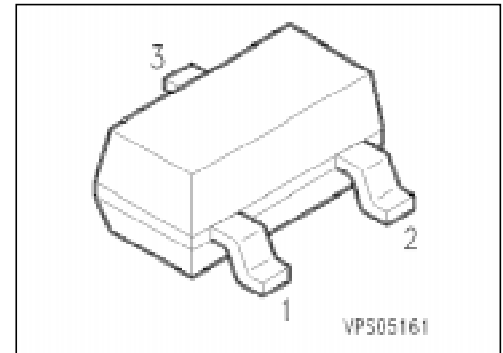

Type	Marking	Ordering Code	Pin Configuration			Package ¹⁾
			1	2	3	
BF 840	NC	Q62702-F1240	B	E	C	SOT-23
BF 841	ND	Q62702-F1287				

Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	V_{CE0}	40	V
Collector-base voltage	V_{CB0}	40	
Emitter-base voltage	V_{EB0}	4	
Collector current	I_C	25	mA
Base current	I_B	2	
Total power dissipation, $T_A \leq 25\text{ °C}^2)$	P_{tot}	280	mW
Junction temperature	T_j	150	°C
Storage temperature range	T_{stg}	- 65 ... + 150	

Thermal Resistance

Junction - ambient ²⁾	$R_{th\ JA}$	≤ 450	K/W
----------------------------------	--------------	------------	-----

¹⁾ For detailed information see chapter Package Outlines.

²⁾ Package mounted on alumina 15 mm × 16.7 mm × 0.7 mm.

Electrical Characteristics

at $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage $I_C = 1\text{ mA}, I_B = 0$	$V_{(BR)CE0}$	40	–	–	V
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}, I_B = 0$	$V_{(BR)EB0}$	4	–	–	
Collector-base cutoff current $V_{CB} = 20\text{ V}, I_E = 0$	I_{CB0}	–	–	100	nA
DC current gain, $I_C = 1\text{ mA}, V_{CE} = 10\text{ V}$ BF 840 BF 841	h_{FE}	65 35	– –	220 125	–
Base-emitter voltage $I_C = 1\text{ mA}, V_{CE} = 10\text{ V}$	V_{BE}	–	0.7	–	V

AC Characteristics

Transition frequency $I_C = 1\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ MHz}$	f_T	–	380	–	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, V_{BE} = v_{be} = 0, f = 1\text{ MHz}$	C_{cb}	–	0.3	–	pF
Noise figure $I_C = 1\text{ mA}, V_{CE} = 10\text{ V}, f = 100\text{ kHz}$ $R_S = 200\text{ }\Omega$	F	–	1.7	–	dB
Output conductance $I_C = 1\text{ mA}, V_{CE} = 10\text{ V}, f = 0.5\text{ MHz}$	g_{22e}	–	4	–	μS



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.